

**ModD-600-034O1 - 12v**

**ModD-600-034O2 - 24v**


## Areas of application


- Signage and illuminated advertising.
- Edge-lighting for Small light box and large light box.
- Best for 60mm ~ 150mm depth.

## Product main benefits

- New innovation optics lens design can get excellent homogeneous requirement (mynice Invention patent).
- 5 years warranty.
- 24VDC:130 lm/W;12VDC:110 lm/W.
- 2.4 W/module.

Innovation optics design  
(Utility Model Patent Protection)

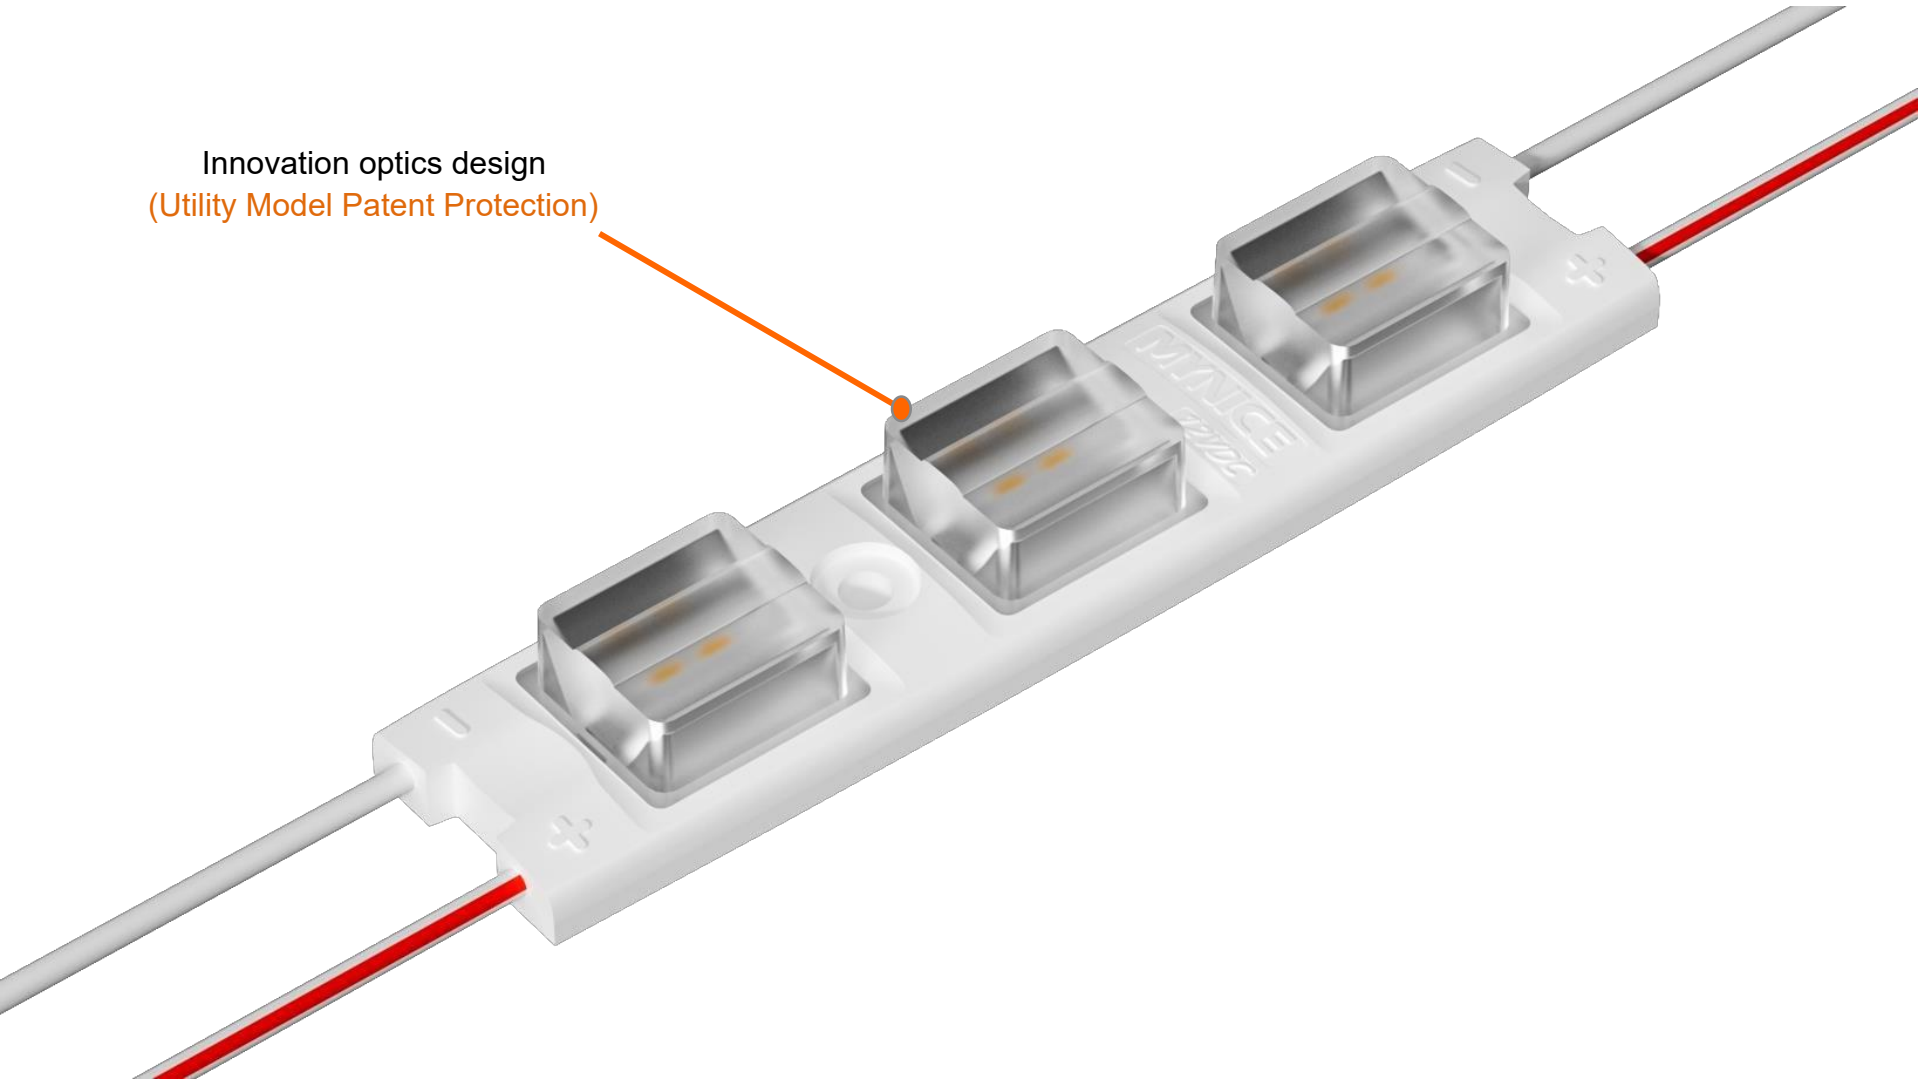

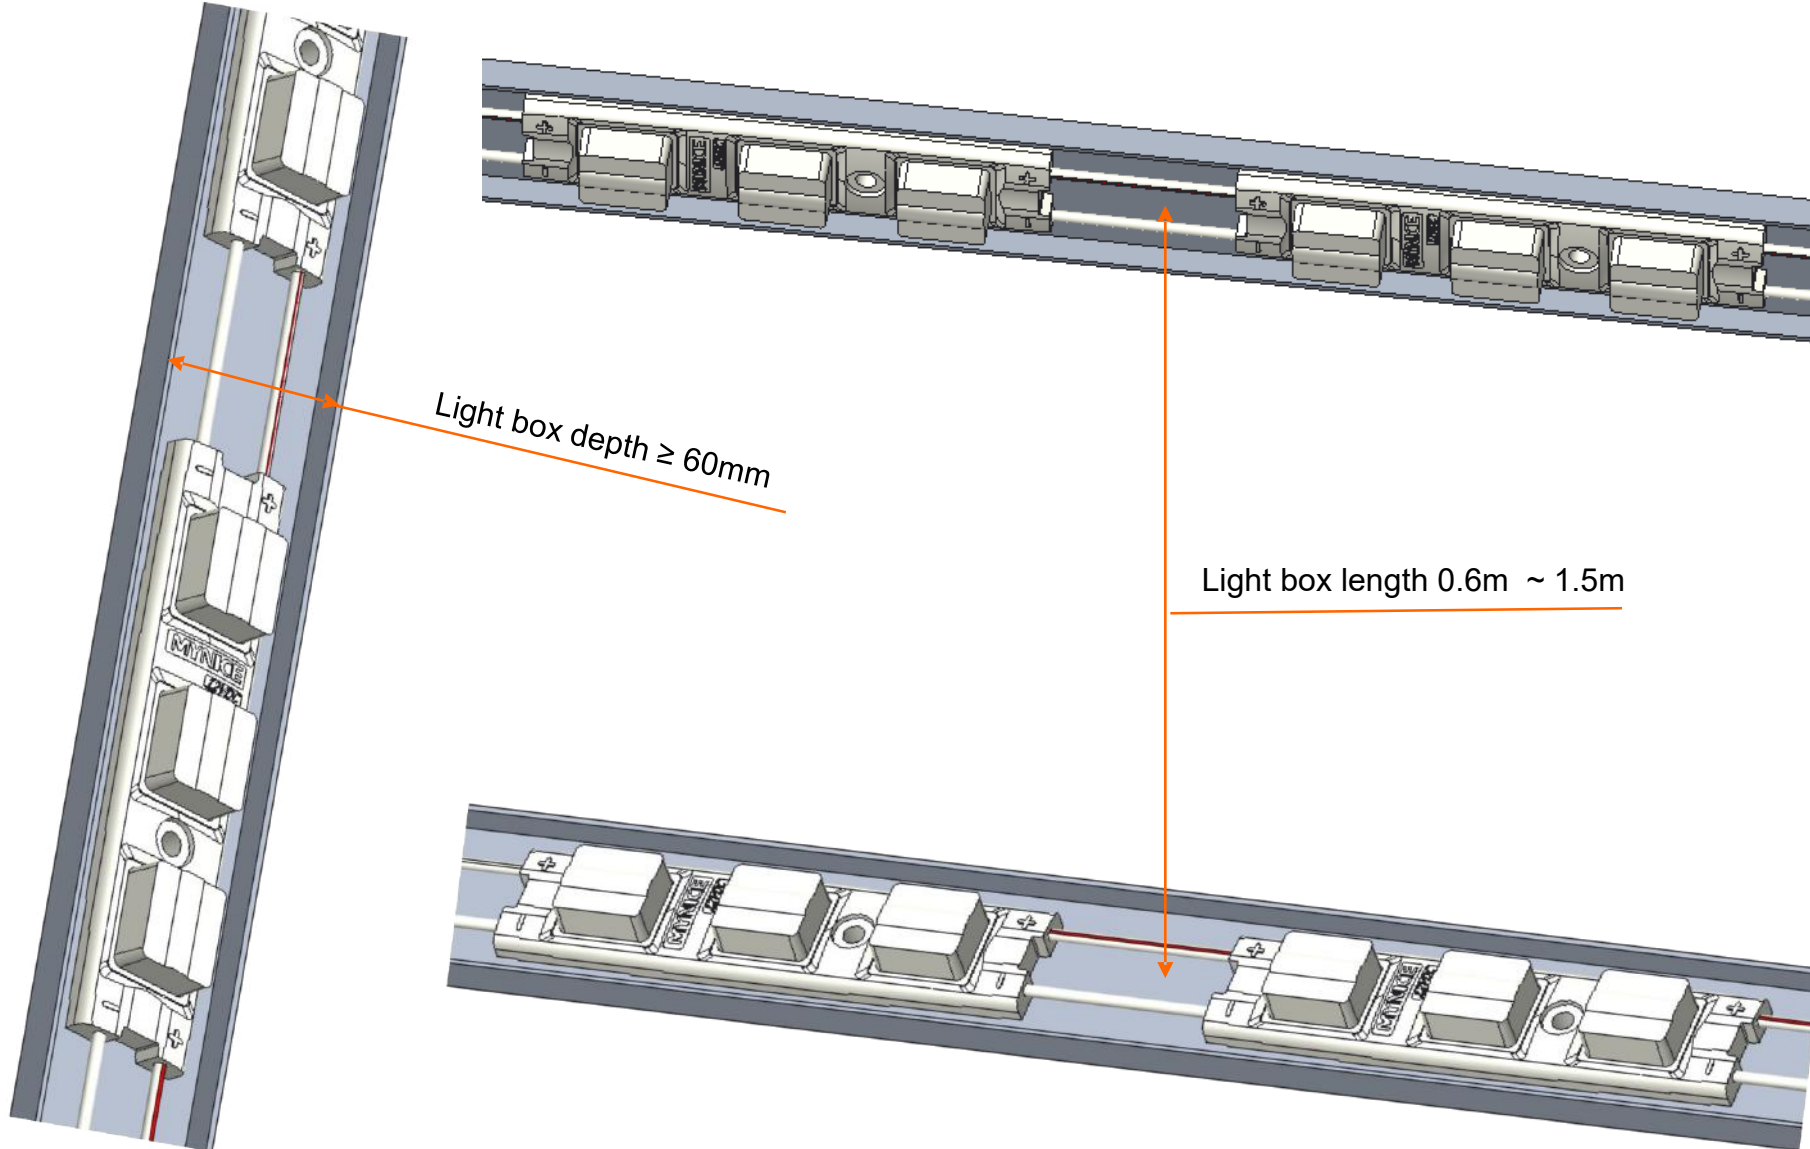

Grgvtlechn' cvc	V{ r lecn Xqnci g	Gpgti { Eqpuwo r vlap *Y 1o qf wrg+	Gpgti { Eqpuwo r vlap *Y 1ej clp+	Gpgti { Eqpuwo r vlap *Y 1h0+	Cf f wlapcn lptqto cvlap *o qf wrgu'ej clp+
ModD-600-034O1	12VDC	2.4	60	3.3	25
ModD-600-034O2	24VDC	2.4	72	3.9	30


  

Rj qvqo gvtlechn' cvc	Nli j v'eqrqt *f guki pcvlap+	Eqrqt *EEV. y cxgrgpi vj +	V{ r lecn Dtki j vpguu *nwo gp'1o qf wrg+	V{ r lecn Dtki j vpguu *nwo gp'1ej clp+	V{ r lecn Dtki j vpguu *nwo gp'1h0+
ModD-600-034O1	Cold white	5000K, 6500K	264	6600	365
ModD-300-034O1	Warm white	3000K, 4000K	250	6270	347
ModD-600-034O2	Cold white	5000K, 6500K	312	9360	512
ModD-300-034O2	Warm white	3000K, 4000K	296	8892	486


Remark:

1. Ranking at  $t_a = 25\text{ }^{\circ}\text{C}$
2. Constant current design.
3. Tolerance of measurements for power/lumen are  $\pm 10\%$ .

Operating Environment ( t )	-25°C to +55°C
Storage Temperature Range ( t )	-40°C to +85°C
IP Rating	IP66
Lifetime (L70B50)	5 years
tc temperature	80°C
Dimming mode	Dimmable
Cutting Resolution	Cut on wire between every module

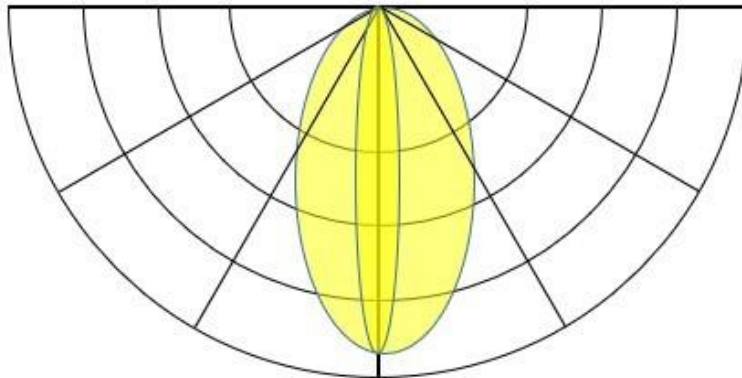


Beam angle: 15° x 85°

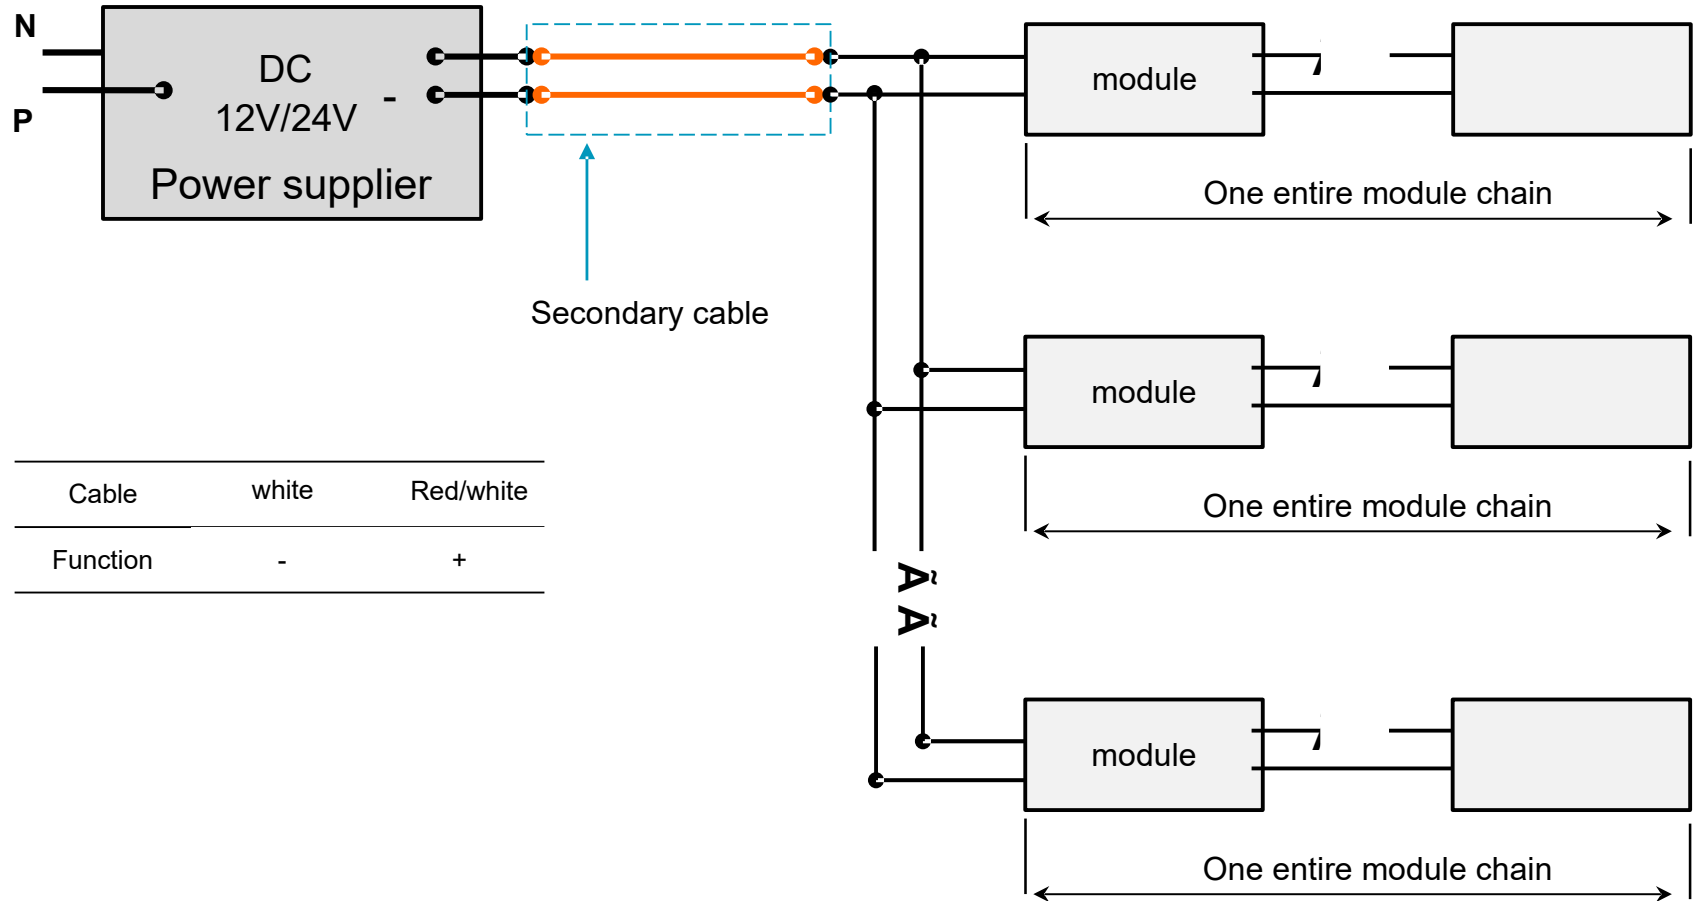

ModD-600-034O1

$$4531\text{mm}=170*24+96+177.5*2$$


[178.39inch]

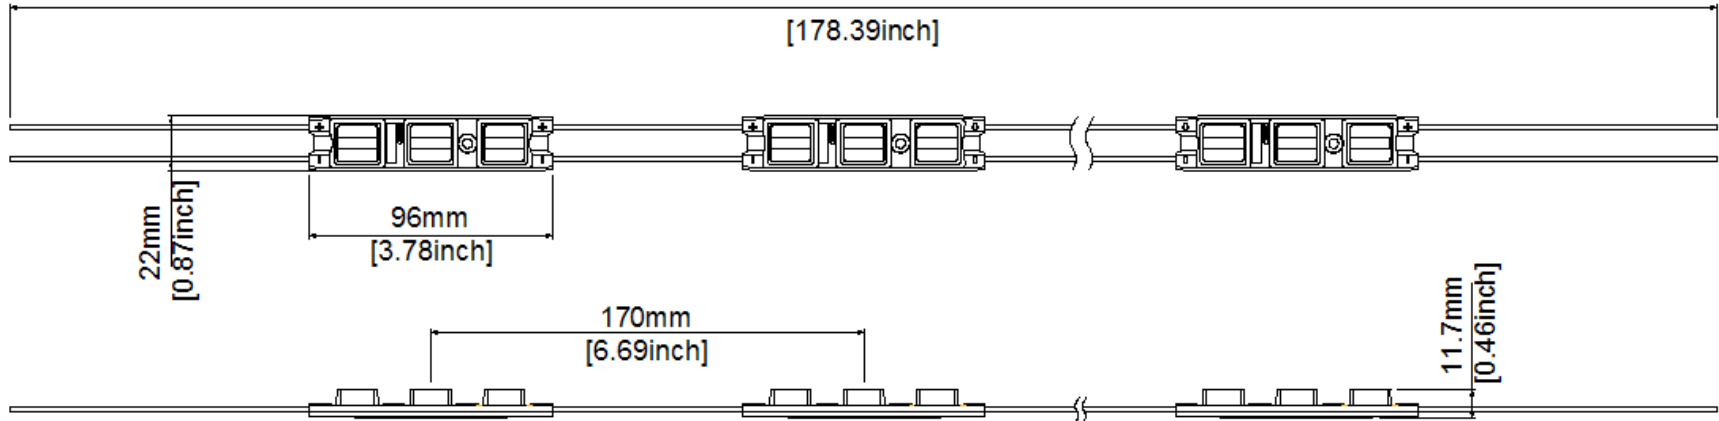

ModD-600-034O2

$$5381\text{mm}=170*29+96+177.5*2$$

[211.85inch]

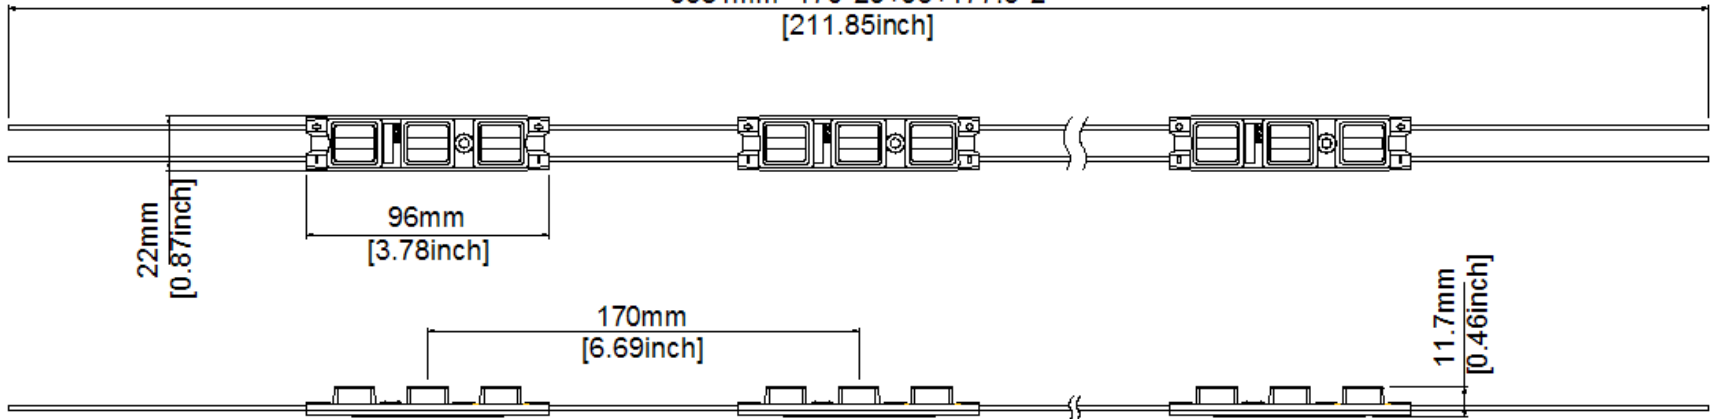

## Additional information:

- Installation of LED modules (with power supplies) needs to be made under consideration of all valid regulations and norms.
- Installation by qualified electrician only.
- Parallel connection is mandatory for safe electrical operation. Serial connection of LED modules is discouraged. Unbalanced voltage drop in serial connection can cause hazardous overload
- Electrical contact is achieved with the contact cables or the terminals of the module. Please refer to the technical data for maximum number of LED modules that can be operated on one control gear.
- To avoid mechanical damage, the LED modules have to be attached securely to the intended mounting surface. It is recommended to avoid heavy vibration.
- LED modules are dimmable by means of PWM (pulse width modulation).