

Report No.:

Test Time: 02/08/2018 16:42

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-DW04-06 + LLD-06-CM

Lamp Description: F52-400-60822

Number of Lamps: 1

Lumens per Lamp: 1579 lm

Voltage: 24.0 V

Current: 0.595 A

Power: 14.29 W

Power Factor: 1.000

Photometric Results

CIE Class: Semi-Direct

Measurement Flux: 985.2 lm

Downward Ratio: 55.71%

Total Rated Lamp Lumens: 1579.0 lm

Efficiency: 62.39%

Upward Ratio: 6.68%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 238.4, 173.7, 164.9, 253.4

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 130.5, 122.5, 117.0, 132.8

Luminaire Efficacy Rating (LER): 68.99

Central Intensity: 259.03 cd


Max. Intensity: 259.45 cd

Pos of Max. Intensity: H330 V4


S/MH(C0/C180): 1.36

S/MH(C90/C270): 1.31

Picture Of Luminaire

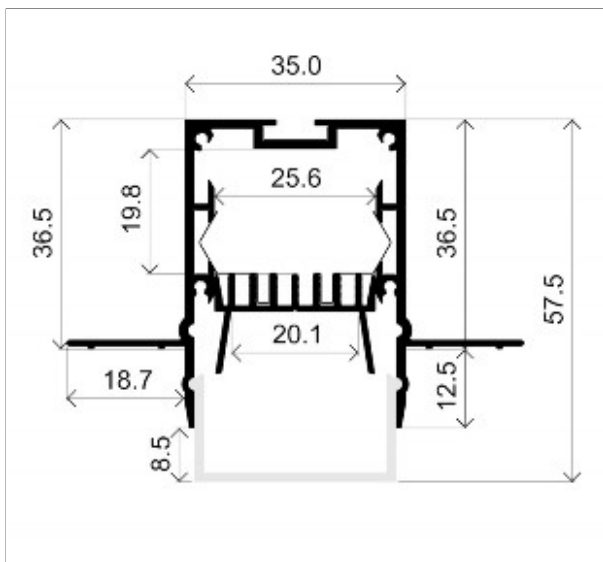

Luminous Intensity Distribution Curve

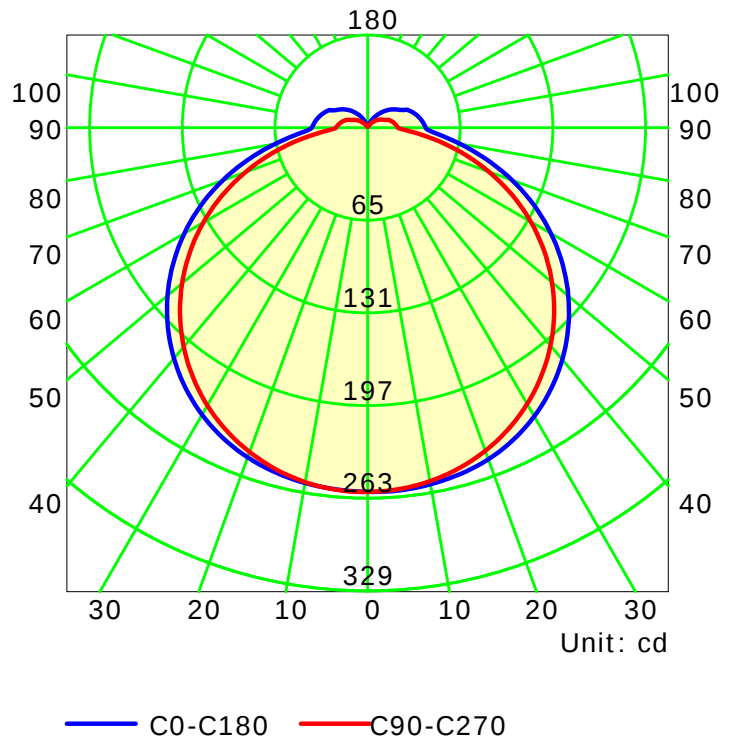

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

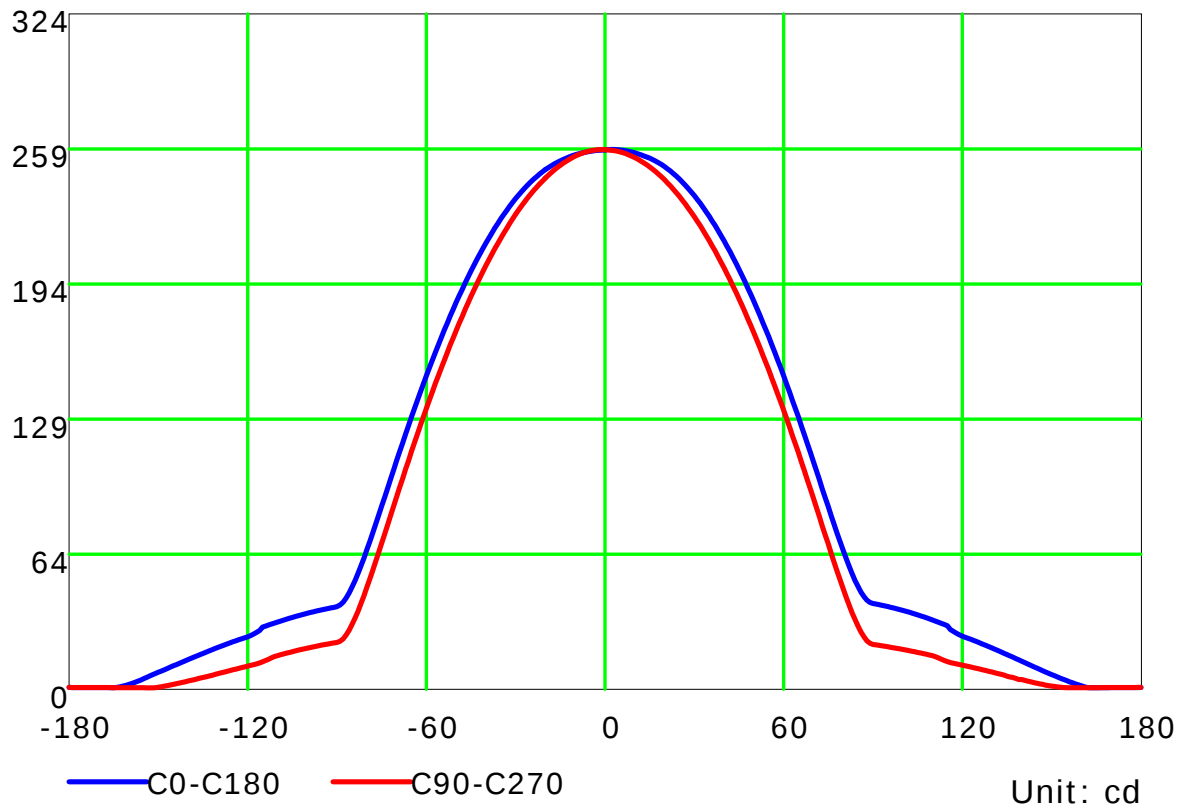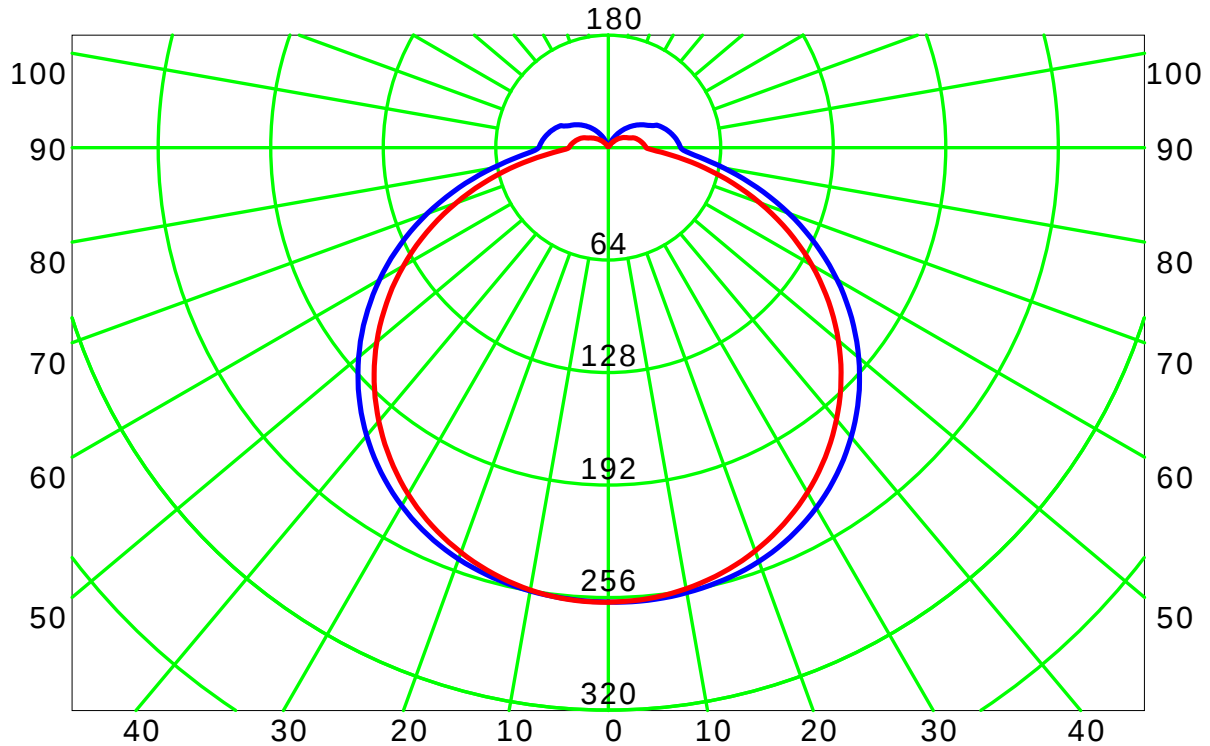

C Plane (°): 0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°): 0.0-180.0: 1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve(cd / klm)

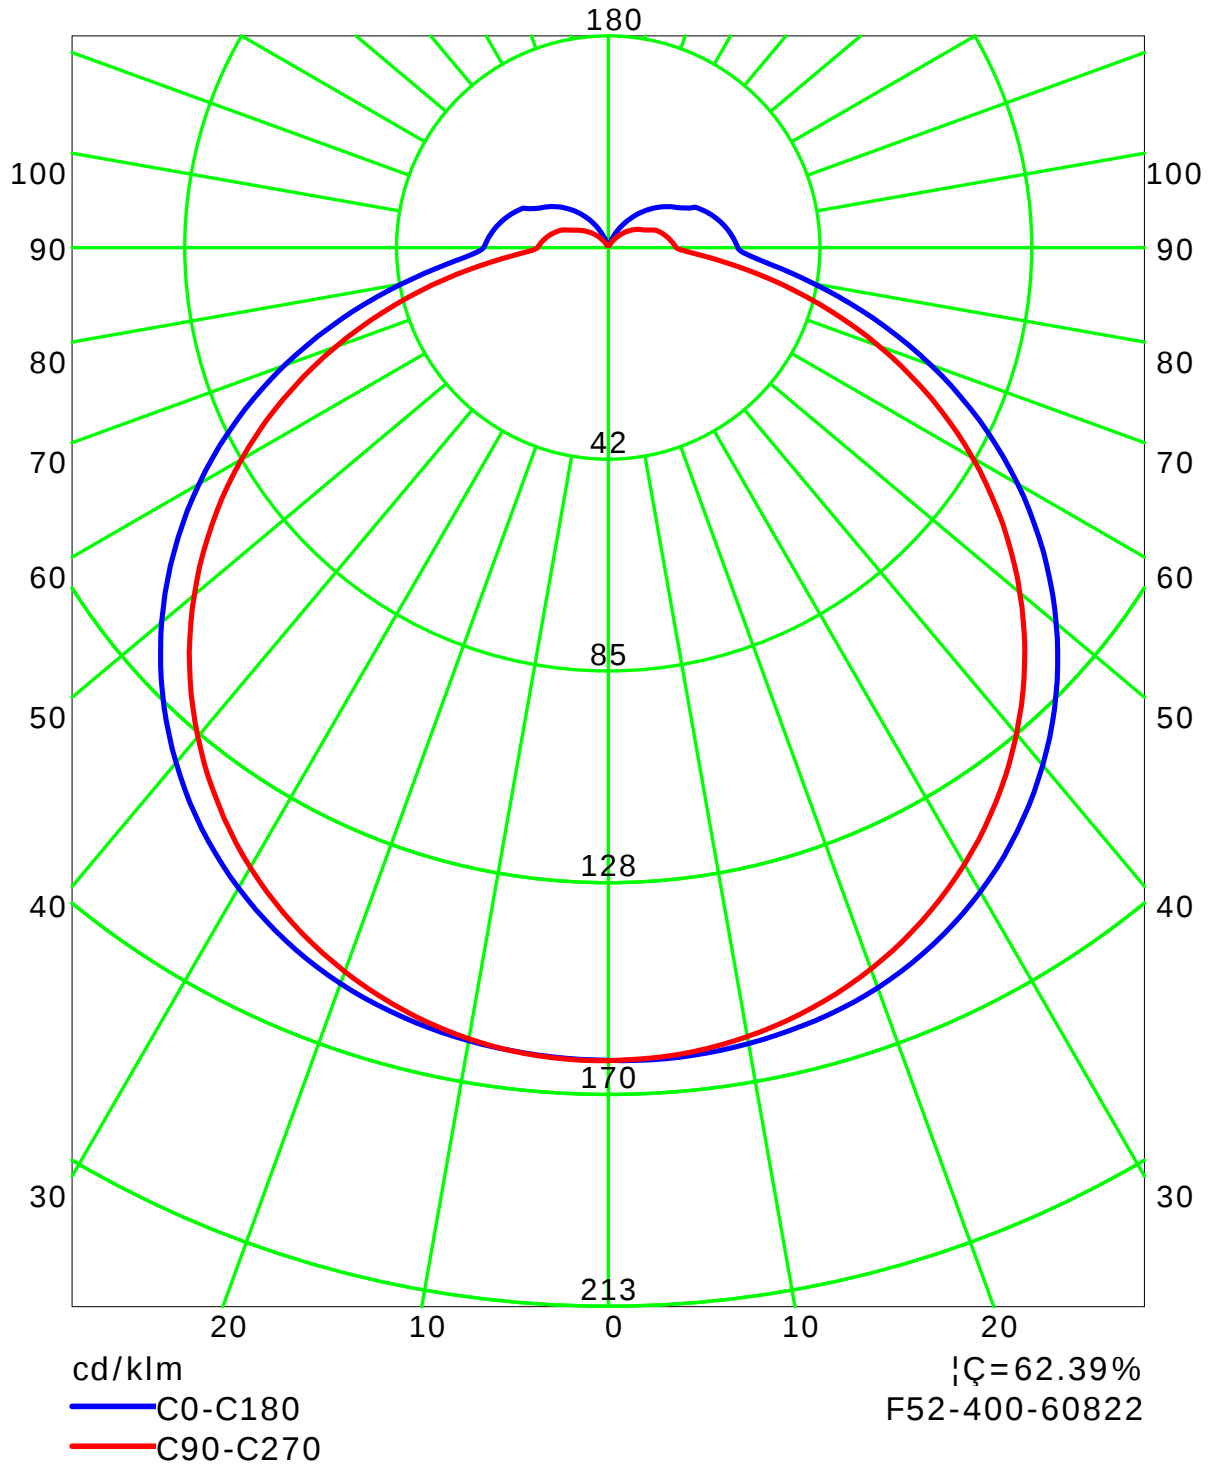

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-2000
Distance: 7.970 m
Humidity:
Inspector:

Isocandela (rectangle)

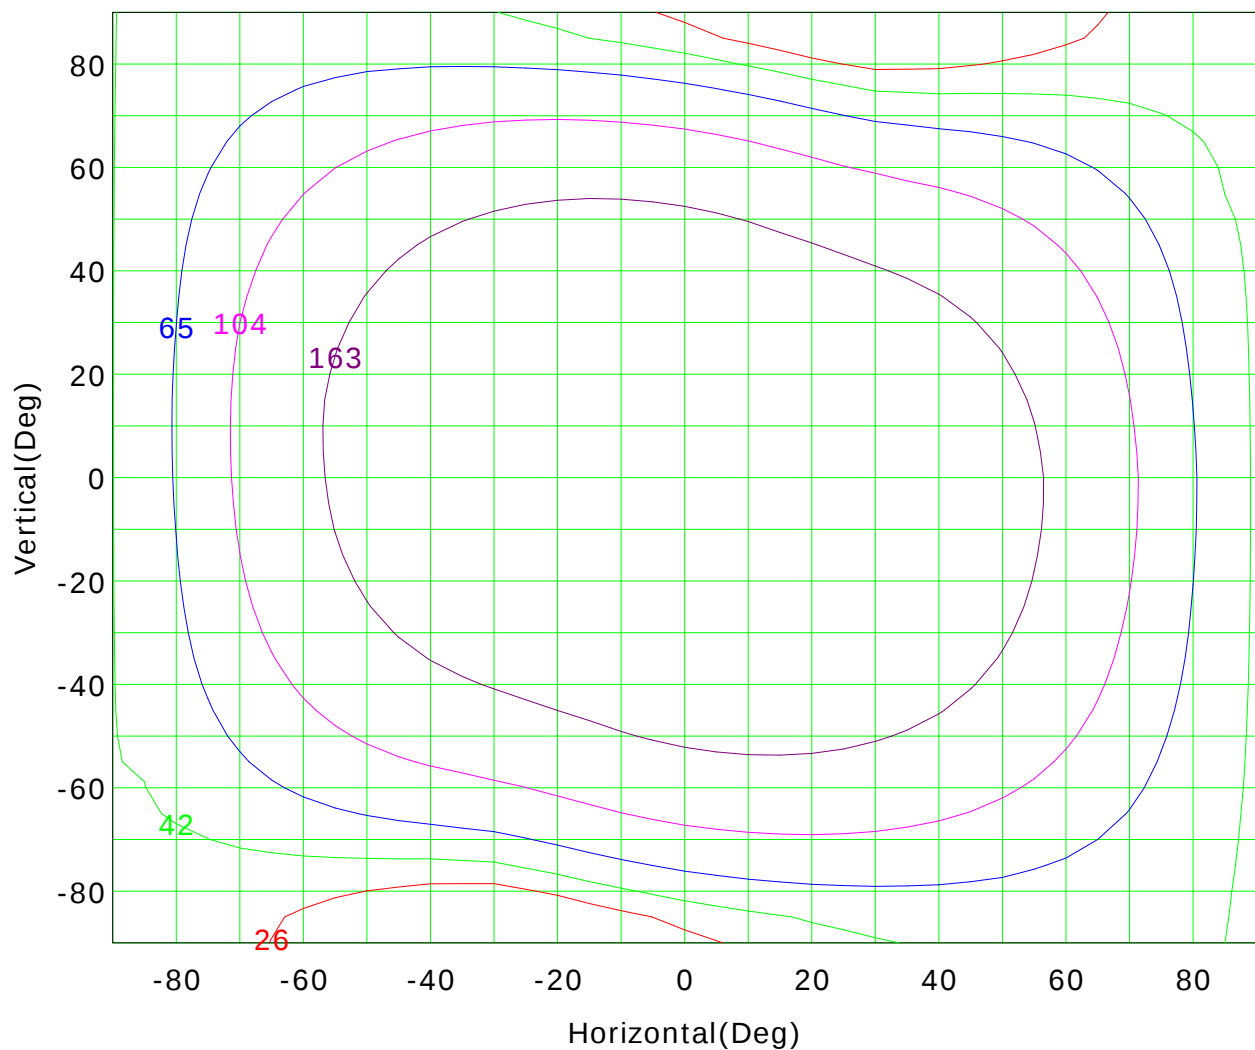

I_{max} (100%): 259 cd

(10%):	26 cd	(16%):	42 cd
(25%):	65 cd	(40%):	104 cd
(63%):	163 cd	(100%):	259 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Isocandela (sphere)

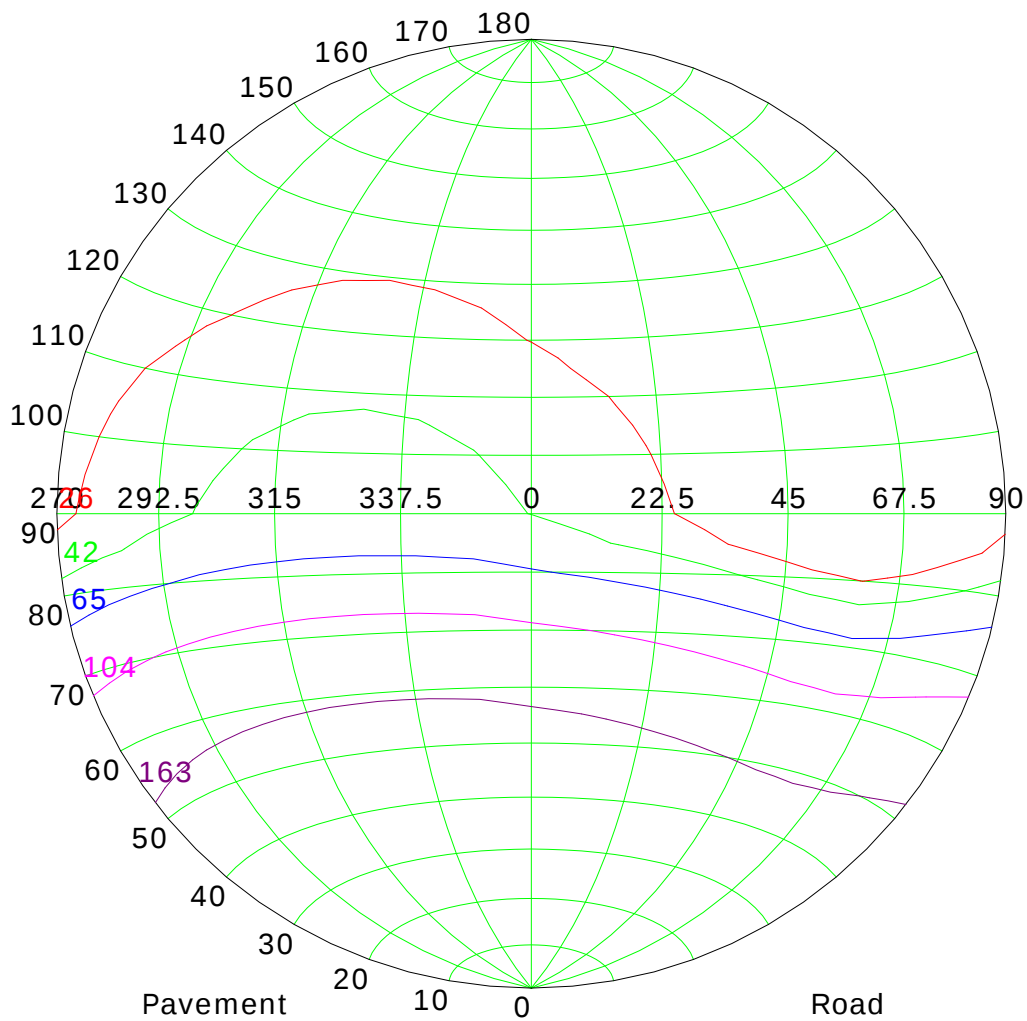

Imax (100%): 259 cd

(10%):	26 cd	(16%):	42 cd
(25%):	65 cd	(40%):	104 cd
(63%):	163 cd	(100%):	259 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

IsoLux Plot

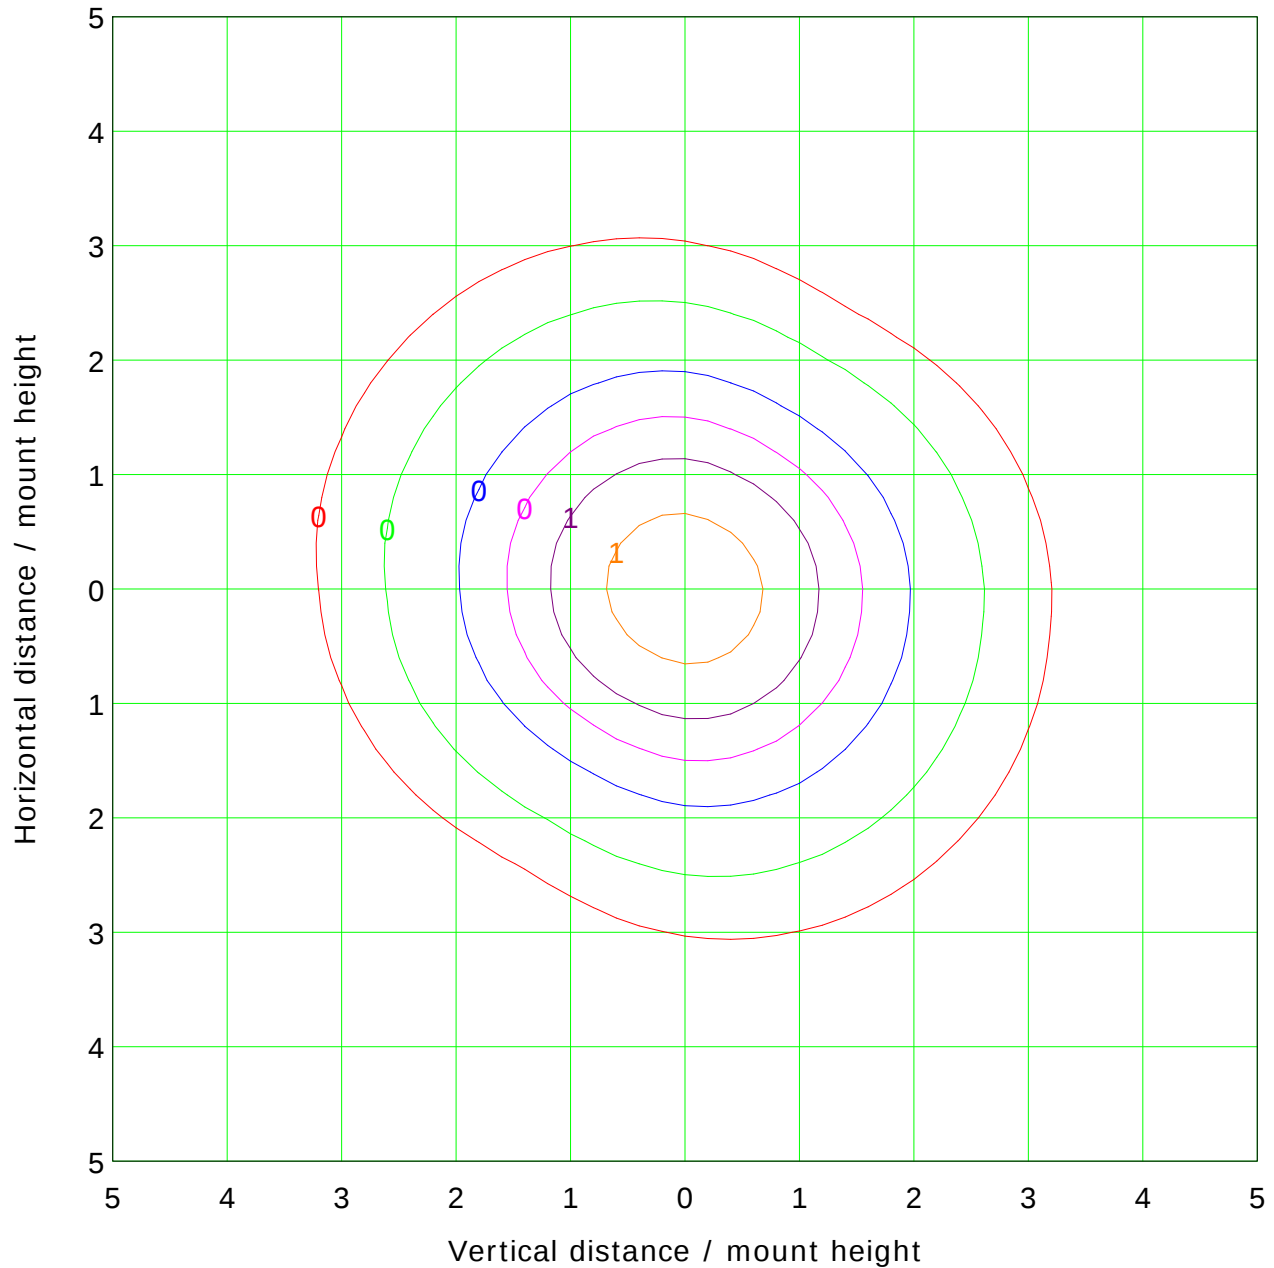

Mounting Height: 10.0m Max Lux(100%): 2.6 lx

(1%): 0.0 lx	(2%): 0.1 lx
(5%): 0.1 lx	(10%): 0.3 lx
(20%): 0.5 lx	(50%): 1.3 lx
(100%): 2.6 lx	

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

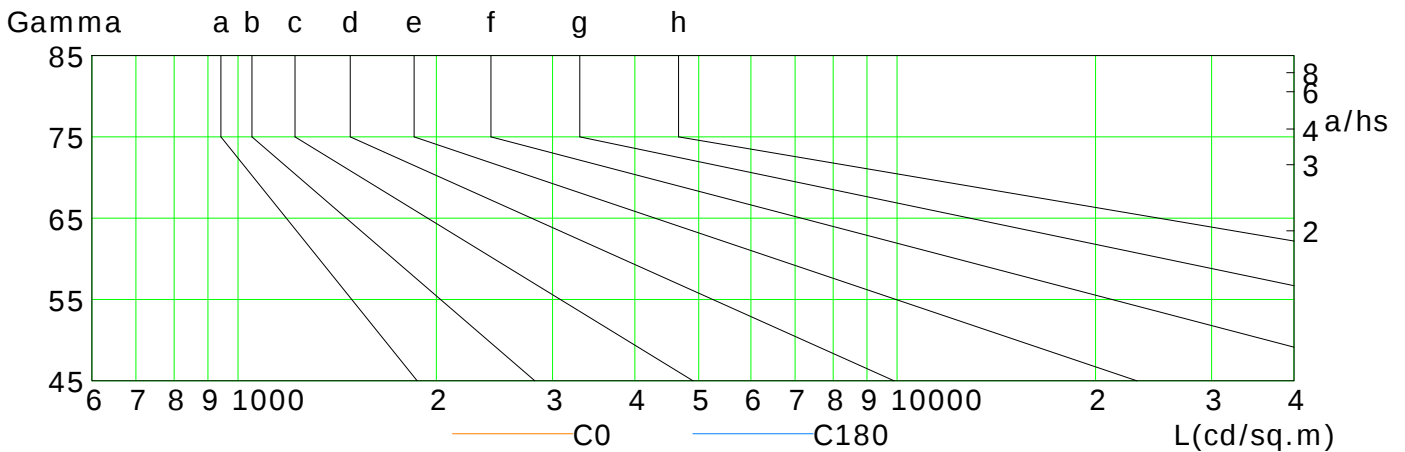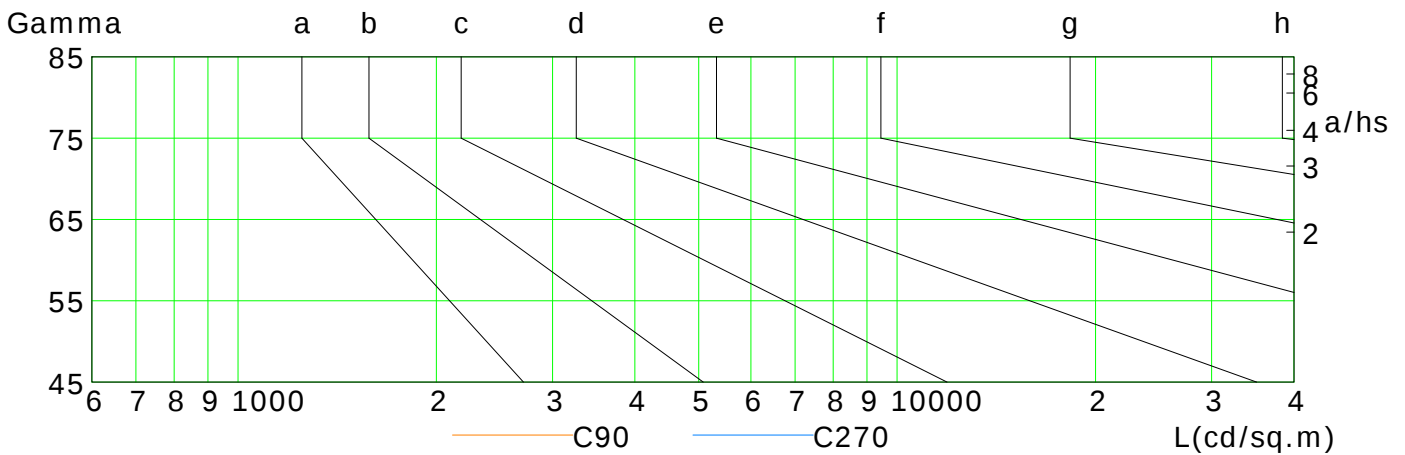

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	202	186	169	151	131	109	88	67	49
C90	188	171	153	134	114	92	70	48	30
C180	201	186	169	151	131	110	88	67	49
C270	189	172	154	135	114	92	70	49	31

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m


Humidity:

Inspector:

Illuminance at a Distance

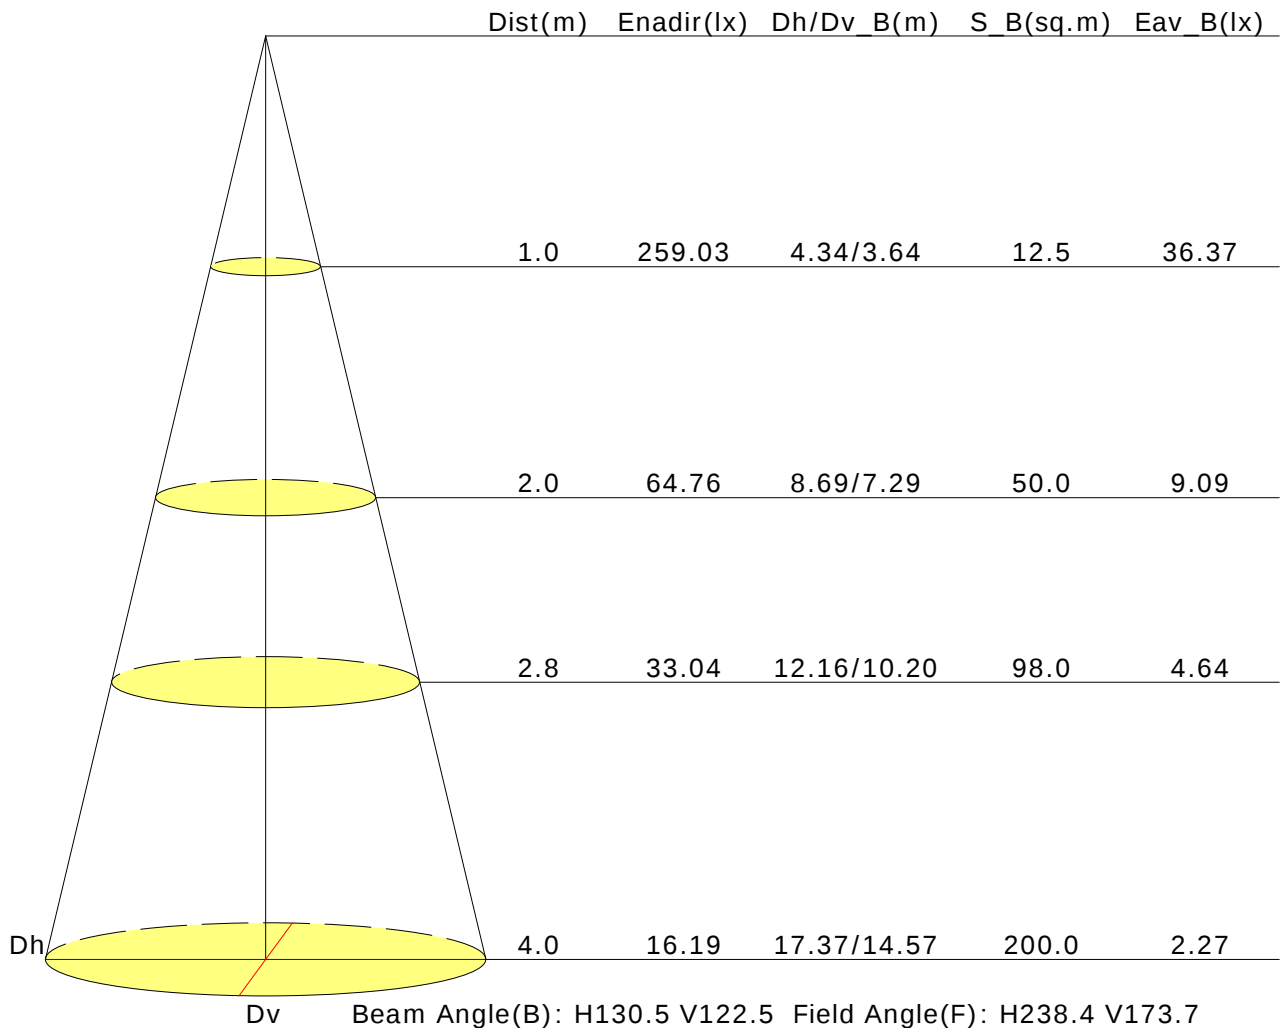

Vertical IsoLux Plot

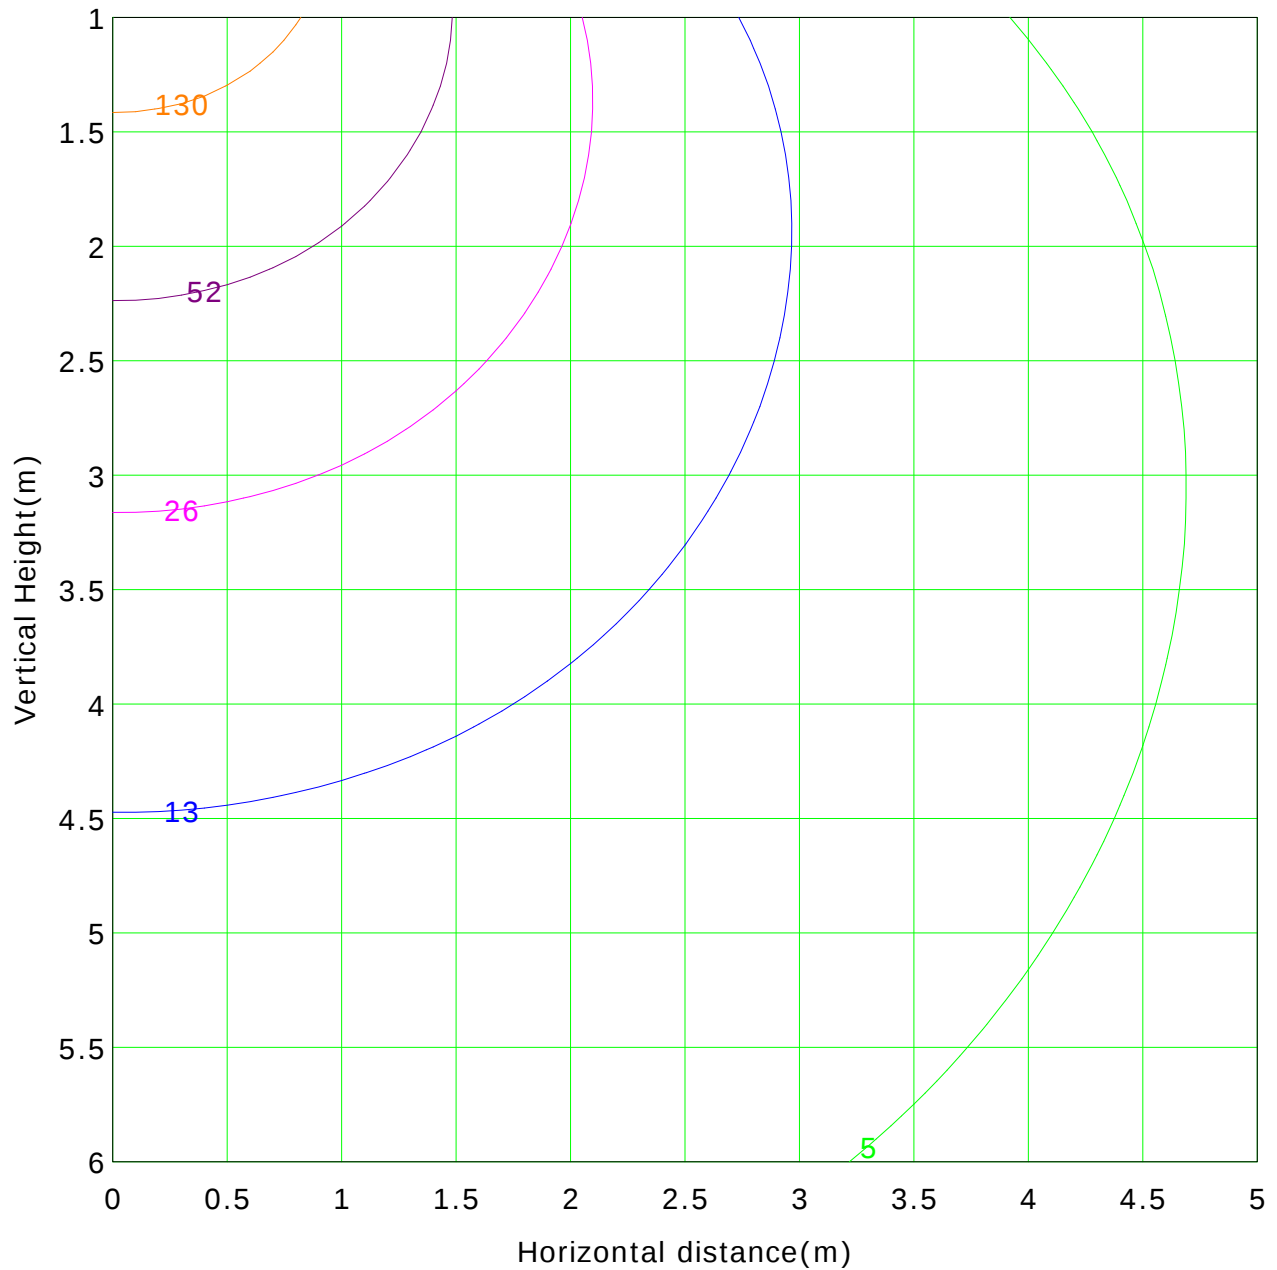

Lowest(m): 1.0m Highest(m): 6.0m Max Lux: 259.0 lx

(1%): 2.6 lx	(2%): 5.2 lx
(5%): 13.0 lx	(10%): 25.9 lx
(20%): 51.8 lx	(50%): 129.5 lx
(100%): 259.0 lx	

Report No.:

Test Time: 02/08/2018 12:55

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-DW04-06 + LLD-06-CM

Lamp Description: F52-400-60822

Number of Lamps: 1

Lumens per Lamp: 1579 lm

Voltage: 24.0 V

Current: 0.592 A

Power: 14.19 W

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 922.7 lm

Downward Ratio: 58.23%

Total Rated Lamp Lumens: 1579.0 lm

Efficiency: 58.44%

Upward Ratio: 0.20%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 160.4, 159.9, 160.1, 160.2

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 114.1, 113.2, 113.7, 113.7

Luminaire Efficacy Rating (LER): 65.08

Central Intensity: 318.74 cd


Max. Intensity: 321.84 cd

Pos of Max. Intensity: H300 V1


S/MH(C0/C180): 1.27

S/MH(C90/C270): 1.26

Picture Of Luminaire

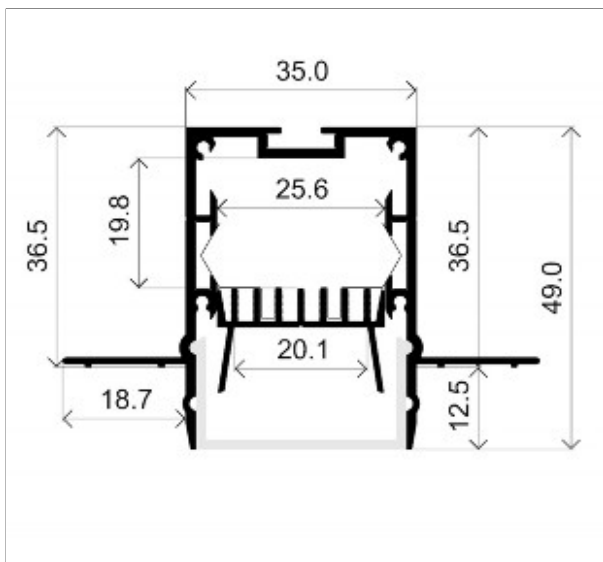

Luminous Intensity Distribution Curve

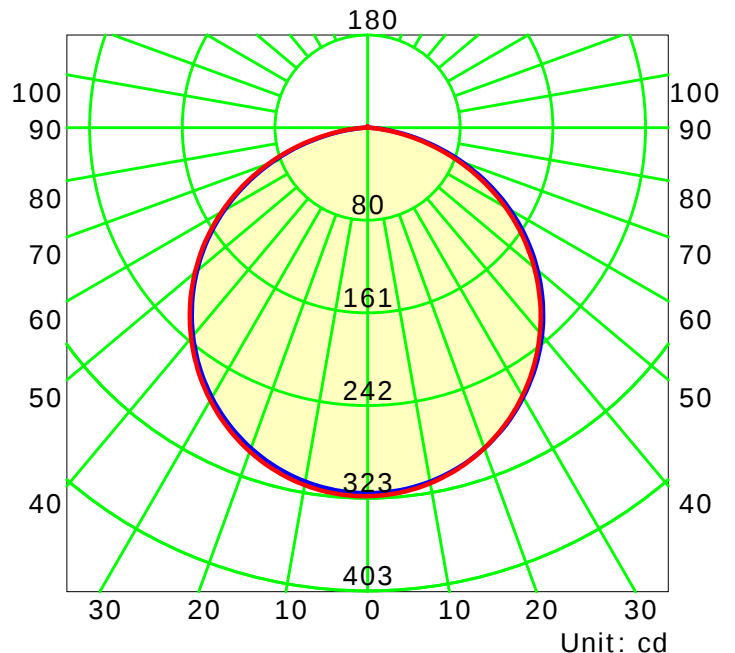

— C0-C180 — C90-C270

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

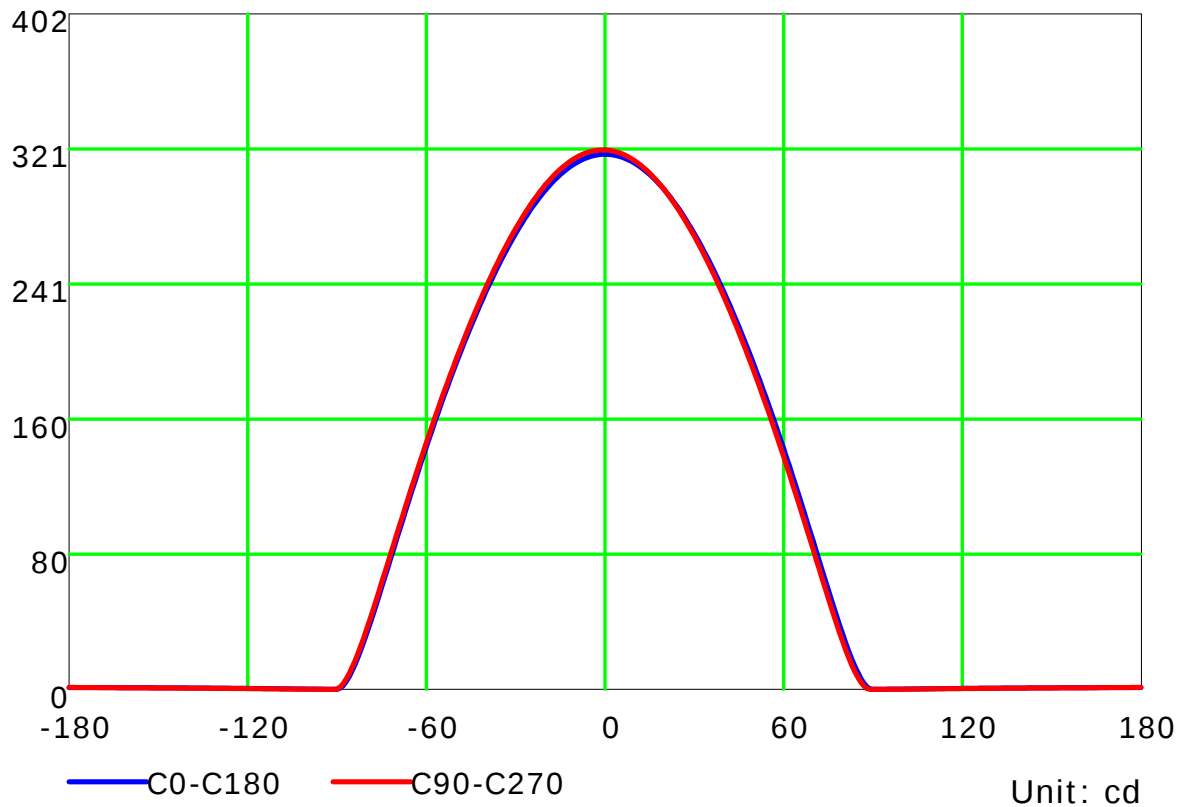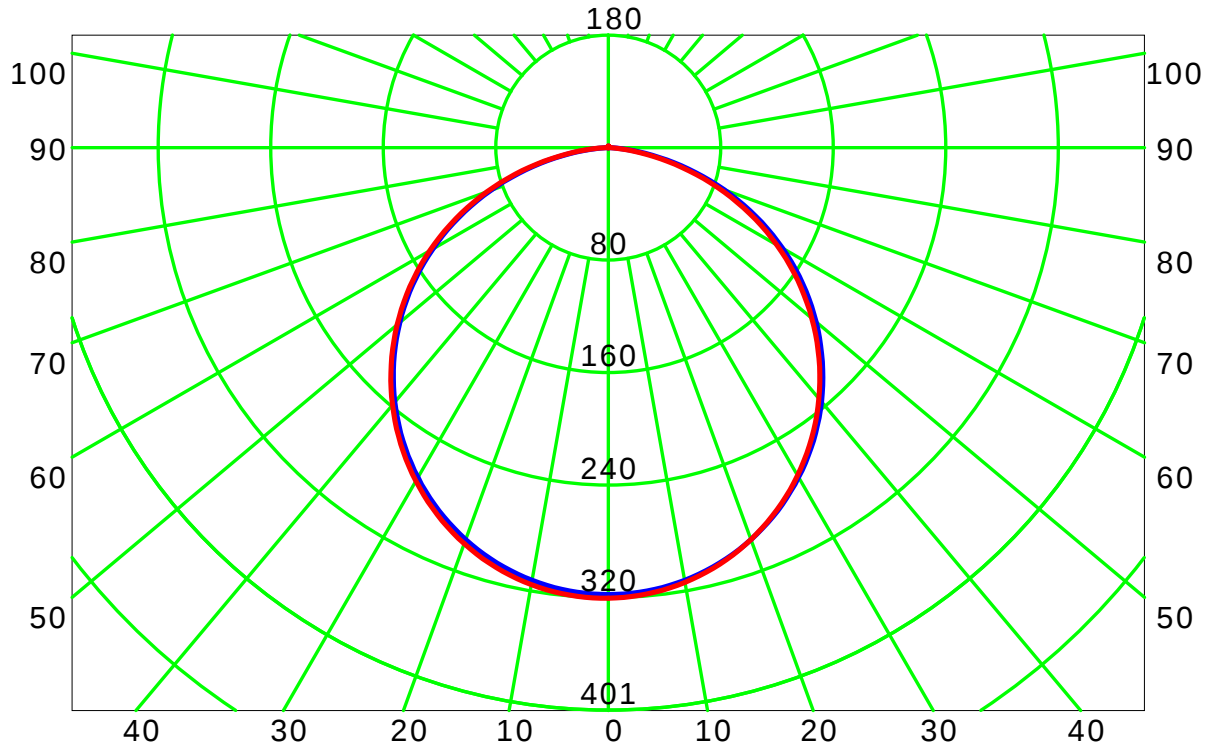

C Plane (°): 0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°): 0.0-180.0: 1.0


Test Device: GPM-2000

Distance: 7.970 m


Humidity:

Inspector:

Luminous Intensity Distribution Curve(cd / klm)

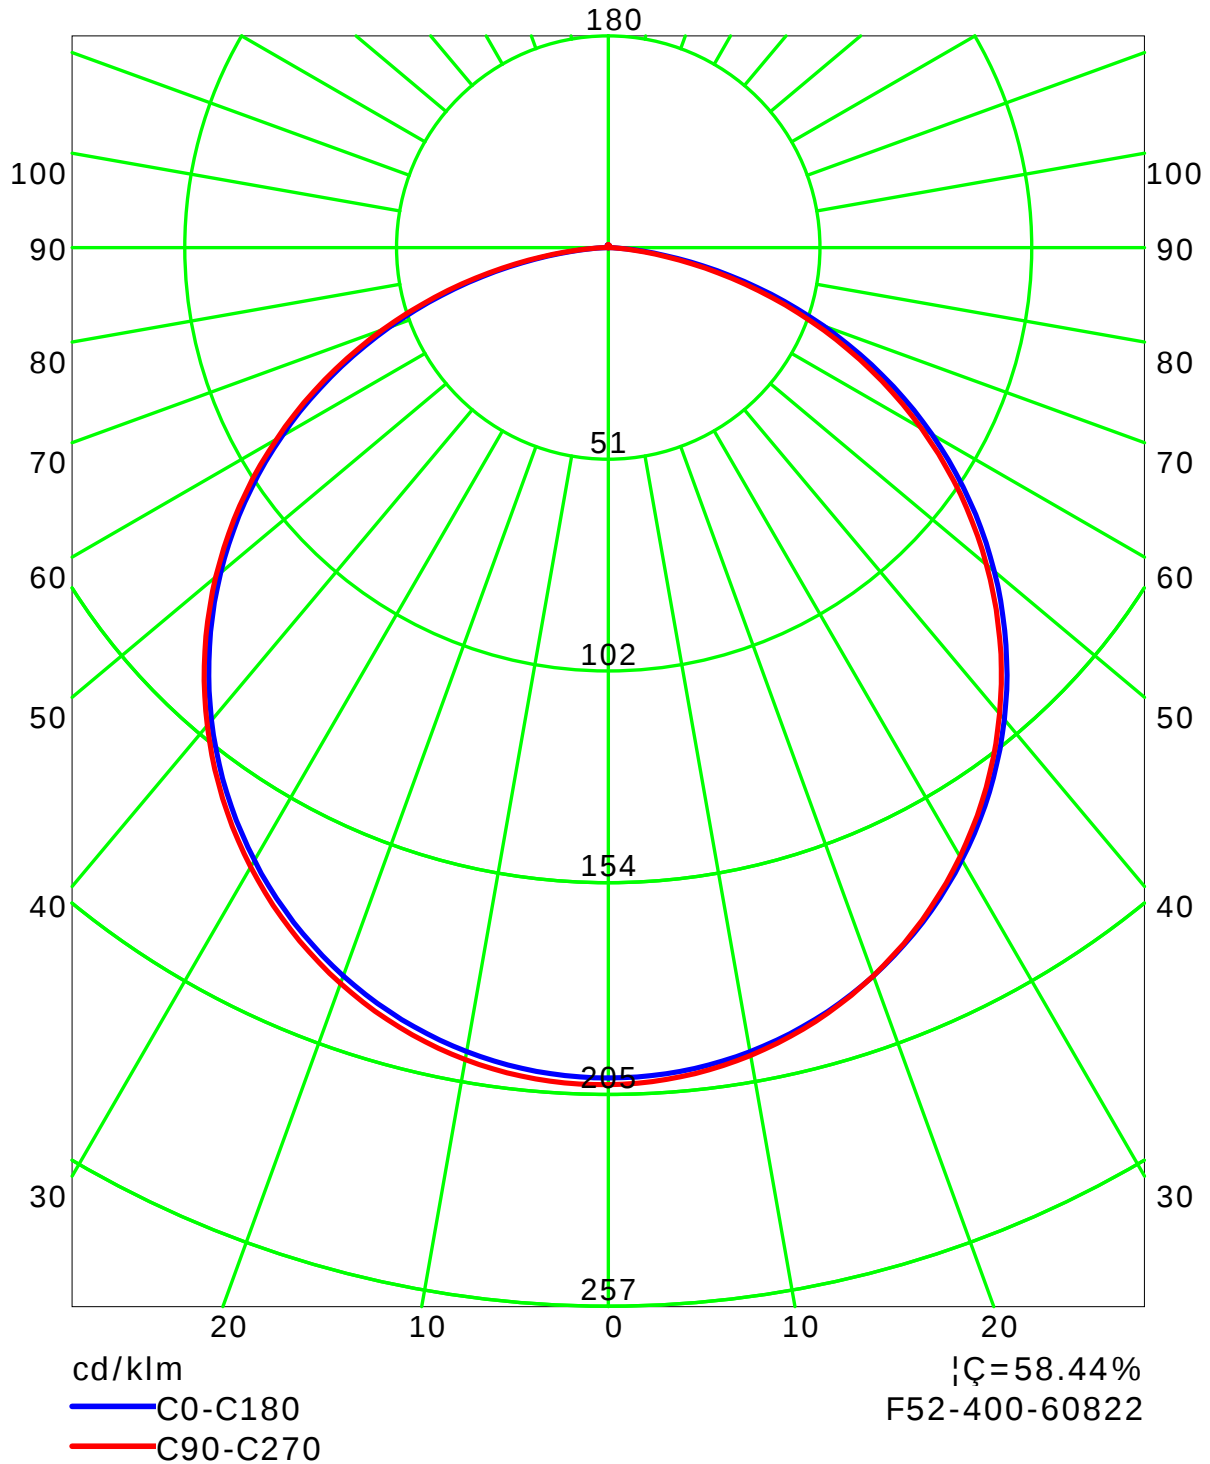

Isocandela (rectangle)

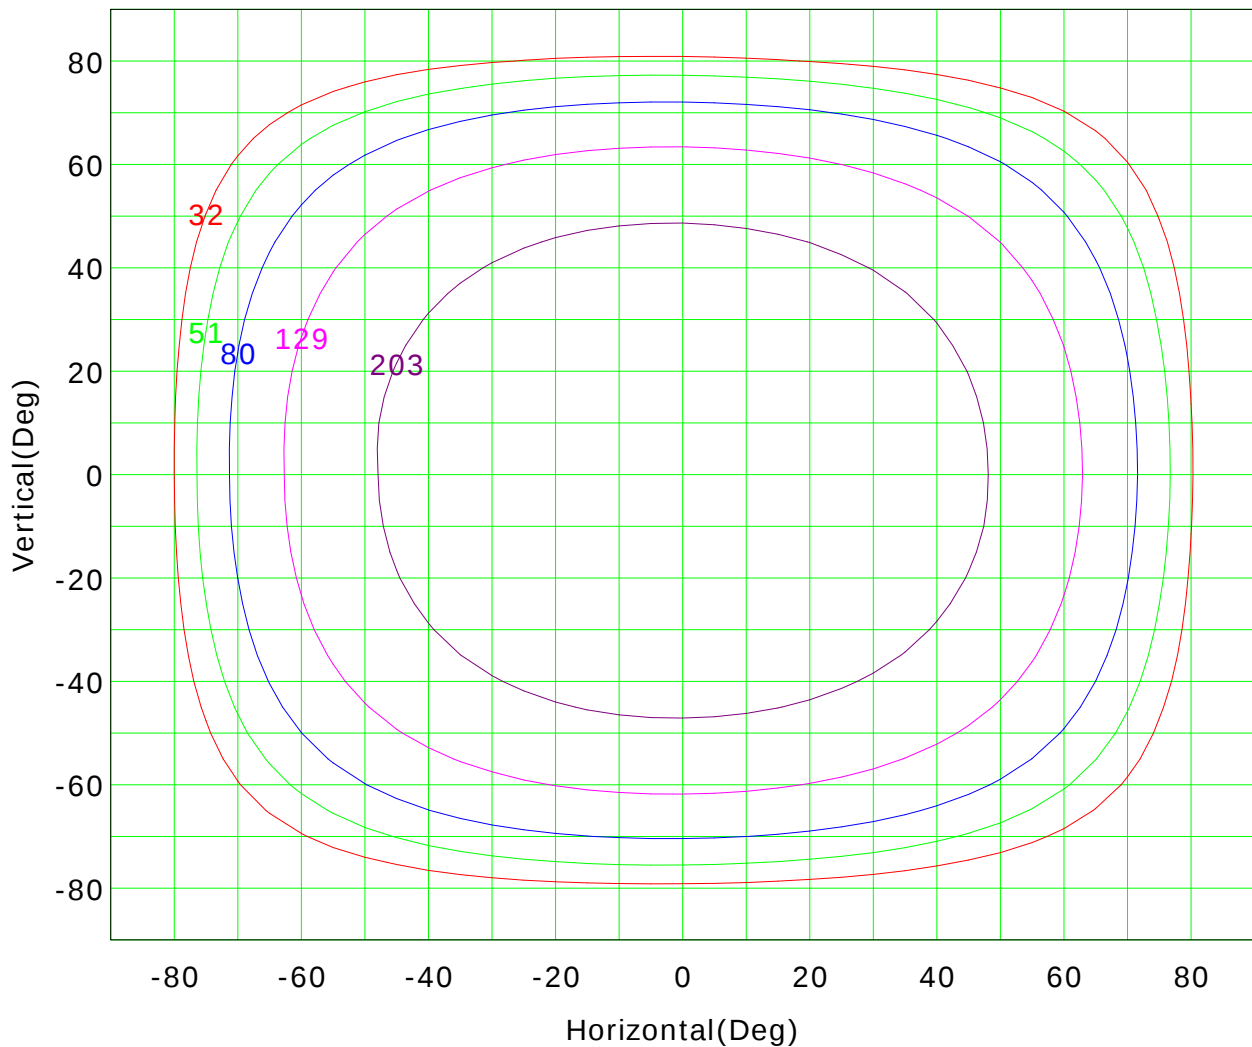

I_{max} (100%): 322 cd

(10%):	32 cd	(16%):	51 cd
(25%):	80 cd	(40%):	129 cd
(63%):	203 cd	(100%):	322 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Isocandela (sphere)

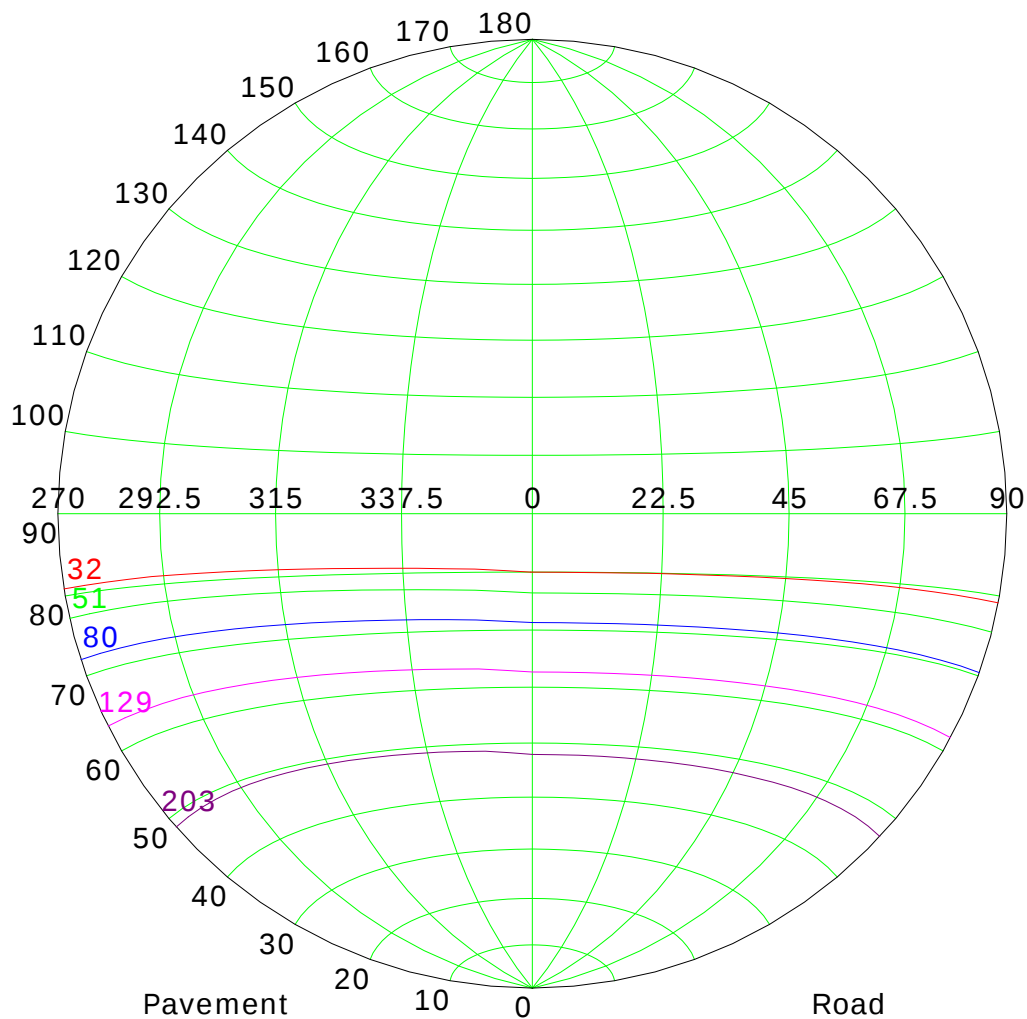

I_{max} (100%): 322 cd

(10%):	32 cd	(16%):	51 cd
(25%):	80 cd	(40%):	129 cd
(63%):	203 cd	(100%):	322 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

IsoLux Plot

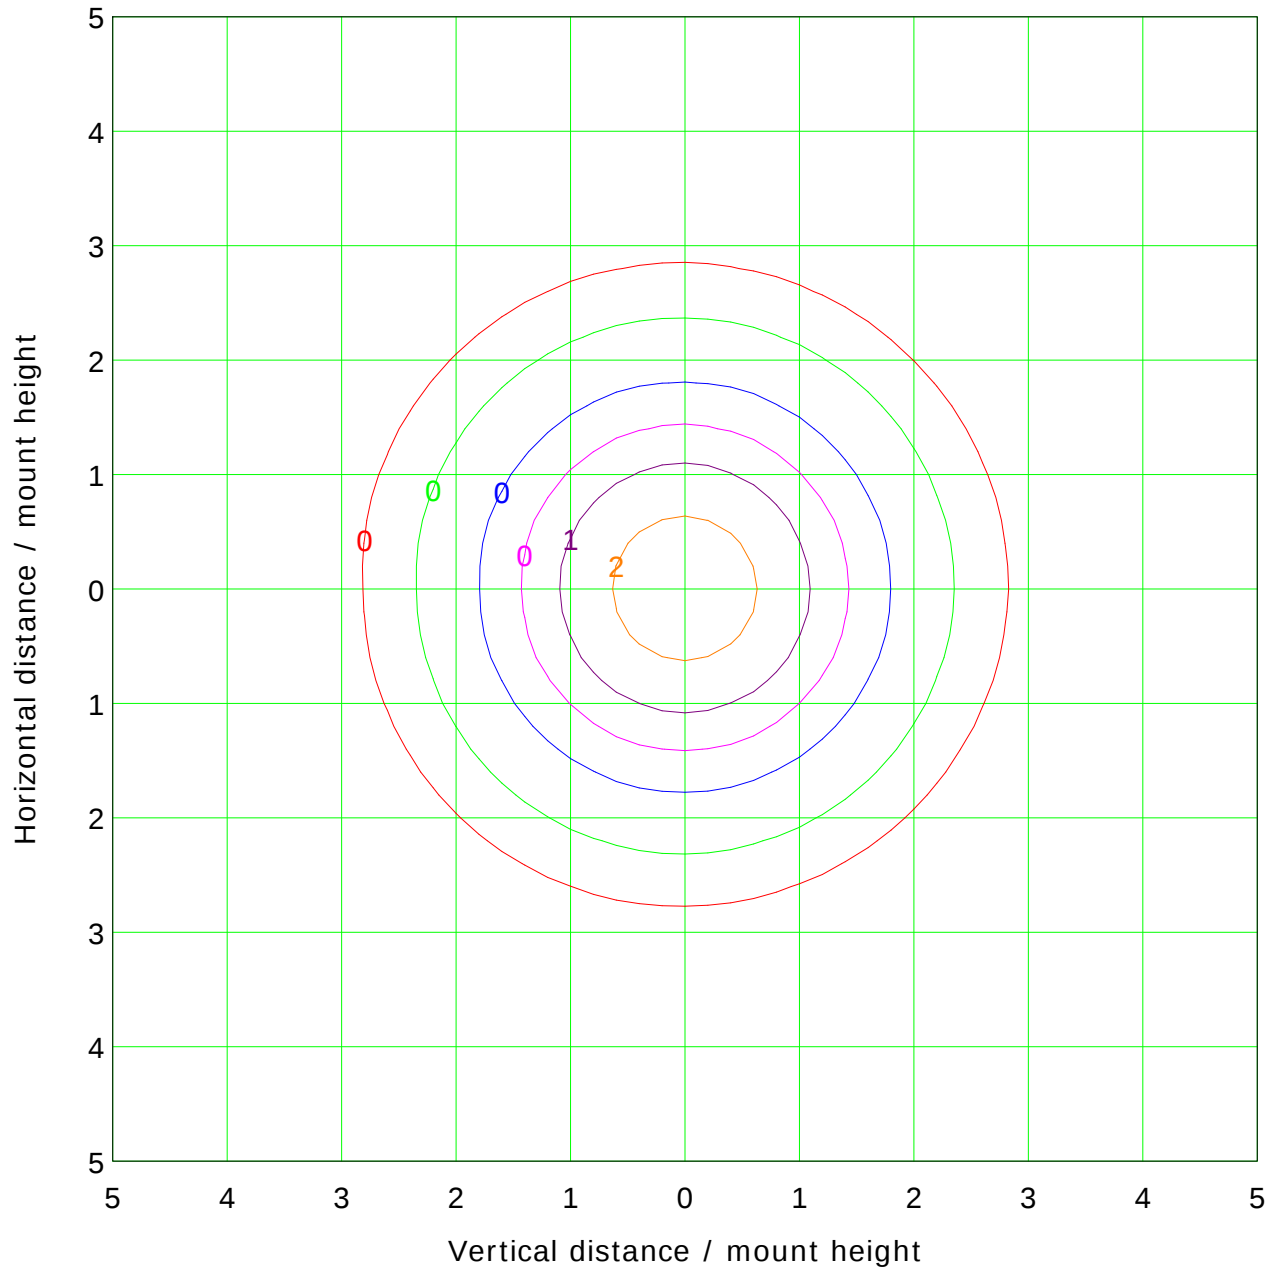

Mounting Height: 10.0m		Max Lux(100%): 3.2 lx	
— (1%):	0.0 lx	— (2%):	0.1 lx
— (5%):	0.2 lx	— (10%):	0.3 lx
— (20%):	0.6 lx	— (50%):	1.6 lx
— (100%):	3.2 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

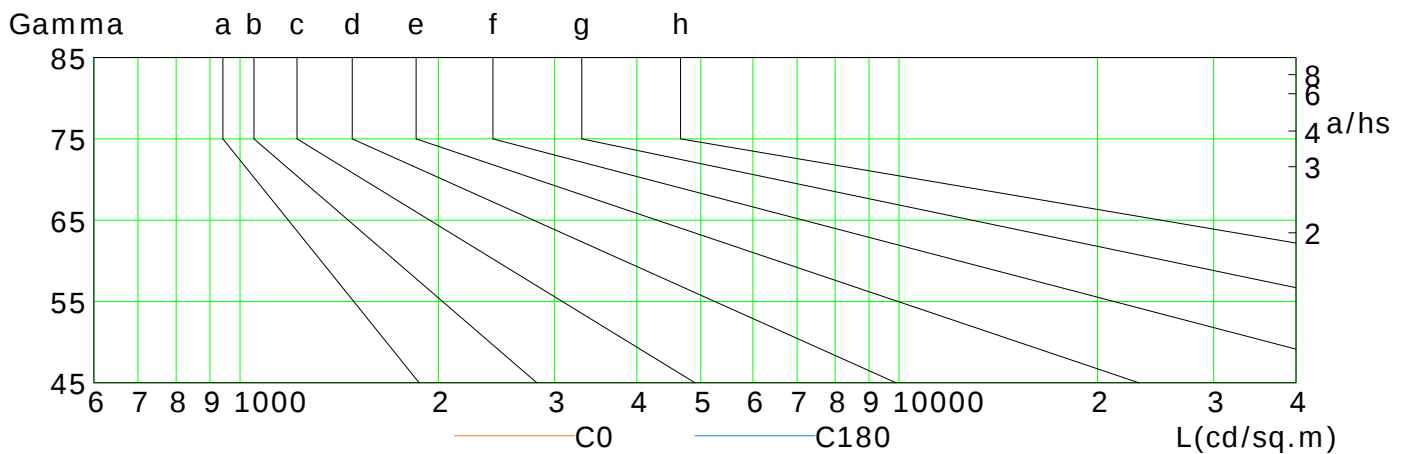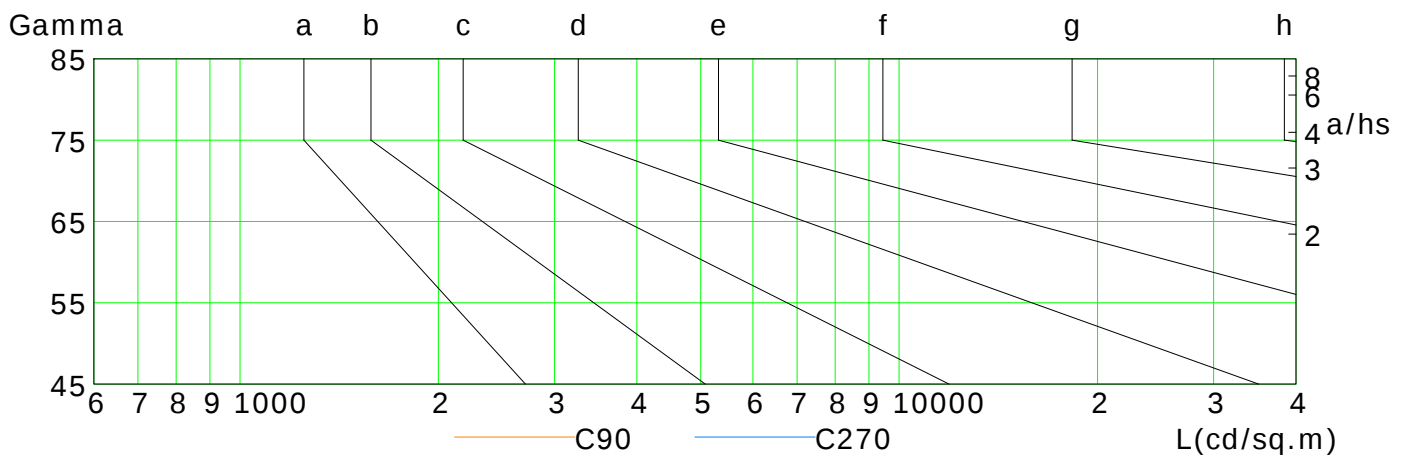

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	216	193	169	143	116	88	59	32	10
C90	212	189	165	139	111	83	54	28	7
C180	216	194	170	145	118	90	61	34	11
C270	219	197	173	147	120	92	64	36	13

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m


Humidity:

Inspector:

Illuminance at a Distance

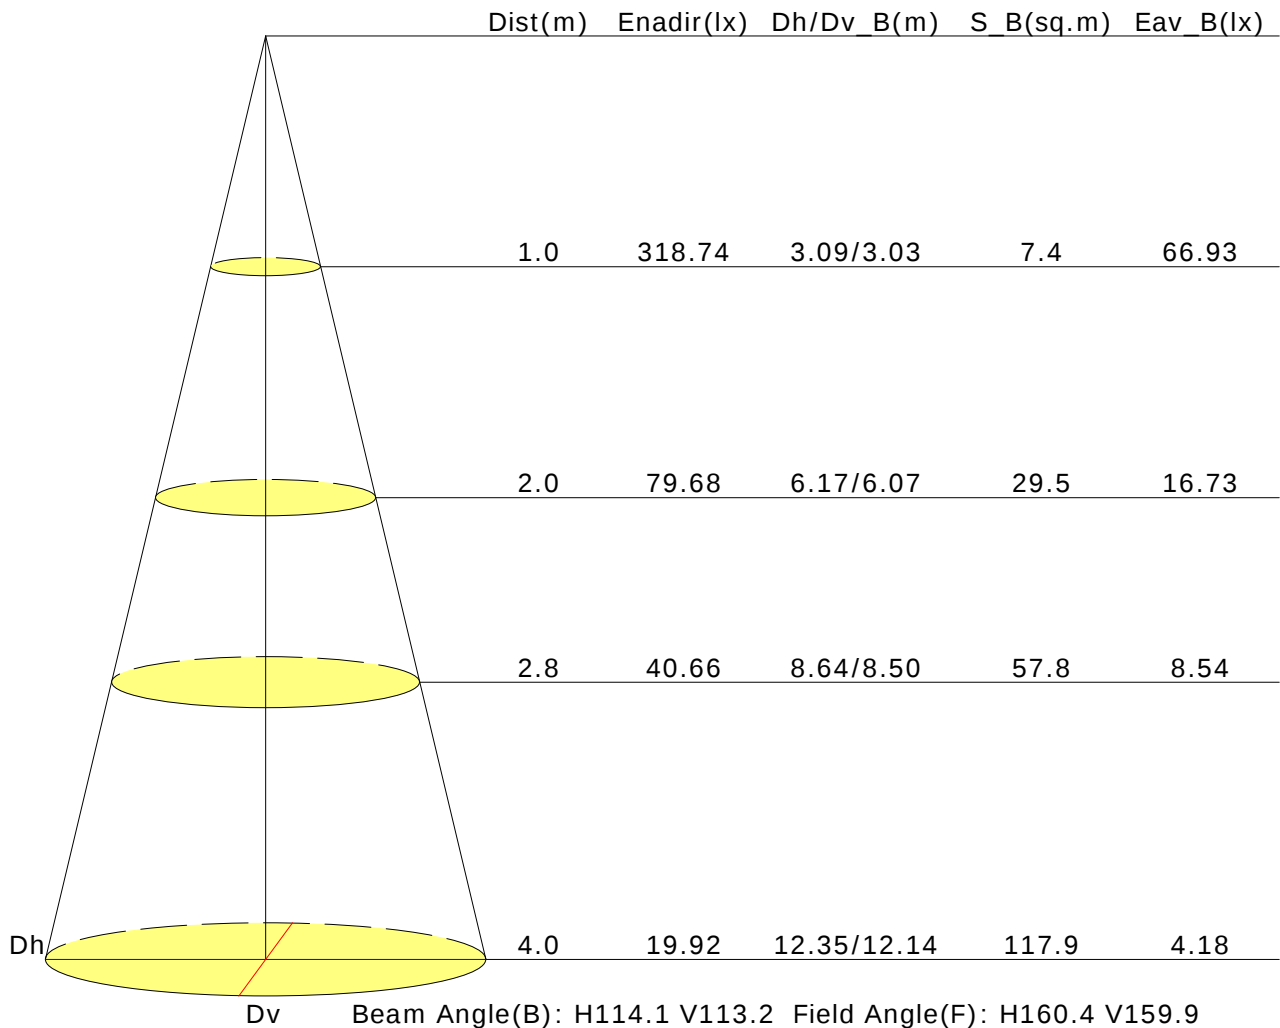

Vertical IsoLux Plot

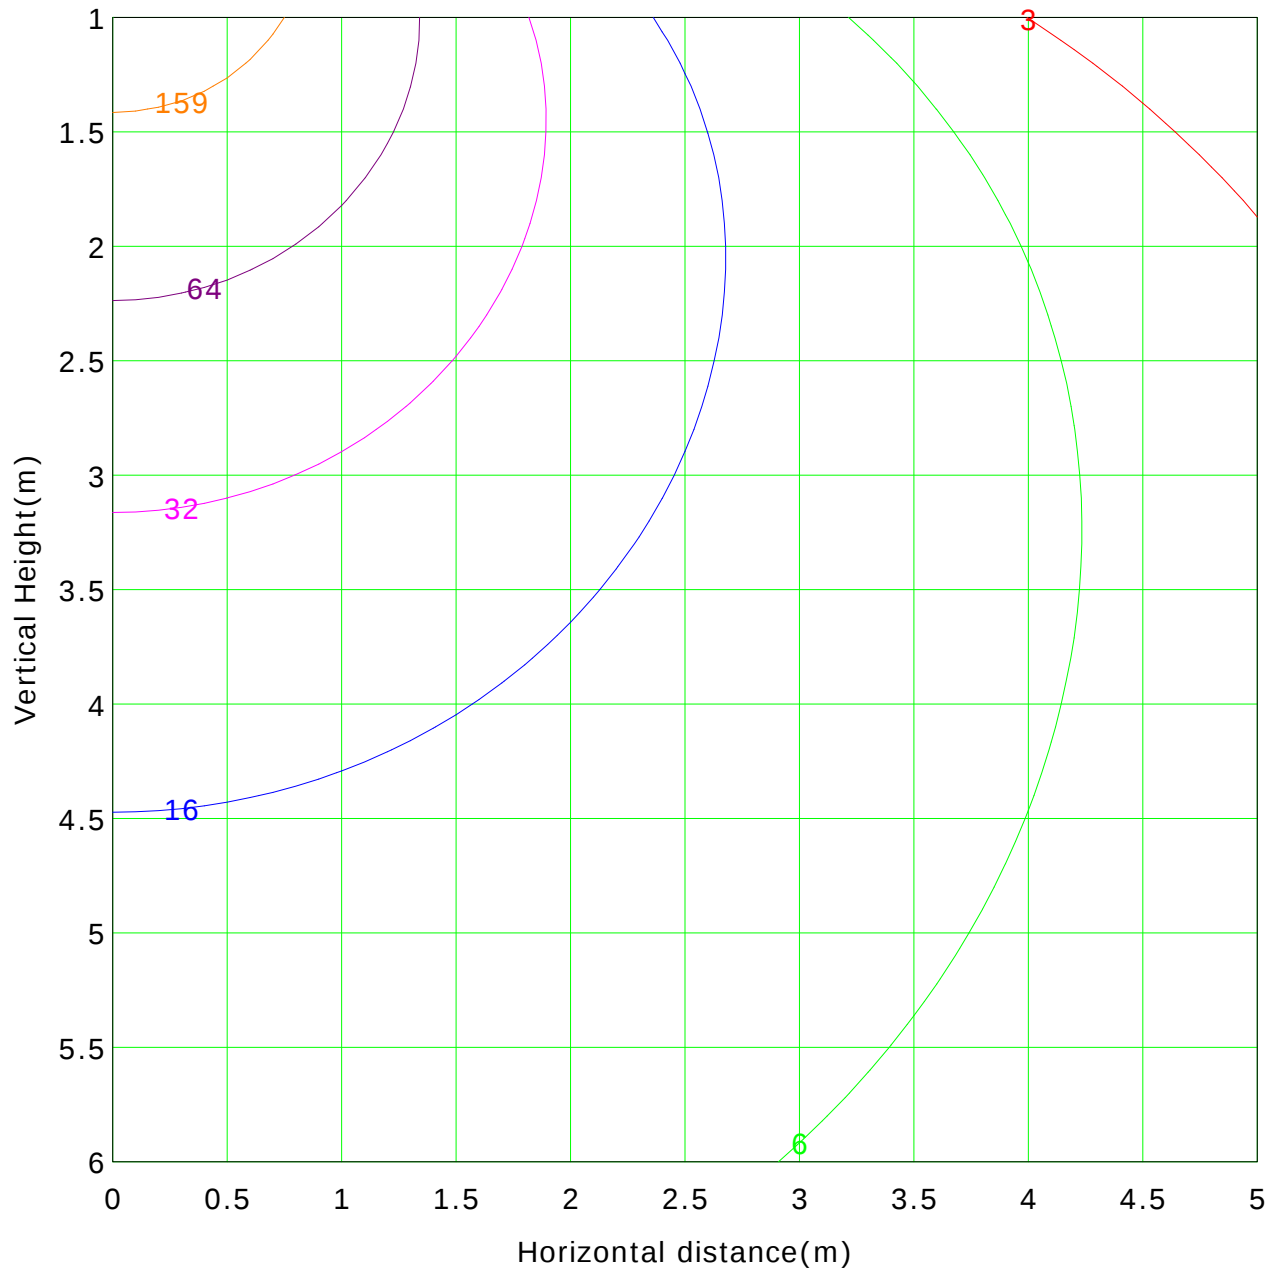

Lowest(m): 1.0m	Highest(m): 6.0m	Max Lux: 318.7 lx
(1%): 3.2 lx	(2%): 6.4 lx	
(5%): 15.9 lx	(10%): 31.9 lx	
(20%): 63.7 lx	(50%): 159.4 lx	
(100%): 318.7 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector: