

Report No.:

Test Time: 02/08/2018 12:55

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-SL02-06 + LLD-06-FM

Lamp Description: F52-400-60822

Number of Lamps: 1

Lumens per Lamp: 1579 lm

Voltage: 24.0 V

Current: 0.592 A

Power: 14.19 W

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 922.7 lm

Downward Ratio: 58.23%

Total Rated Lamp Lumens: 1579.0 lm

Efficiency: 58.44%

Upward Ratio: 0.20%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 160.4, 159.9, 160.1, 160.2

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 114.1, 113.2, 113.7, 113.7

Luminaire Efficacy Rating (LER): 65.08

Central Intensity: 318.74 cd


Max. Intensity: 321.84 cd

Pos of Max. Intensity: H300 V1


S/MH(C0/C180): 1.27

S/MH(C90/C270): 1.26

Picture Of Luminaire

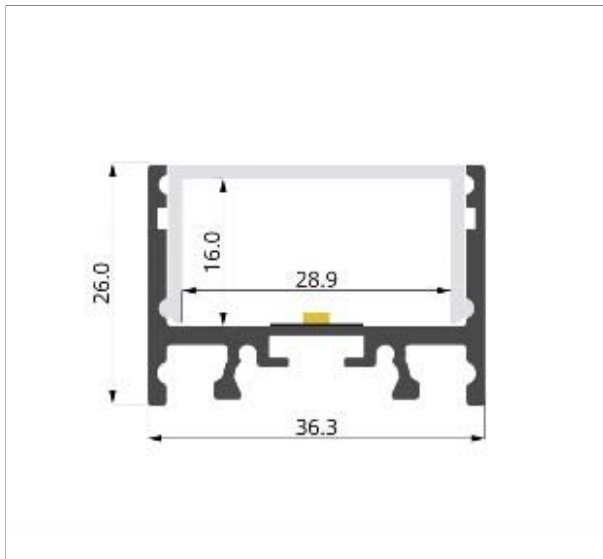

Luminous Intensity Distribution Curve

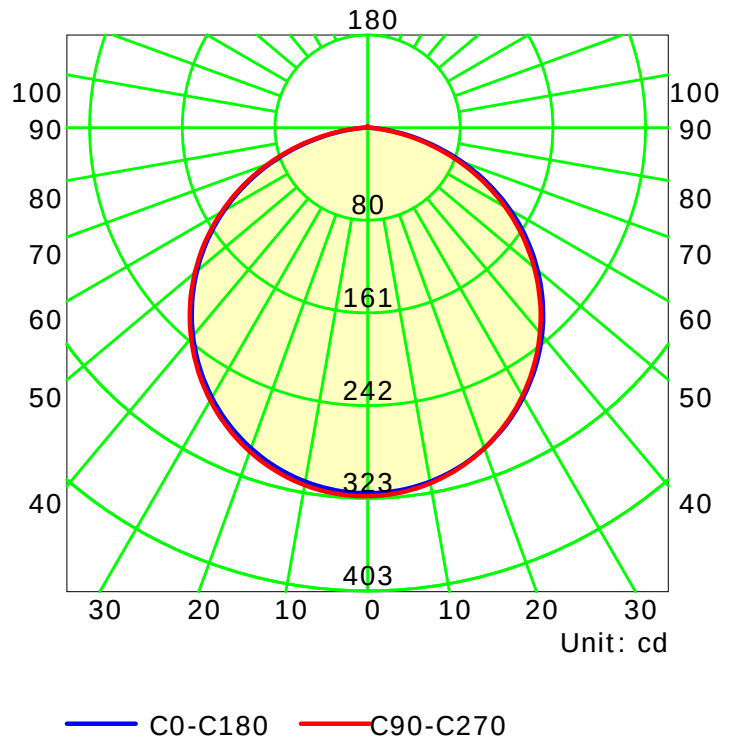

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

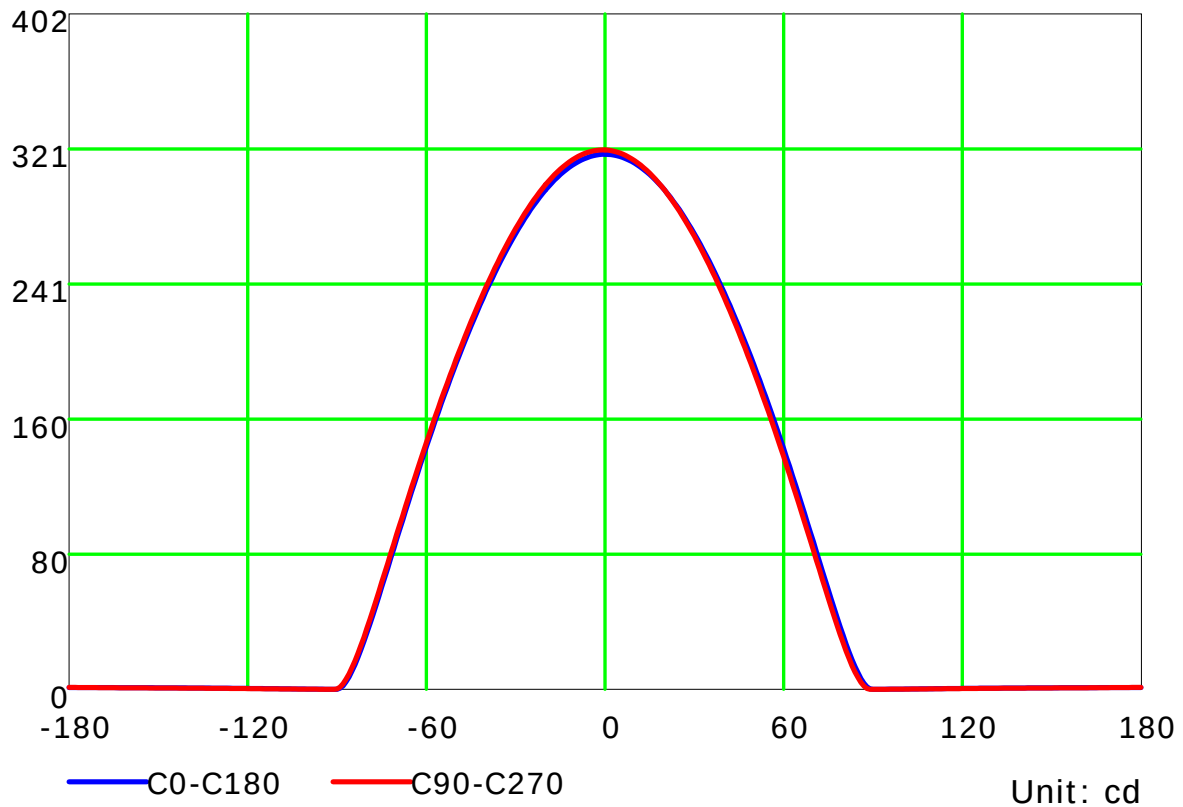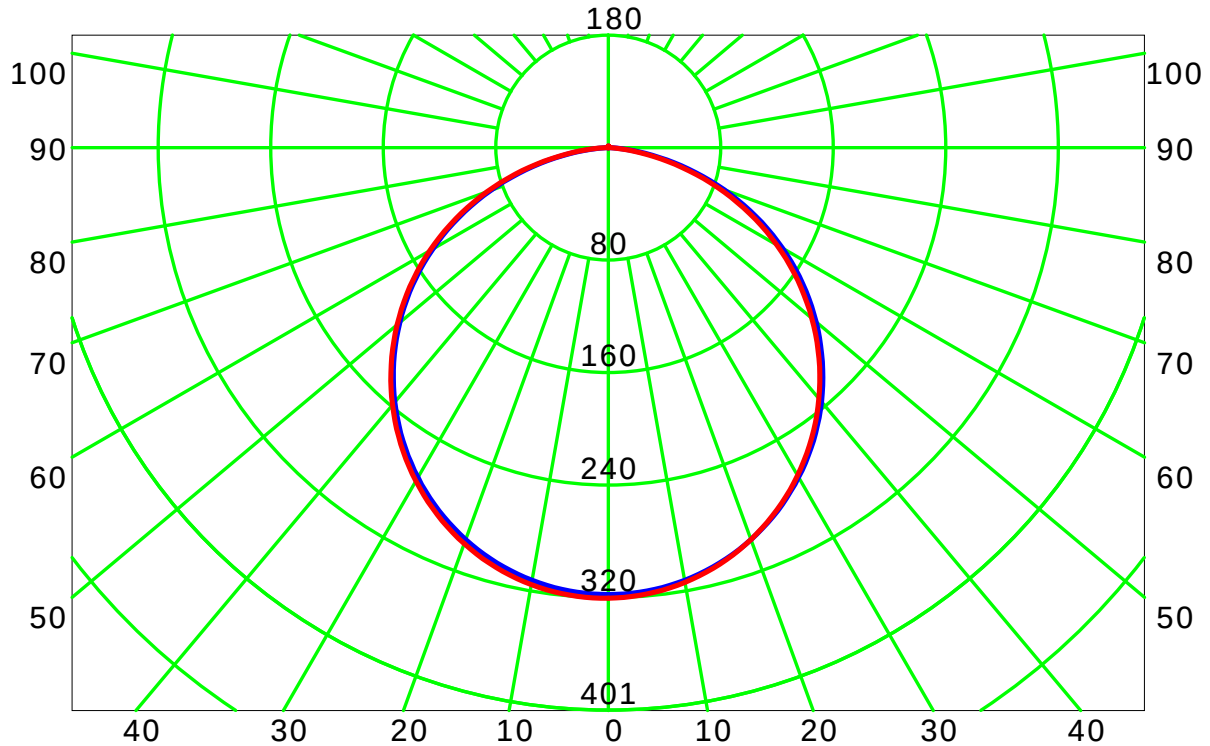

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-2000
Distance: 7.970 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd / klm)

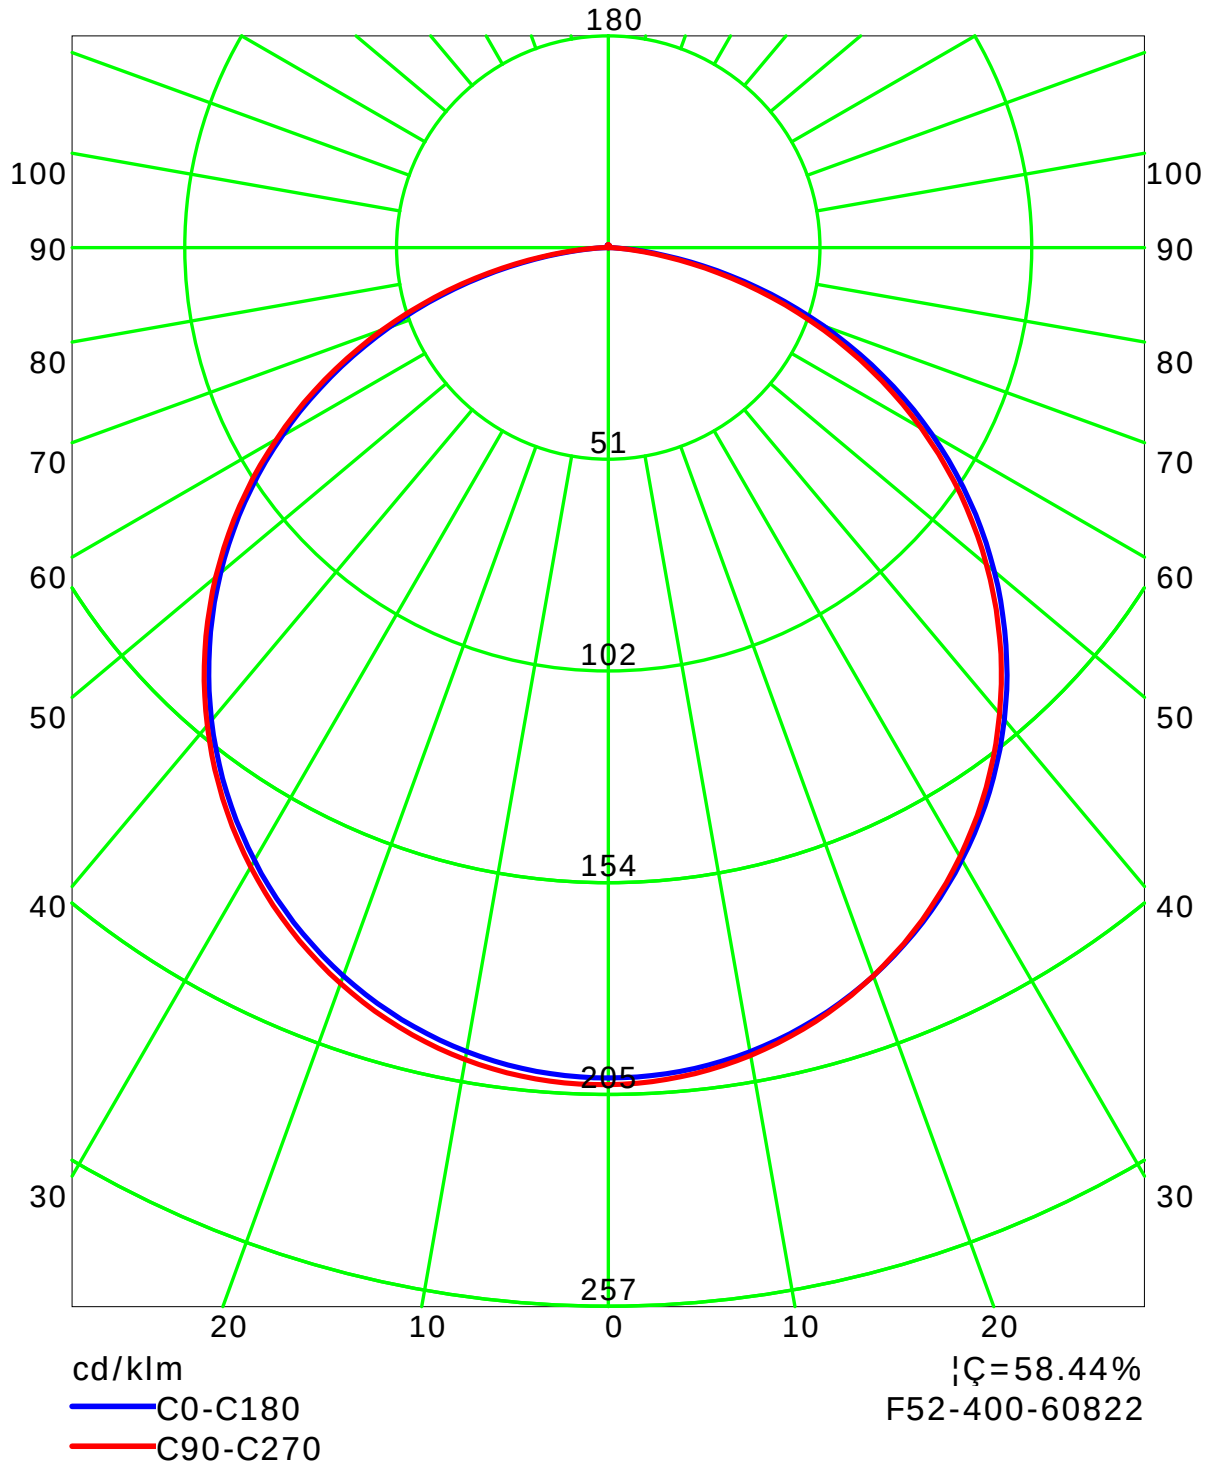

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-2000
Distance: 7.970 m
Humidity:
Inspector:

Isocandela (rectangle)

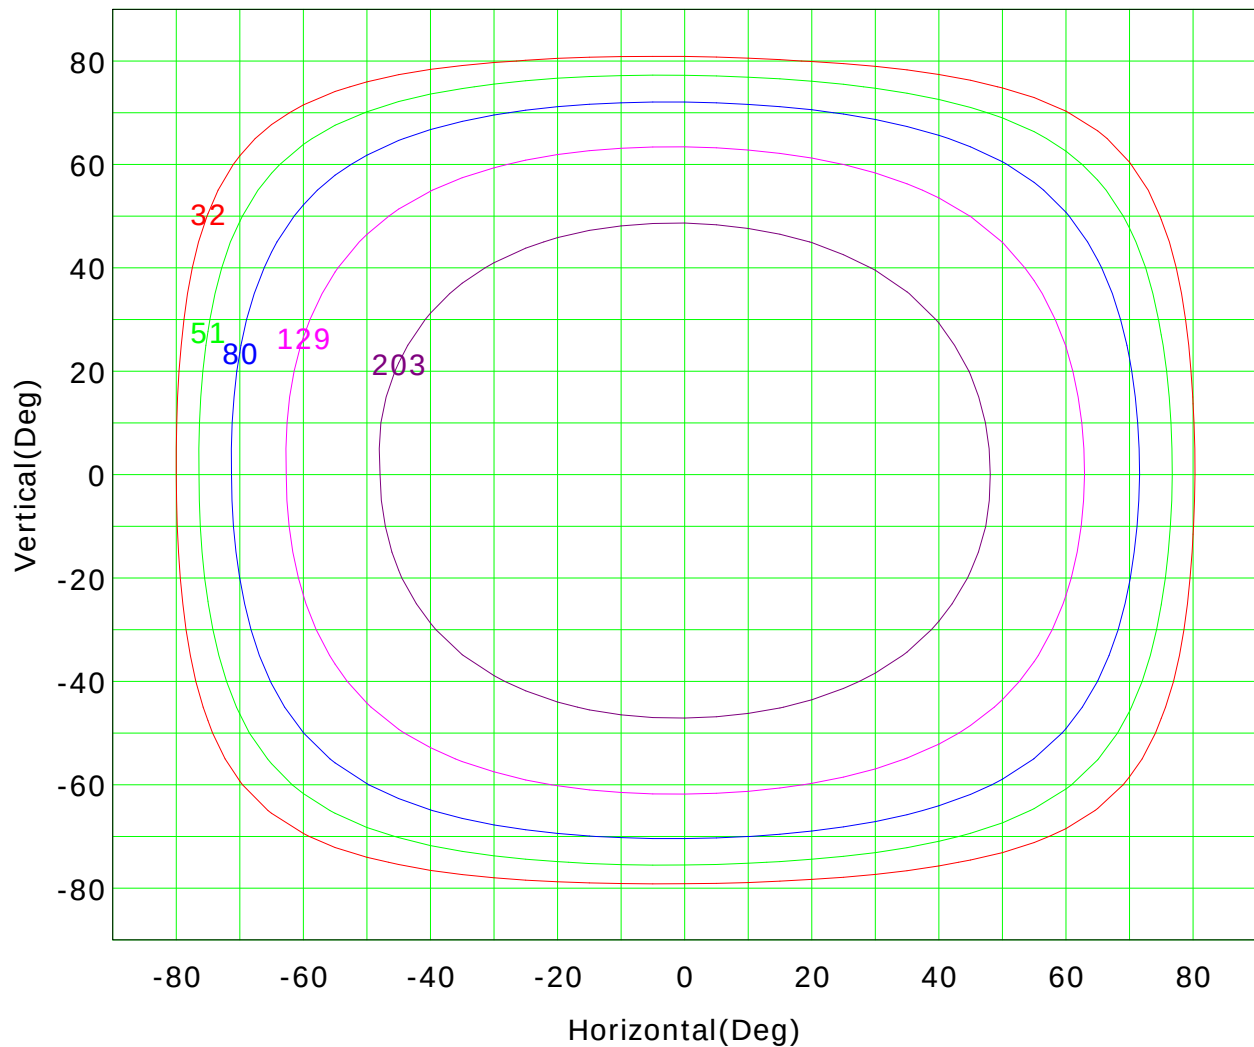

I_{max} (100%): 322 cd

(10%):	32 cd	(16%):	51 cd
(25%):	80 cd	(40%):	129 cd
(63%):	203 cd	(100%):	322 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Isocandela (sphere)

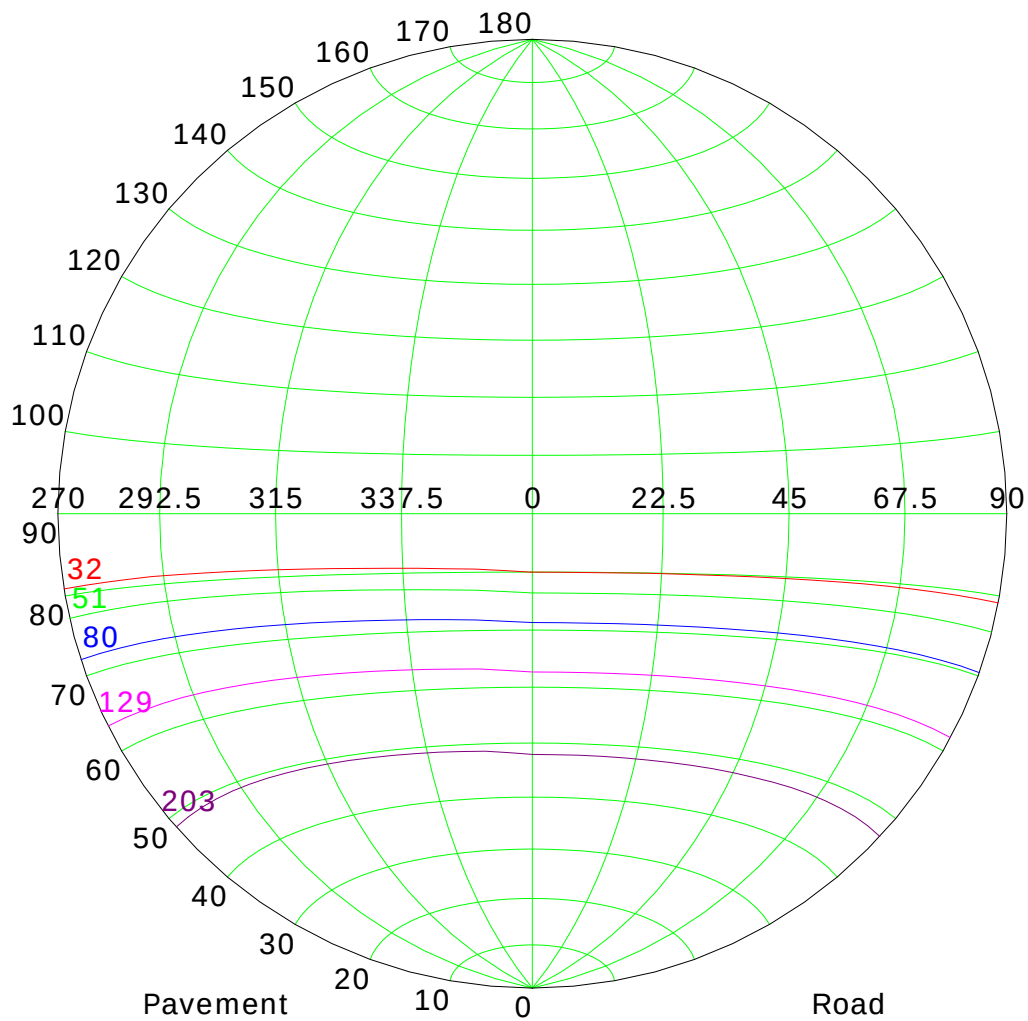

I_{max} (100%): 322 cd

— (10%):	32 cd	— (16%):	51 cd
— (25%):	80 cd	— (40%):	129 cd
— (63%):	203 cd	— (100%):	322 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

IsoLux Plot

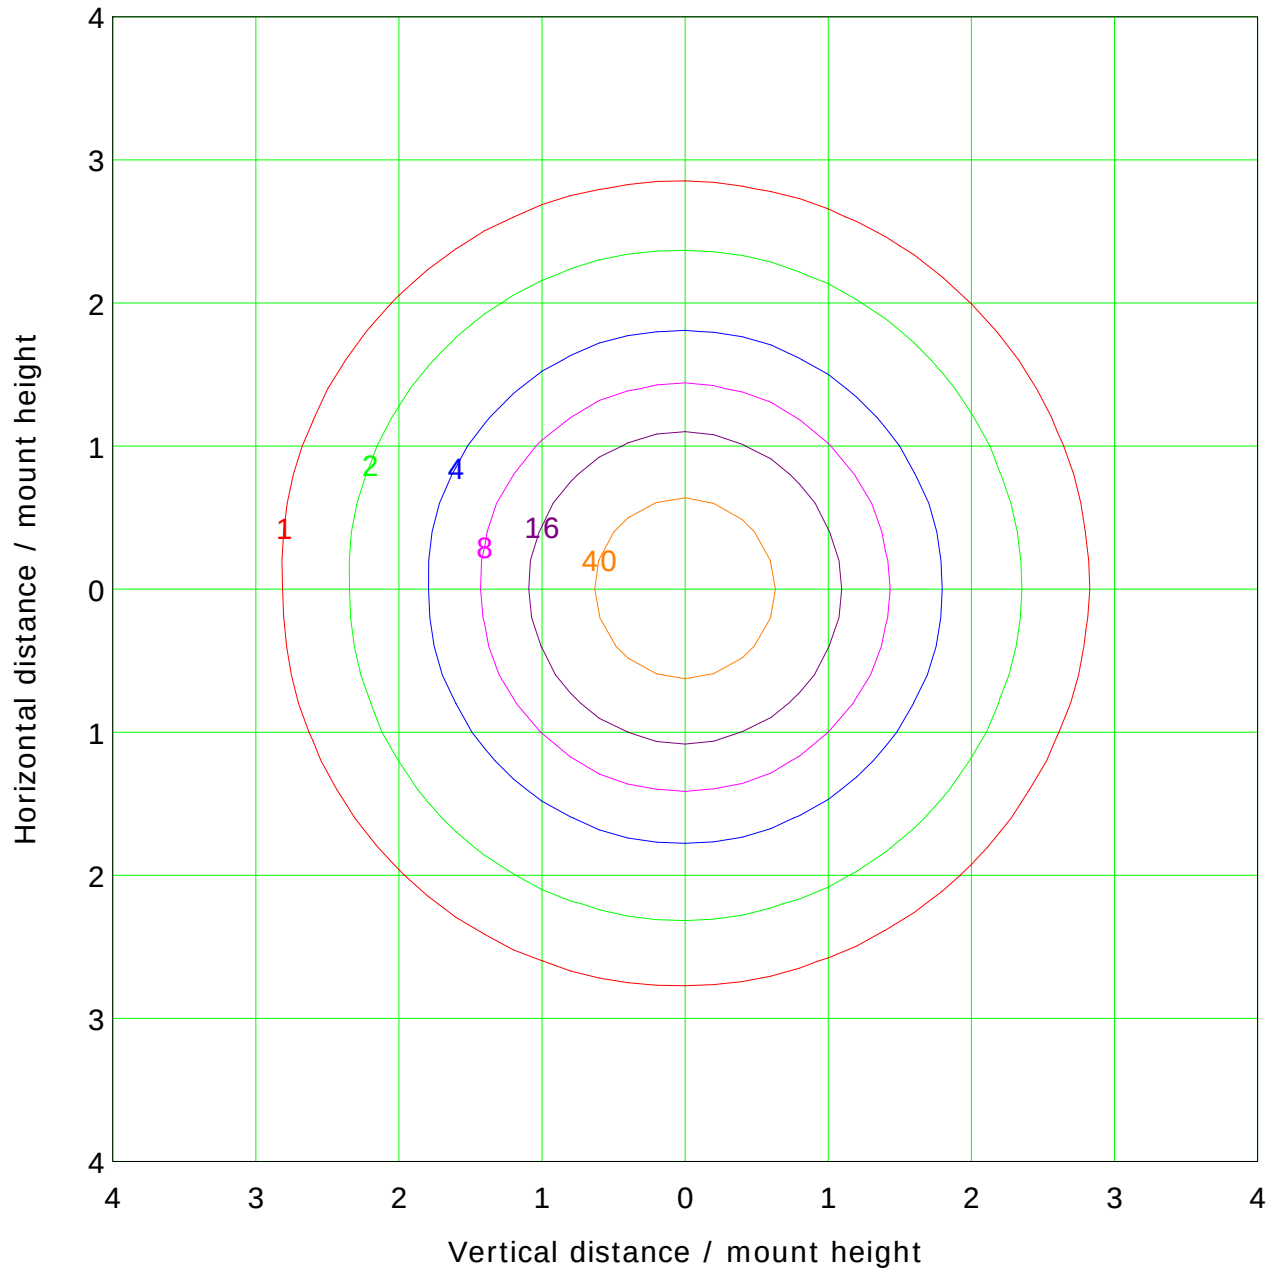

Mounting Height: 2.0m		Max Lux(100%): 80.5 lx	
— (1%):	0.8 lx	— (2%):	1.6 lx
— (5%):	4.0 lx	— (10%):	8.0 lx
— (20%):	16.1 lx	— (50%):	40.2 lx
— (100%):	80.5 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

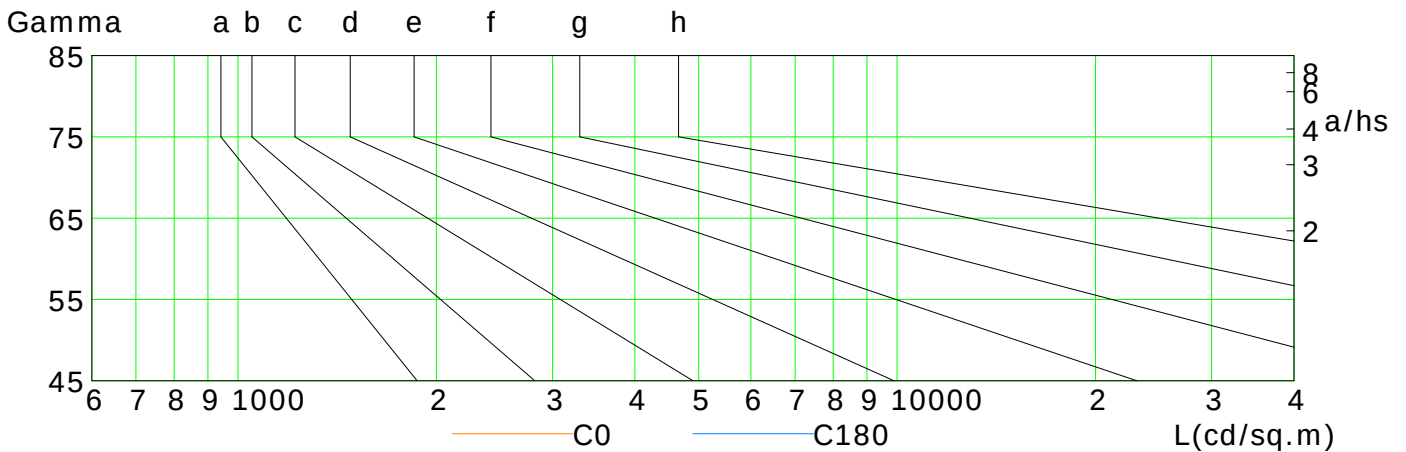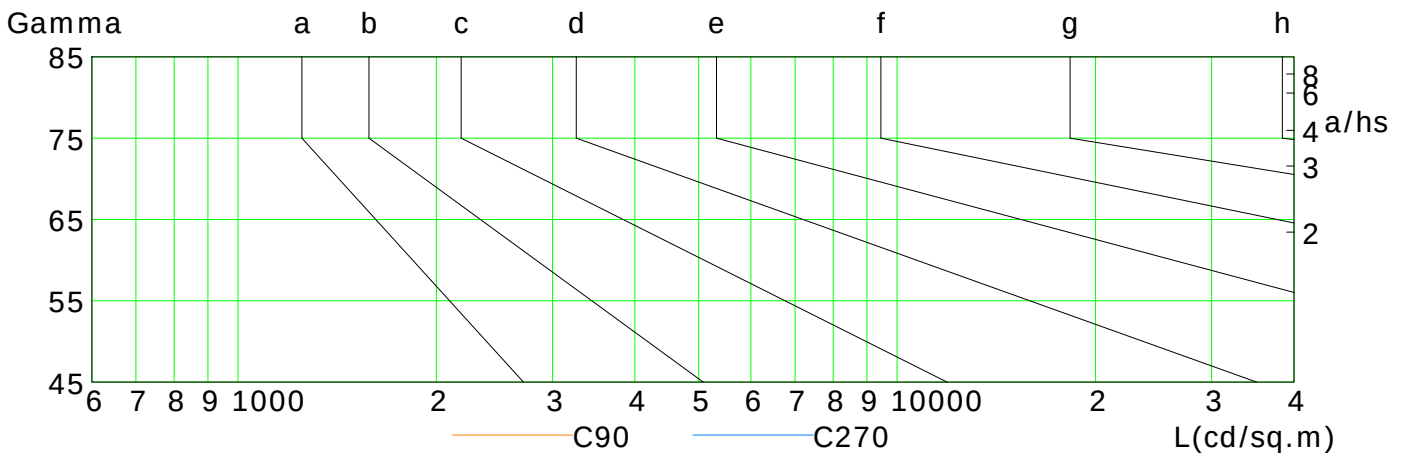

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	216	193	169	143	116	88	59	32	10
C90	212	189	165	139	111	83	54	28	7
C180	216	194	170	145	118	90	61	34	11
C270	219	197	173	147	120	92	64	36	13

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m


Humidity:

Inspector:

Illuminance at a Distance

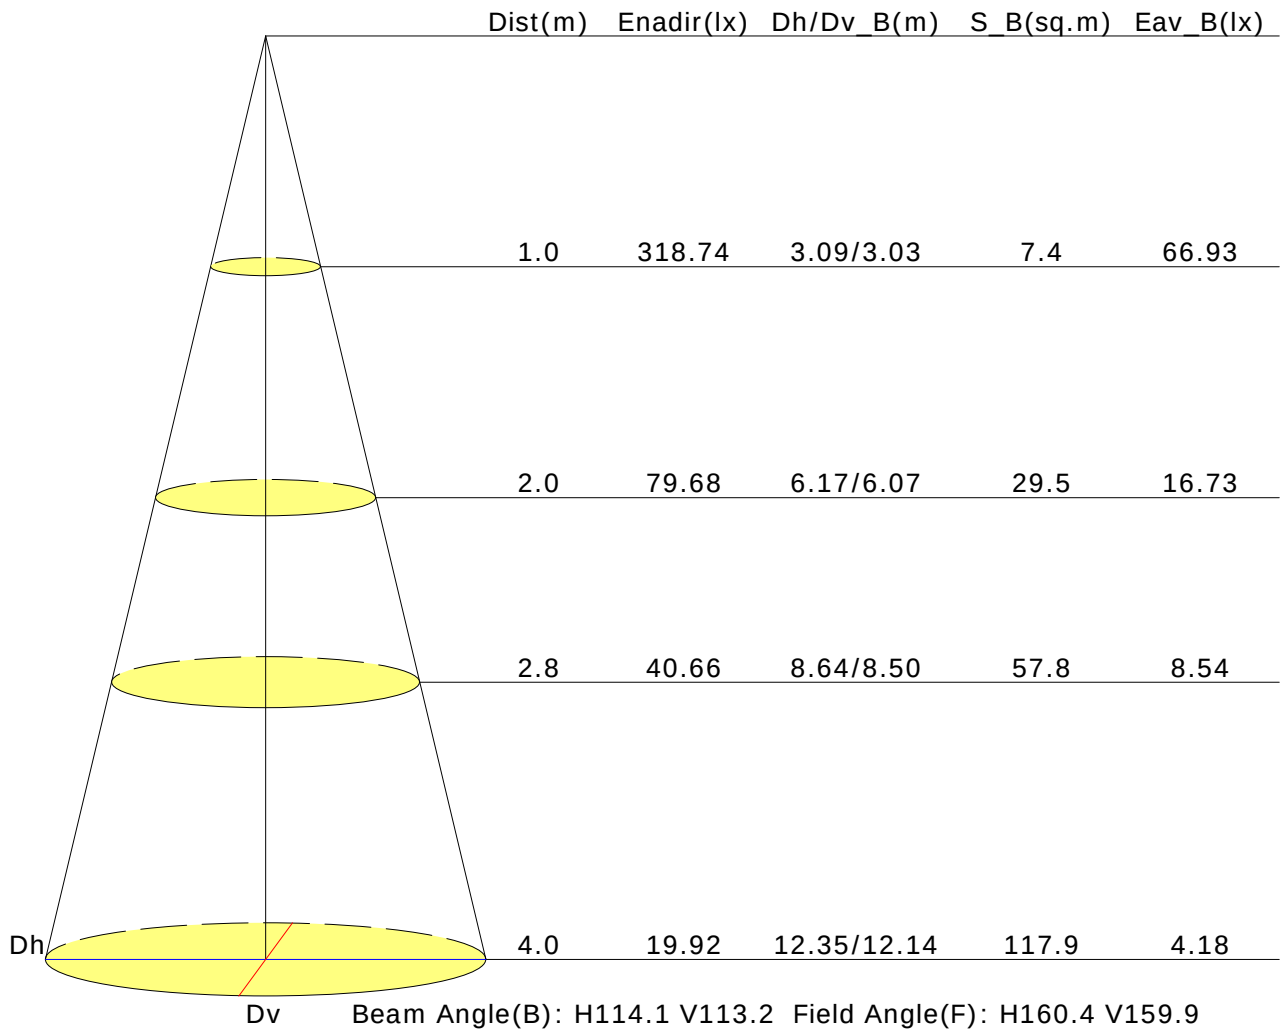

Vertical IsoLux Plot

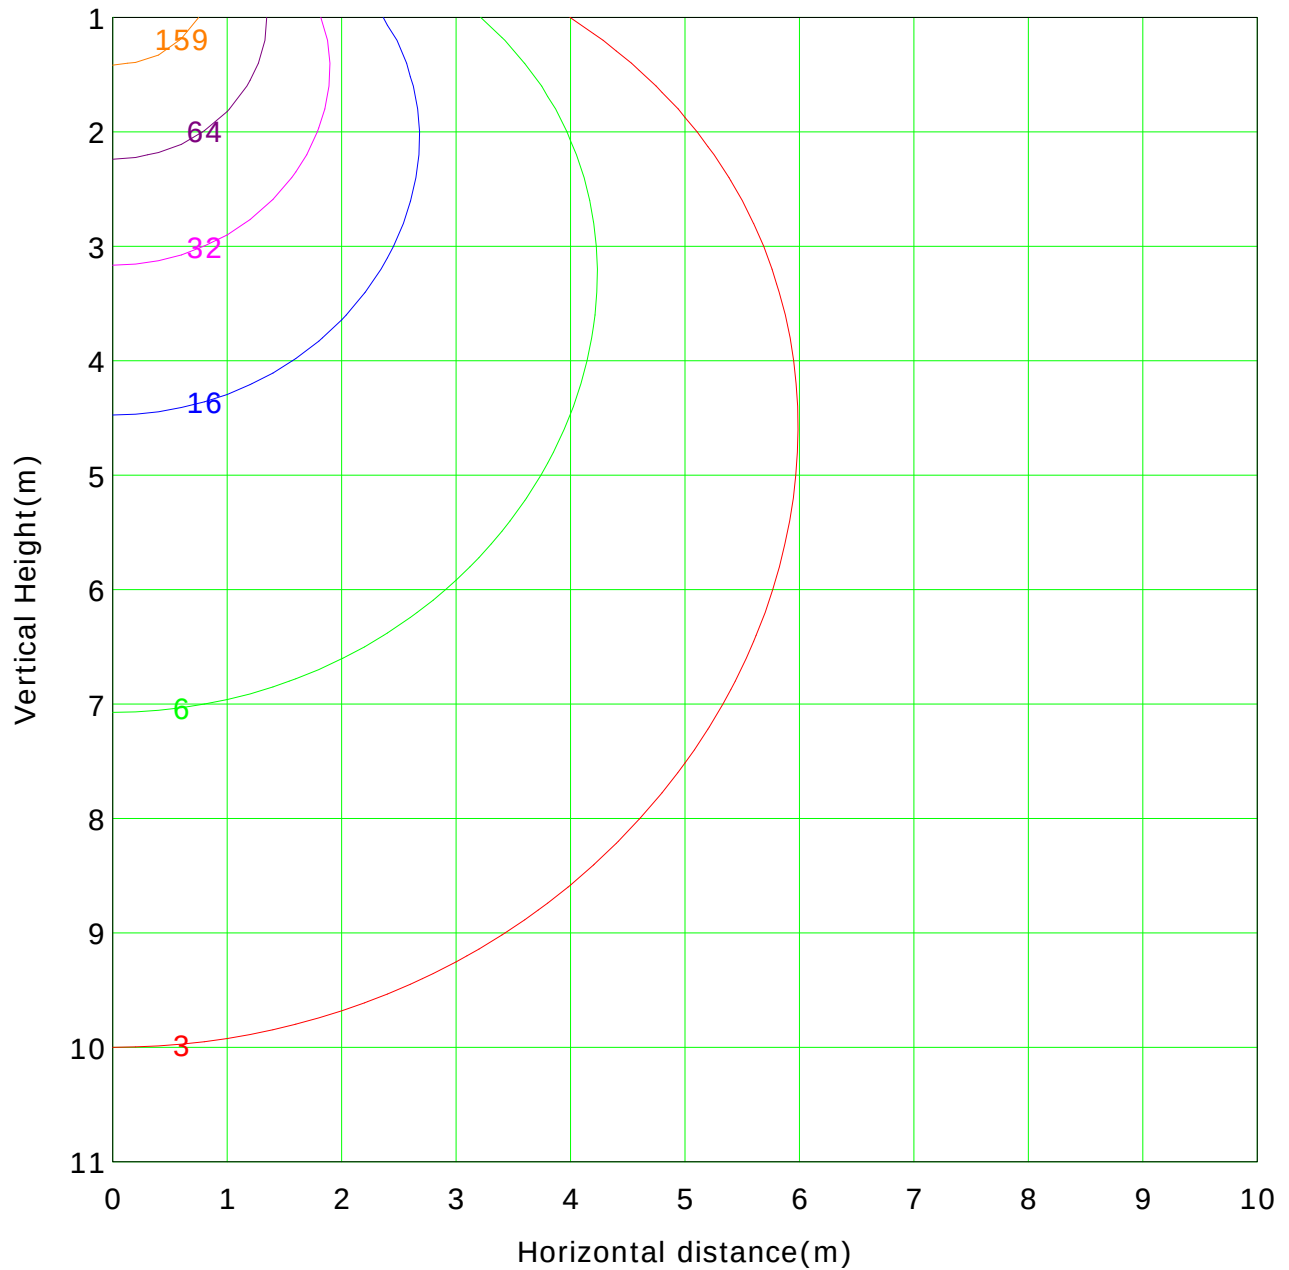

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 318.7 lx

(1%): 3.2 lx	(2%): 6.4 lx
(5%): 15.9 lx	(10%): 31.9 lx
(20%): 63.7 lx	(50%): 159.4 lx
(100%): 318.7 lx	

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Report No.:

Test Time: 02/08/2018 16:42

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-SL02-06 + LLD-06-CM

Lamp Description: F52-400-60822

Number of Lamps: 1

Lumens per Lamp: 1579 lm

Voltage: 24.0 V

Current: 0.595 A

Power: 14.29 W

Power Factor: 1.000

Photometric Results

CIE Class: Semi-Direct

Measurement Flux: 985.2 lm

Downward Ratio: 55.71%

Total Rated Lamp Lumens: 1579.0 lm

Efficiency: 62.39%

Upward Ratio: 6.68%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 238.4, 173.7, 164.9, 253.4

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 130.5, 122.5, 117.0, 132.8

Luminaire Efficacy Rating (LER): 68.99

Central Intensity: 259.03 cd


Max. Intensity: 259.45 cd

Pos of Max. Intensity: H330 V4


S/MH(C0/C180): 1.36

S/MH(C90/C270): 1.31

Picture Of Luminaire

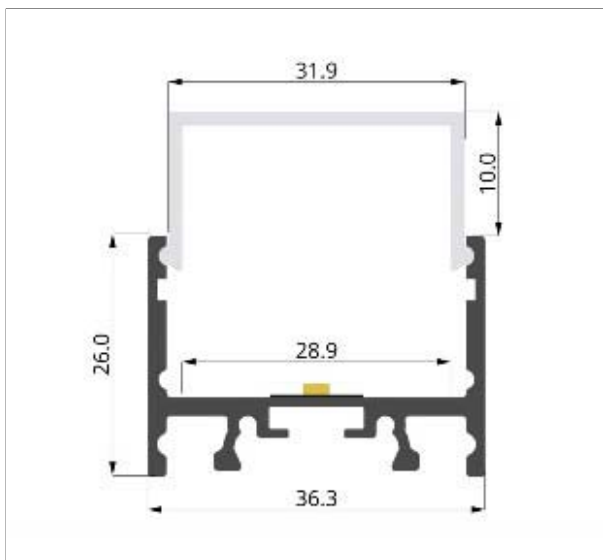

Luminous Intensity Distribution Curve

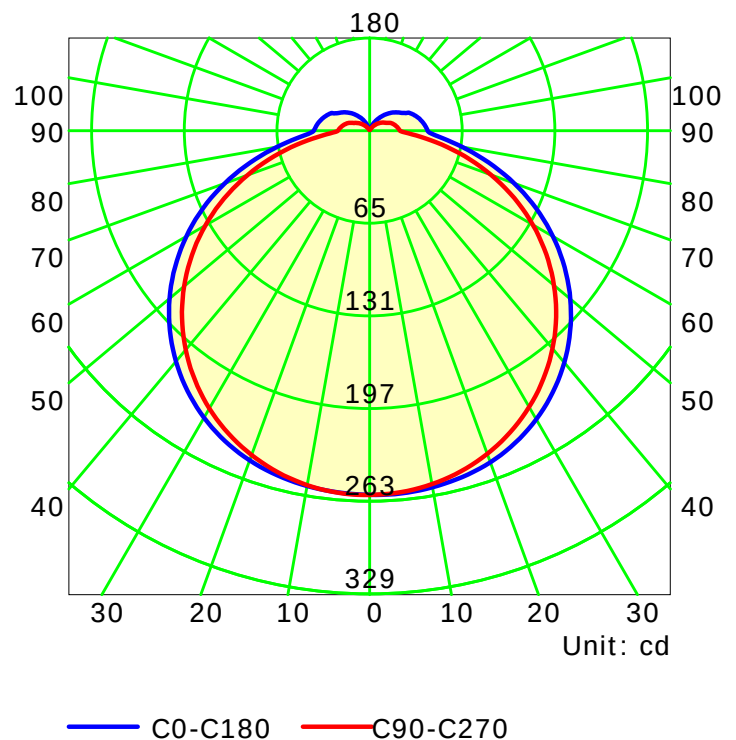

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

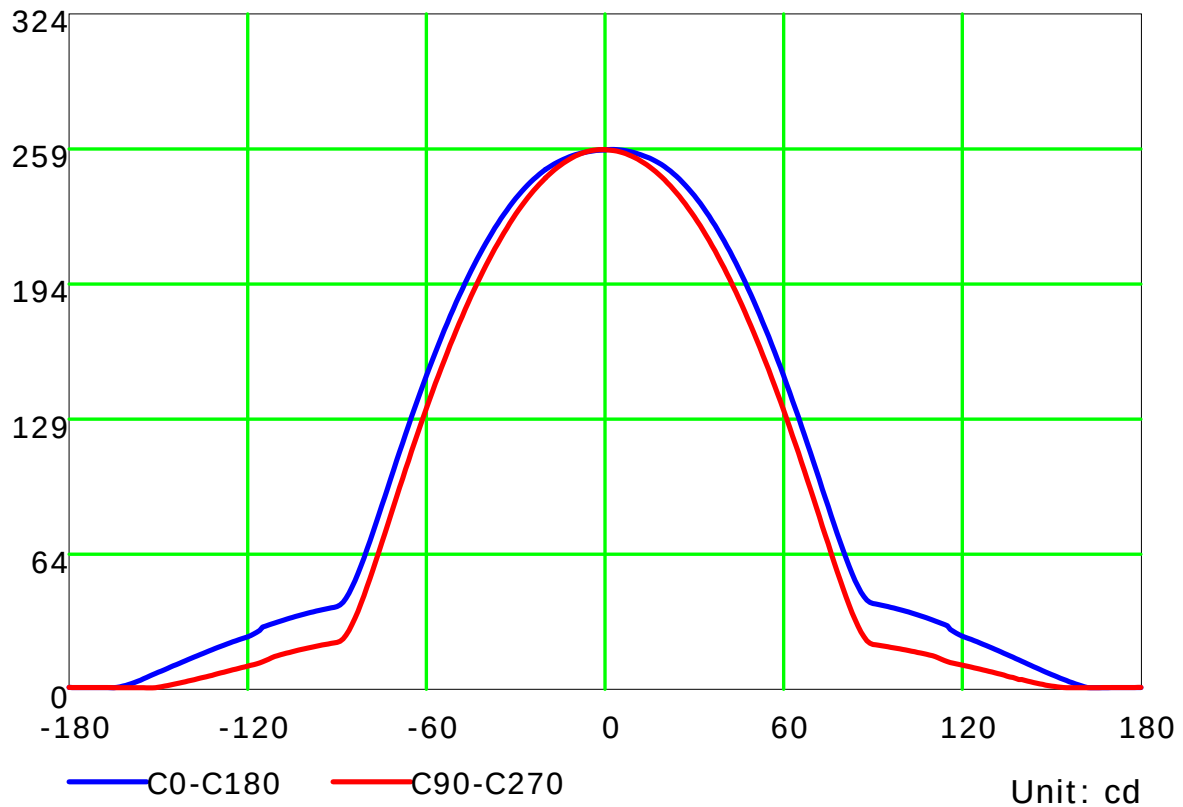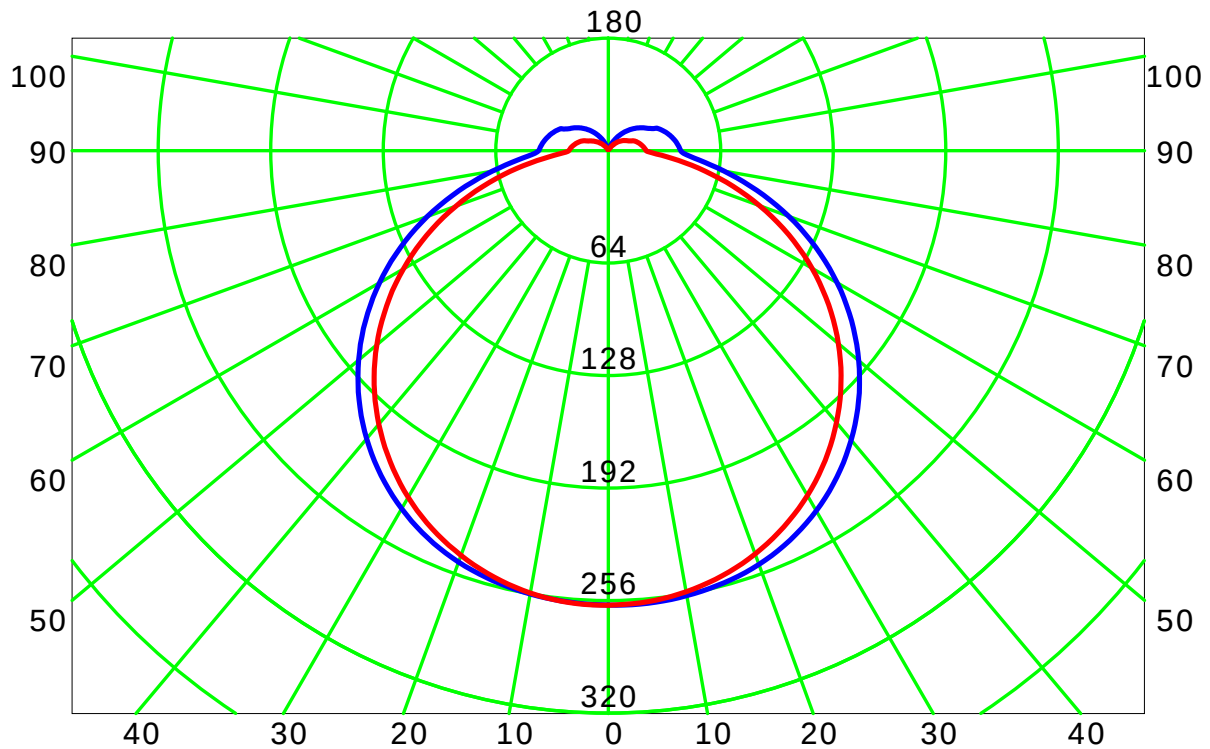

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-2000
Distance: 7.970 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd / klm)

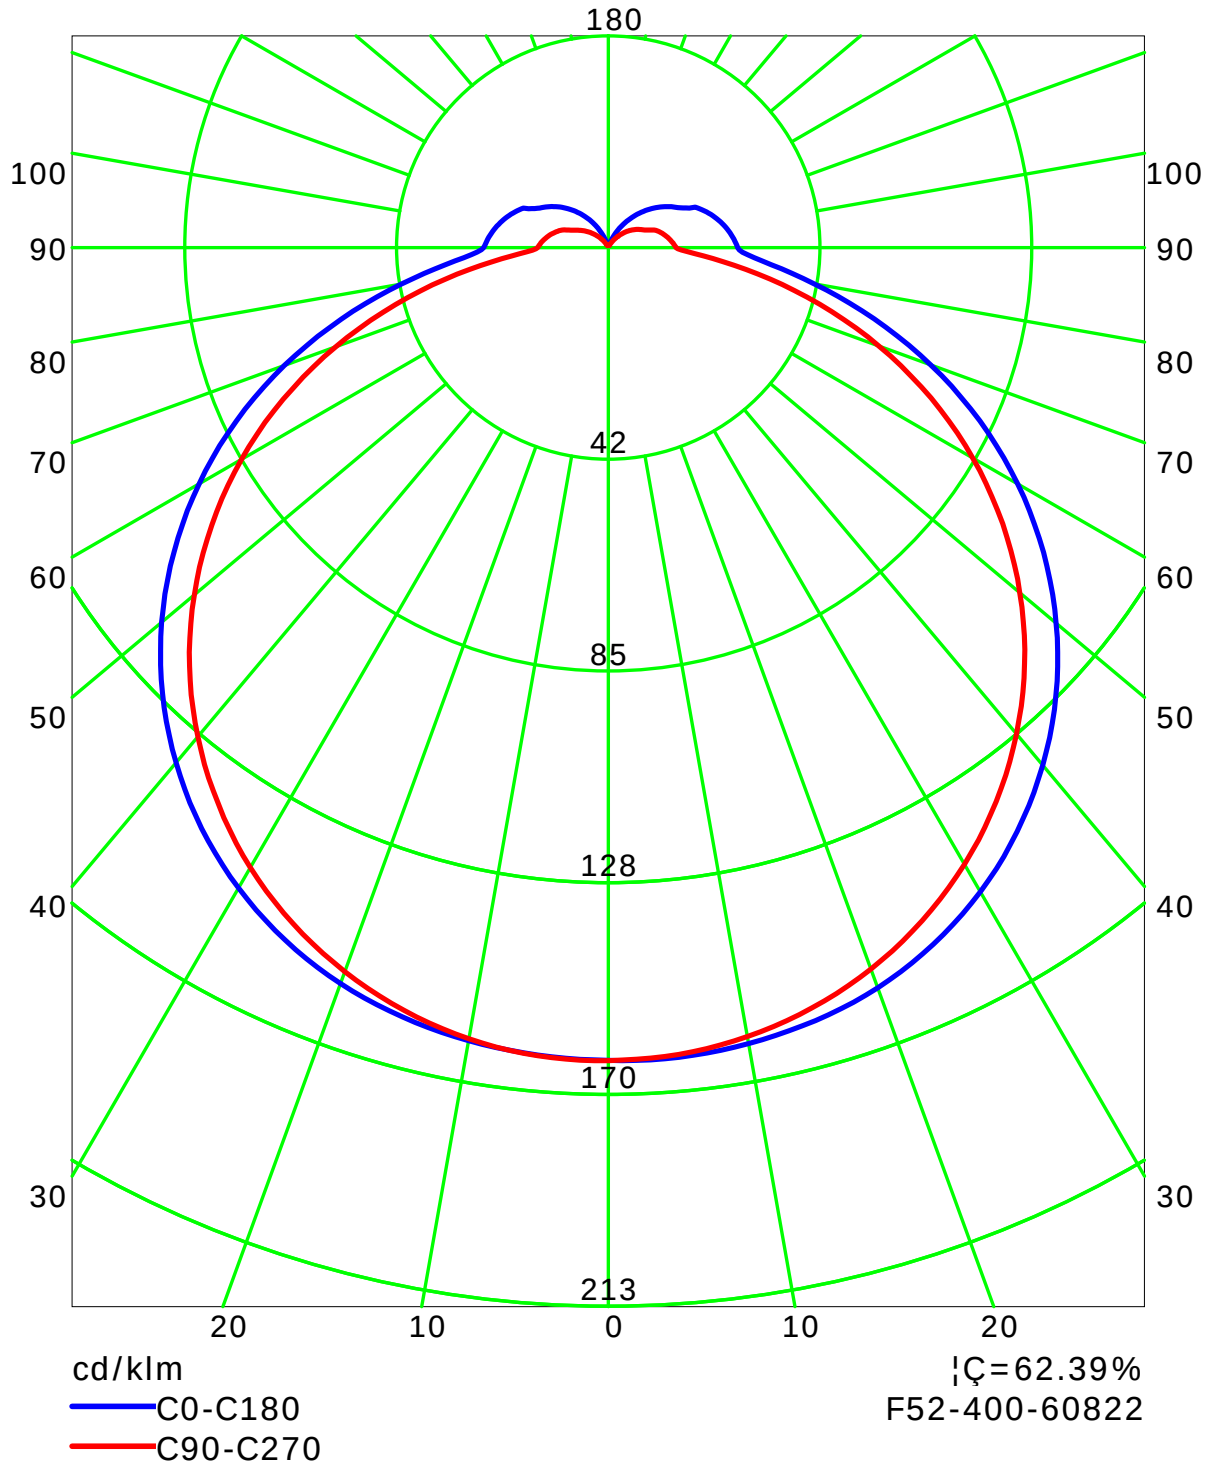

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-2000
Distance: 7.970 m
Humidity:
Inspector:

Isocandela (rectangle)

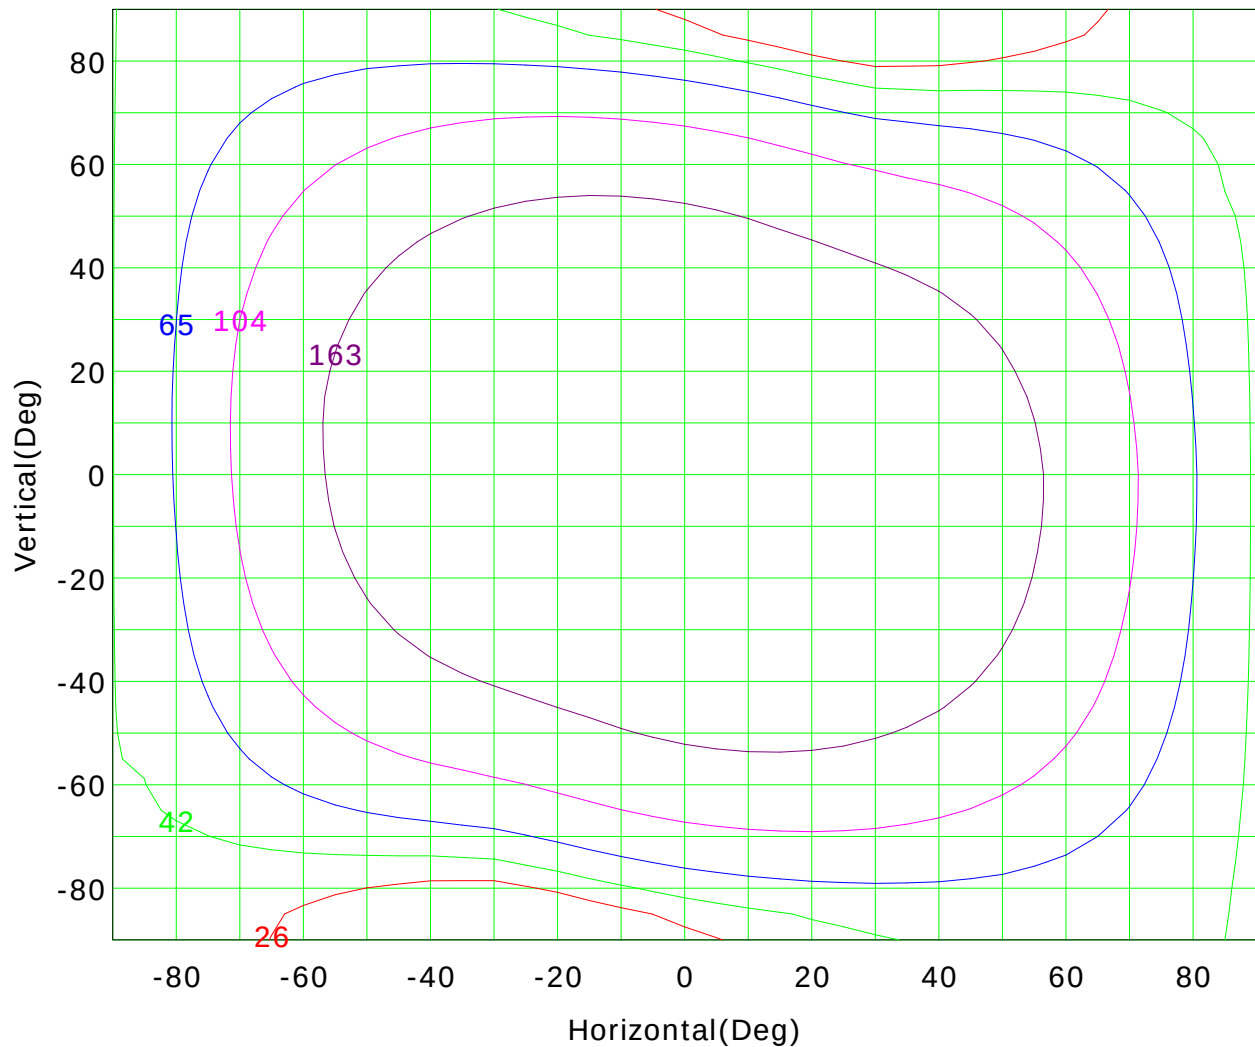

I_{max} (100%): 259 cd

(10%):	26 cd	(16%):	42 cd
(25%):	65 cd	(40%):	104 cd
(63%):	163 cd	(100%):	259 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Isocandela (sphere)

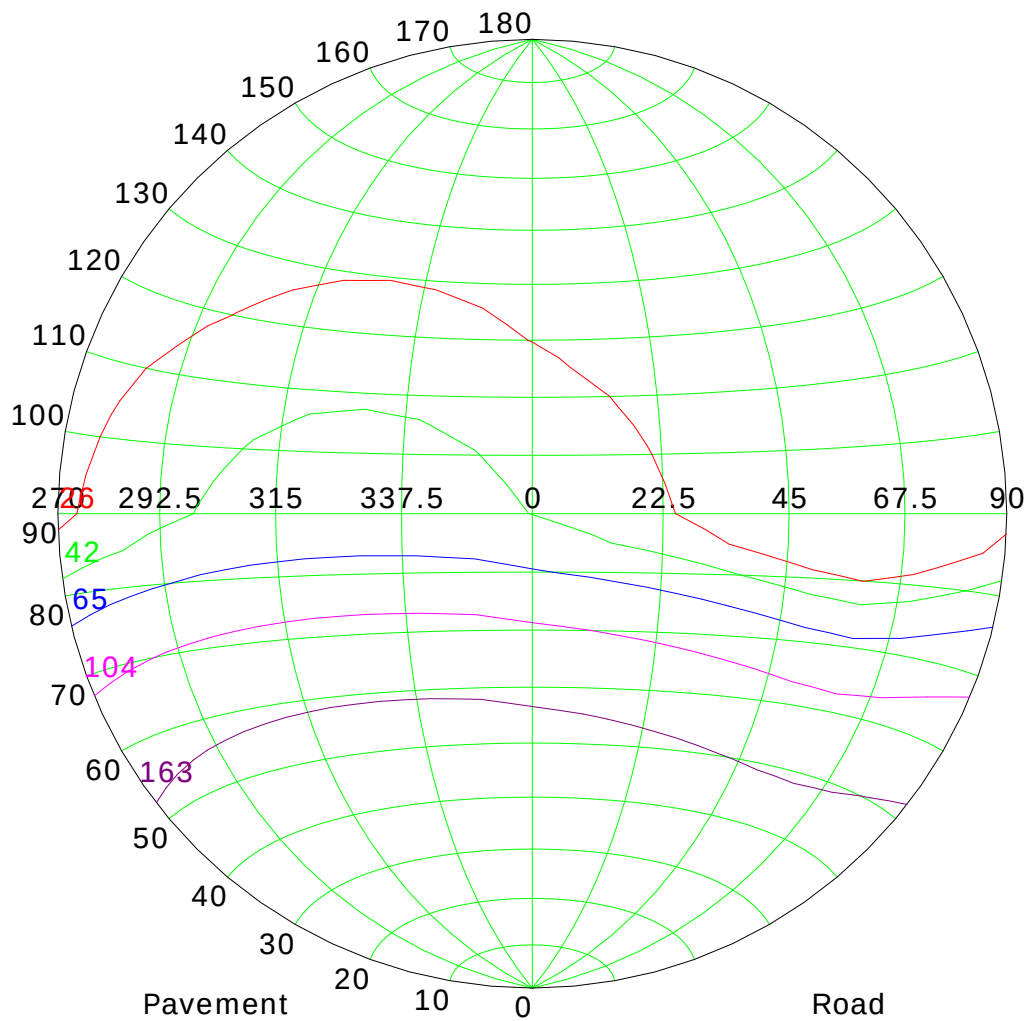

Imax (100%): 259 cd

(10%):	26 cd	(16%):	42 cd
(25%):	65 cd	(40%):	104 cd
(63%):	163 cd	(100%):	259 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

IsoLux Plot

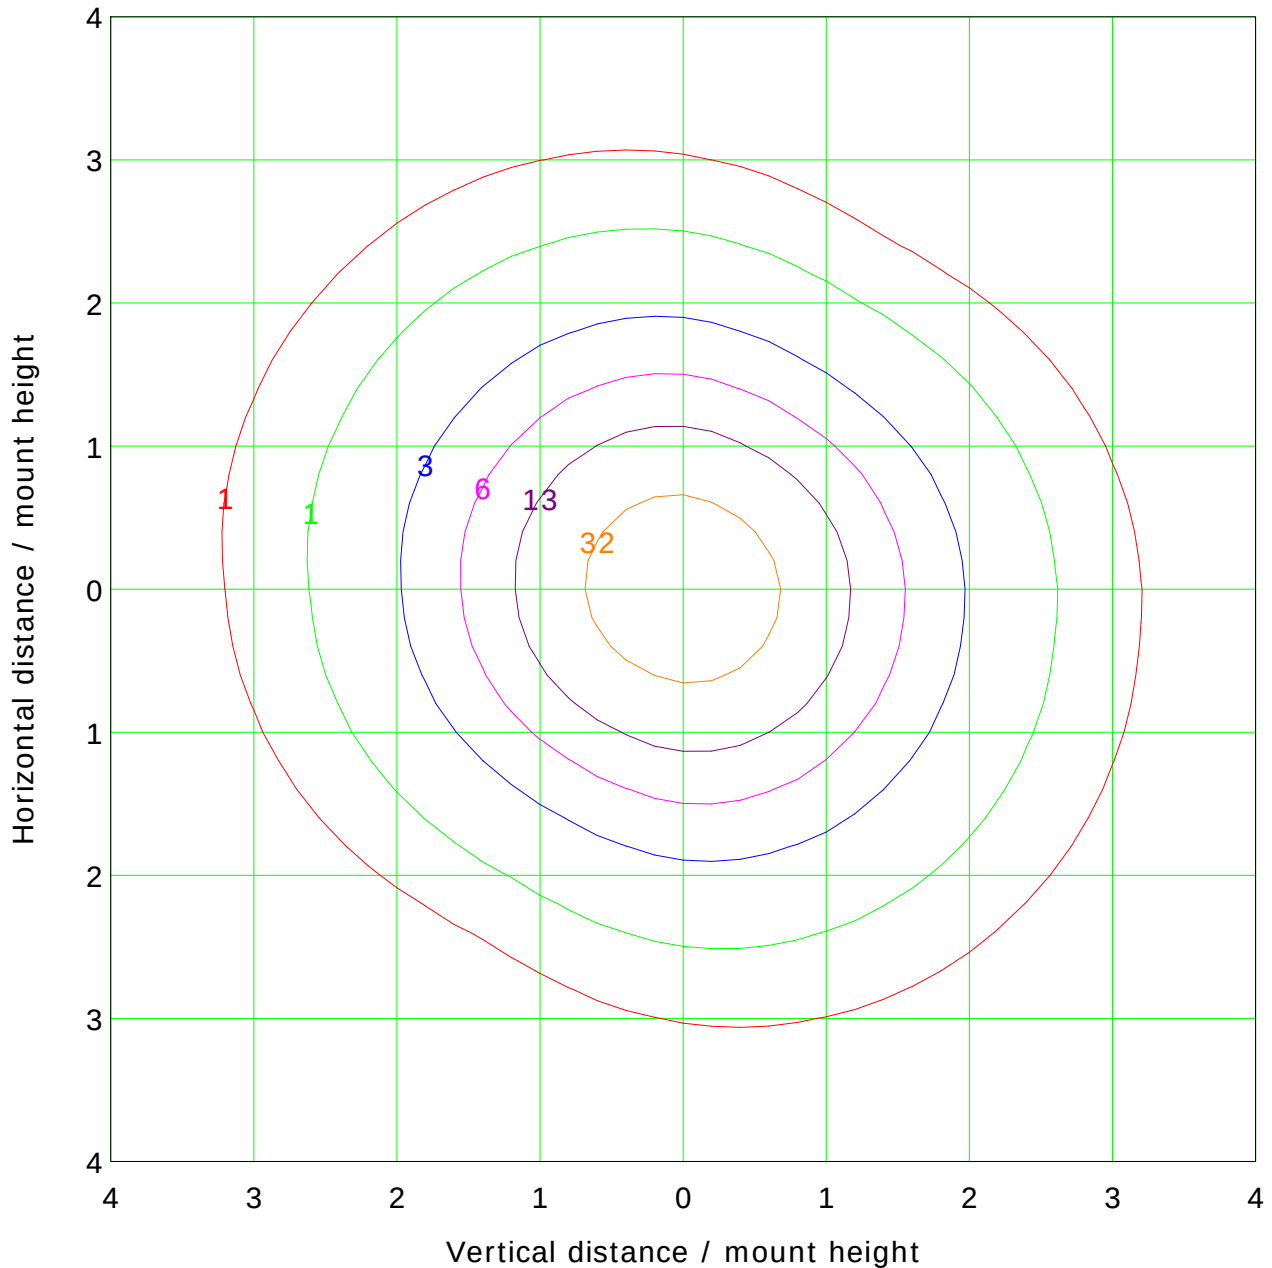

Mounting Height: 2.0m		Max Lux(100%): 64.8 lx	
— (1%):	0.6 lx	— (2%):	1.3 lx
— (5%):	3.2 lx	— (10%):	6.5 lx
— (20%):	13.0 lx	— (50%):	32.4 lx
— (100%):	64.8 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

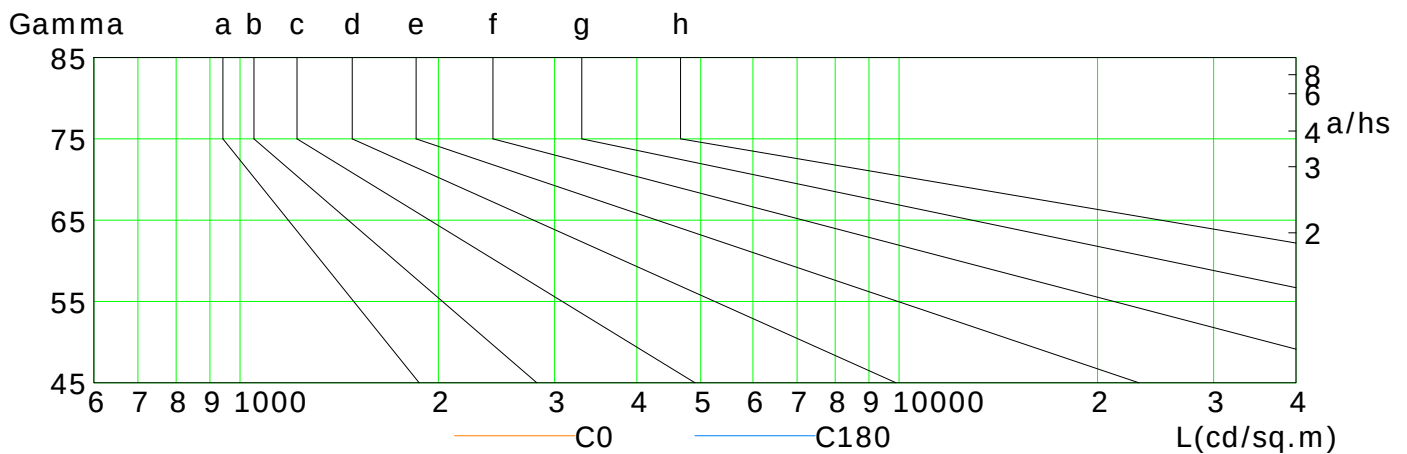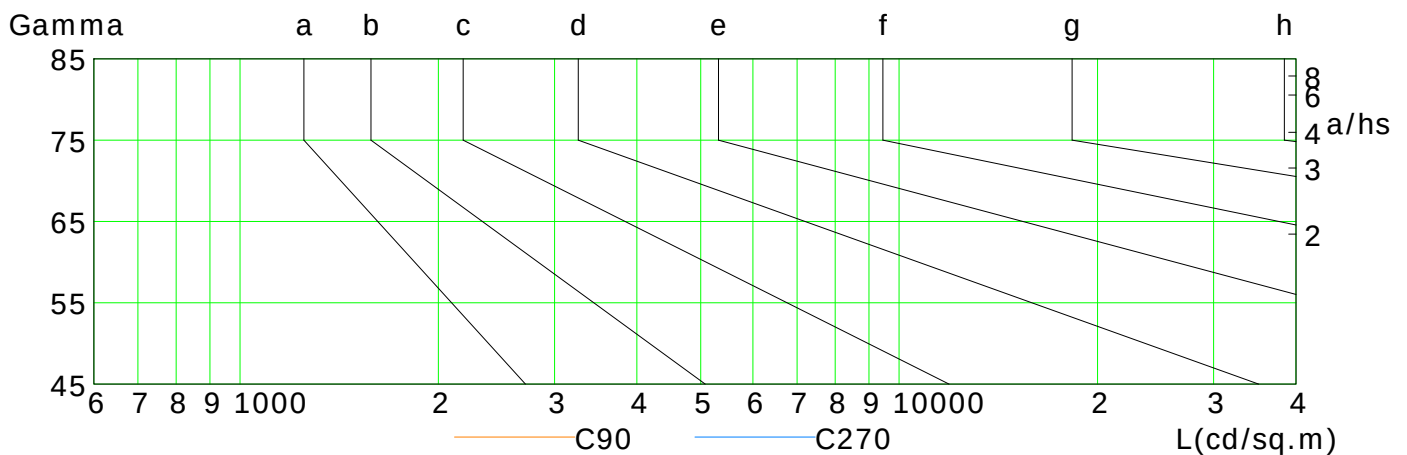

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	202	186	169	151	131	109	88	67	49
C90	188	171	153	134	114	92	70	48	30
C180	201	186	169	151	131	110	88	67	49
C270	189	172	154	135	114	92	70	49	31

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-2000

Distance: 7.970 m


Humidity:

Inspector:

Illuminance at a Distance

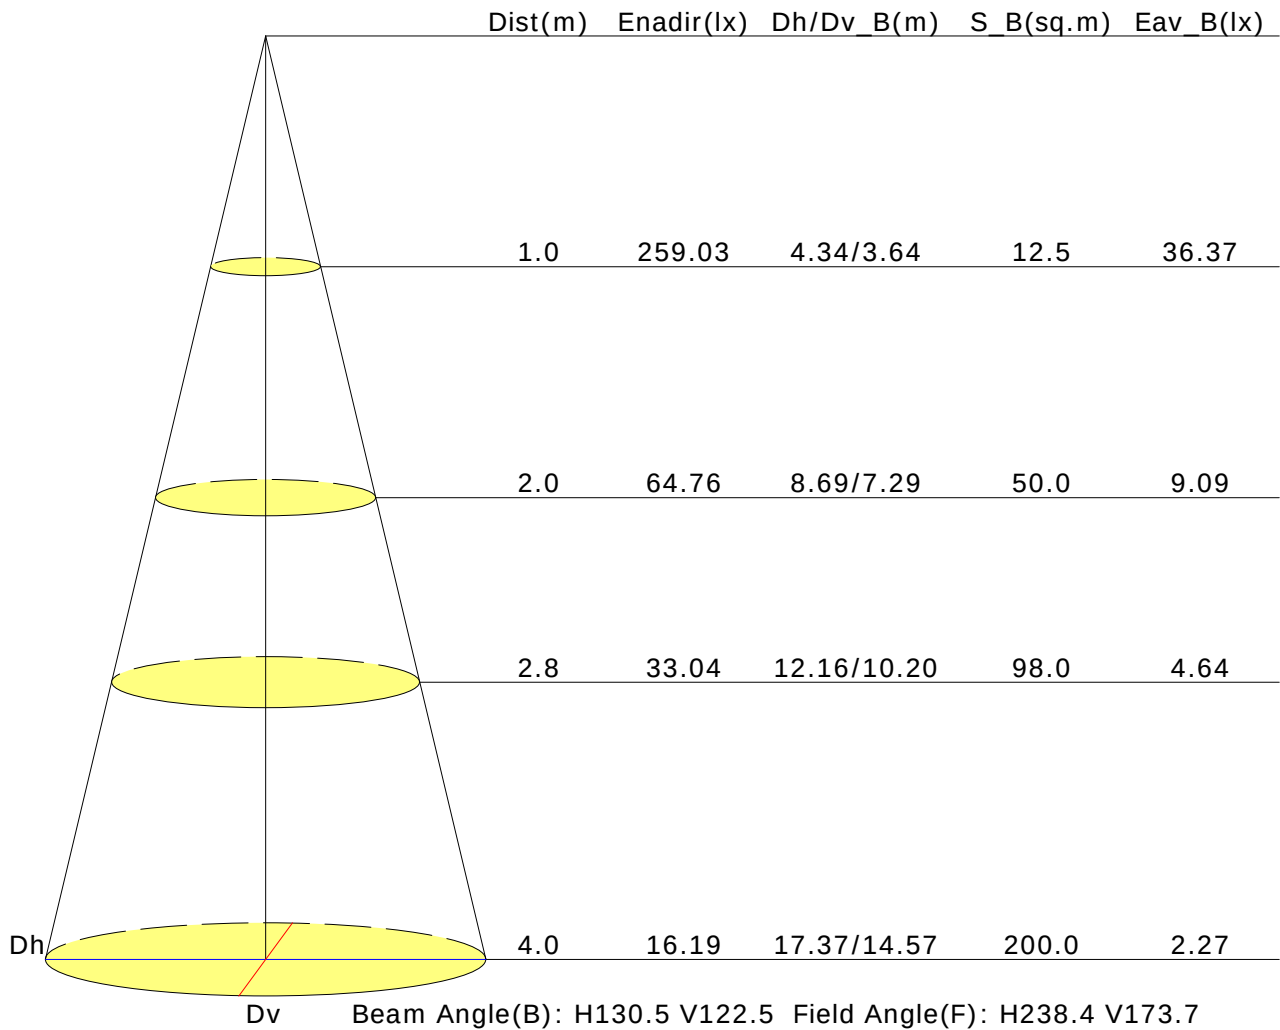

Vertical IsoLux Plot

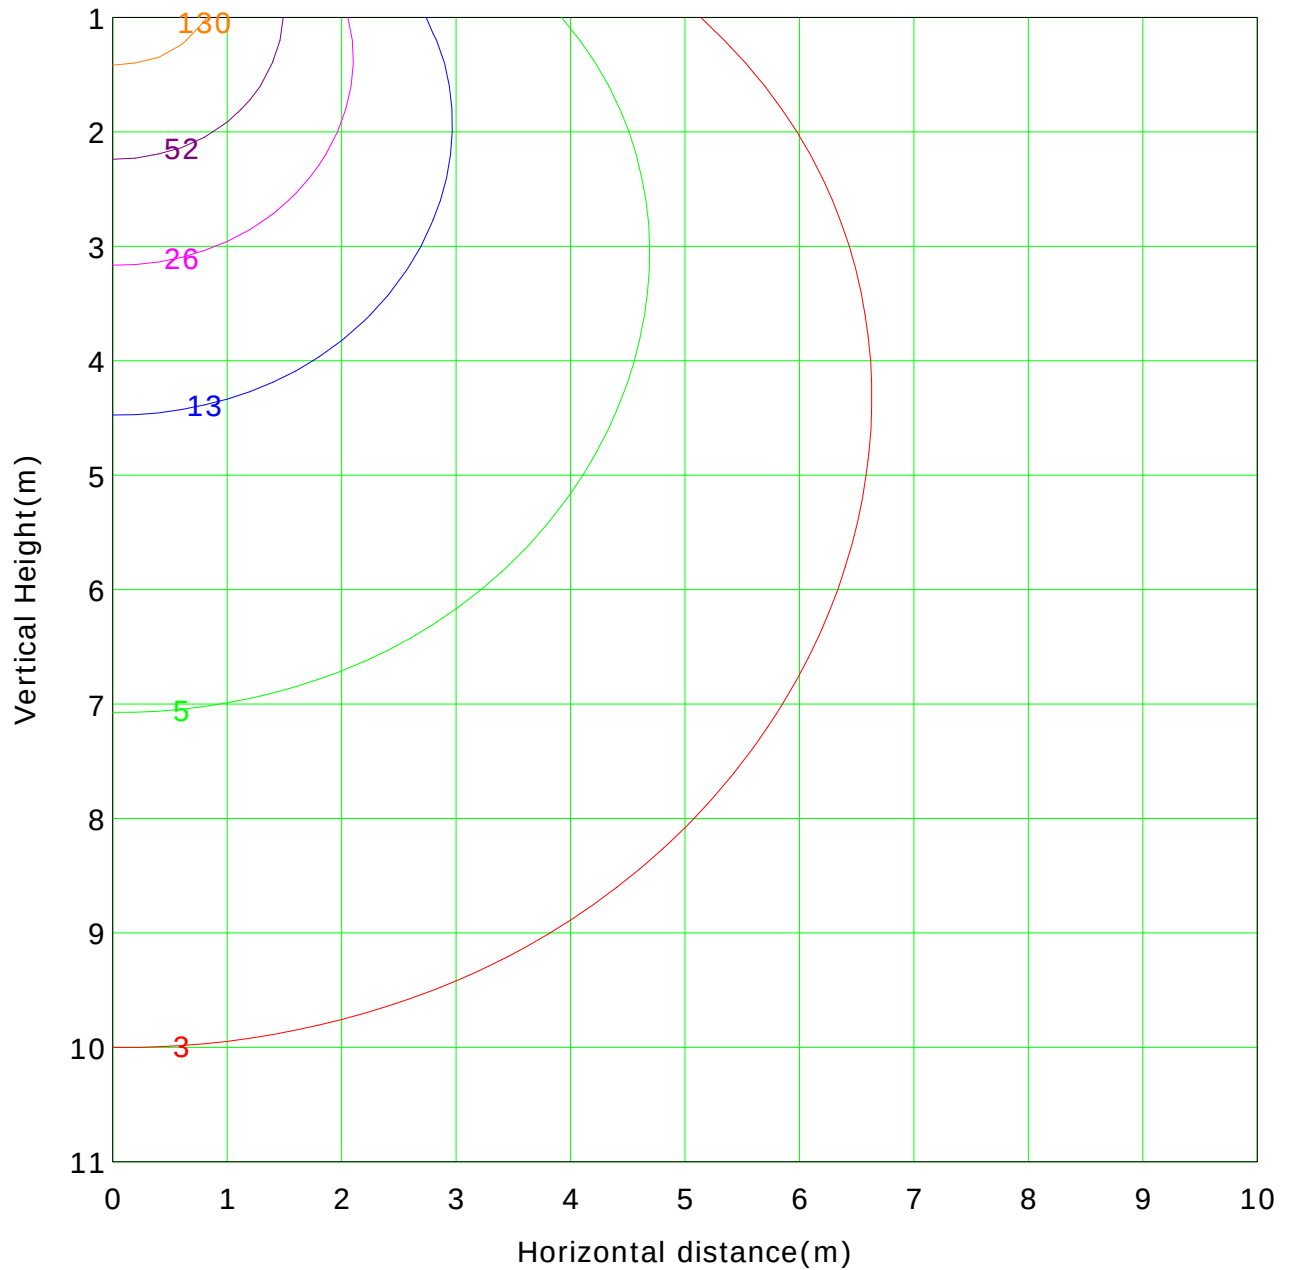

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 259.0 lx

— (1%): 2.6 lx	— (2%): 5.2 lx
— (5%): 13.0 lx	— (10%): 25.9 lx
— (20%): 51.8 lx	— (50%): 129.5 lx
— (100%): 259.0 lx	

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-2000

Distance: 7.970 m

Humidity:

Inspector:

Report No.:

Test Time: 19/01/2021 16:16

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-SL02-06 + LLD-06-XK-L1

Lamp Description: F52-400-60822 90cm

Number of Lamps: 1

Lumens per Lamp: 1434 lm

Voltage: 24.0 V

Current: 0.527 A

Power: 12.65 W

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 1196.4 lm

Downward Ratio: 83.20%

Total Rated Lamp Lumens: 1434.0 lm

Efficiency: 83.43%

Upward Ratio: 0.23%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 154.3, 123.6, 119.7, 120.1

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 111.7, 51.5, 62.9, 62.3

Luminaire Efficacy Rating (LER): 94.63

Central Intensity: 780.41 cd


Max. Intensity: 780.87 cd

Pos of Max. Intensity: H10 V3


S/MH(C0/C180): 1.27

S/MH(C90/C270): 0.82

Picture Of Luminaire

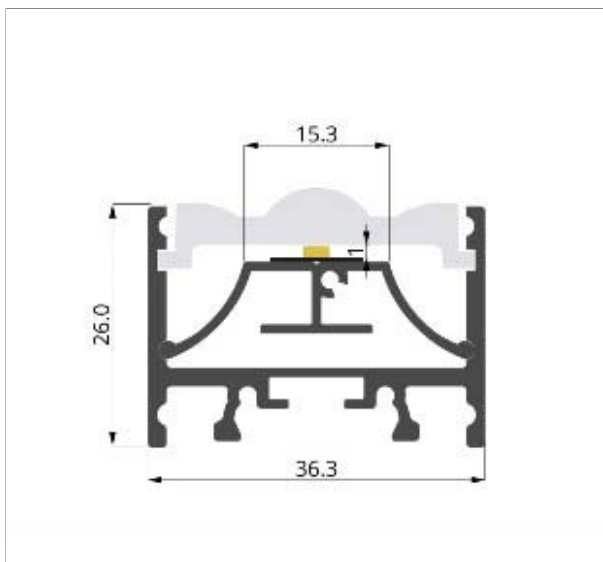

Luminous Intensity Distribution Curve

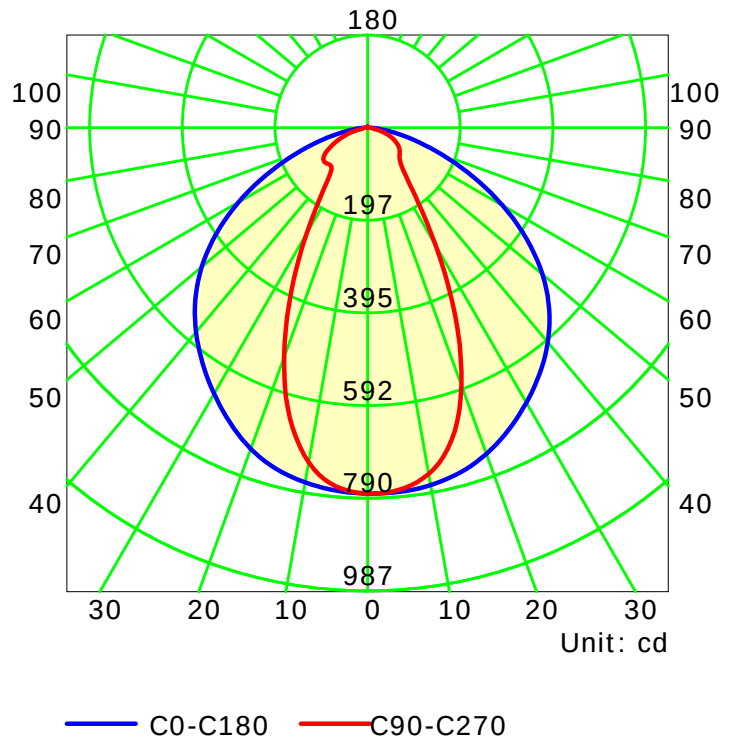

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

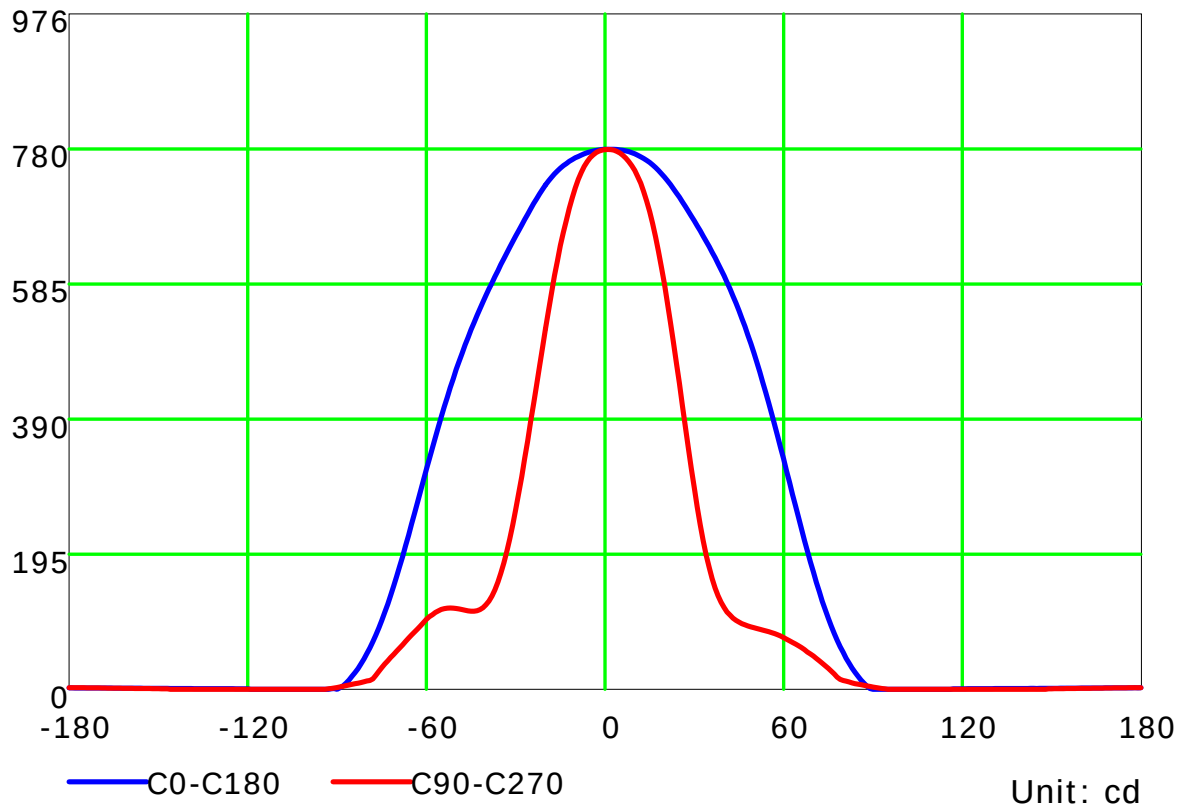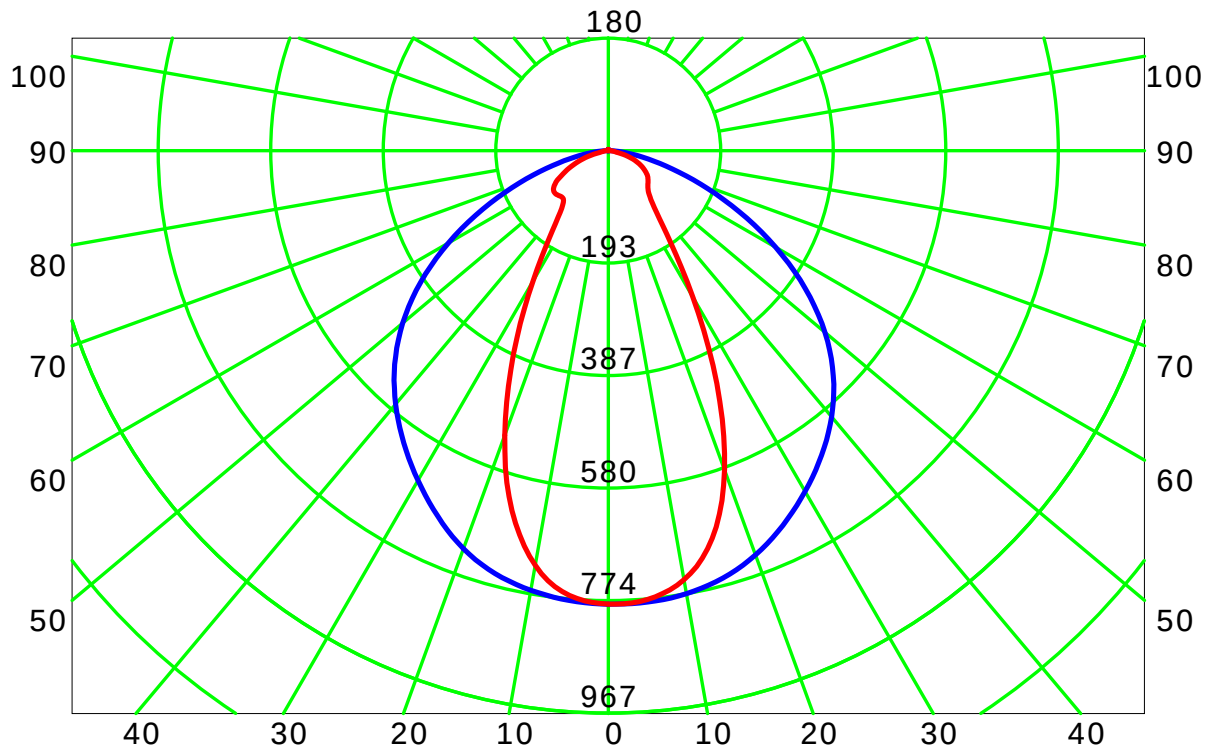

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve(cd /klm)

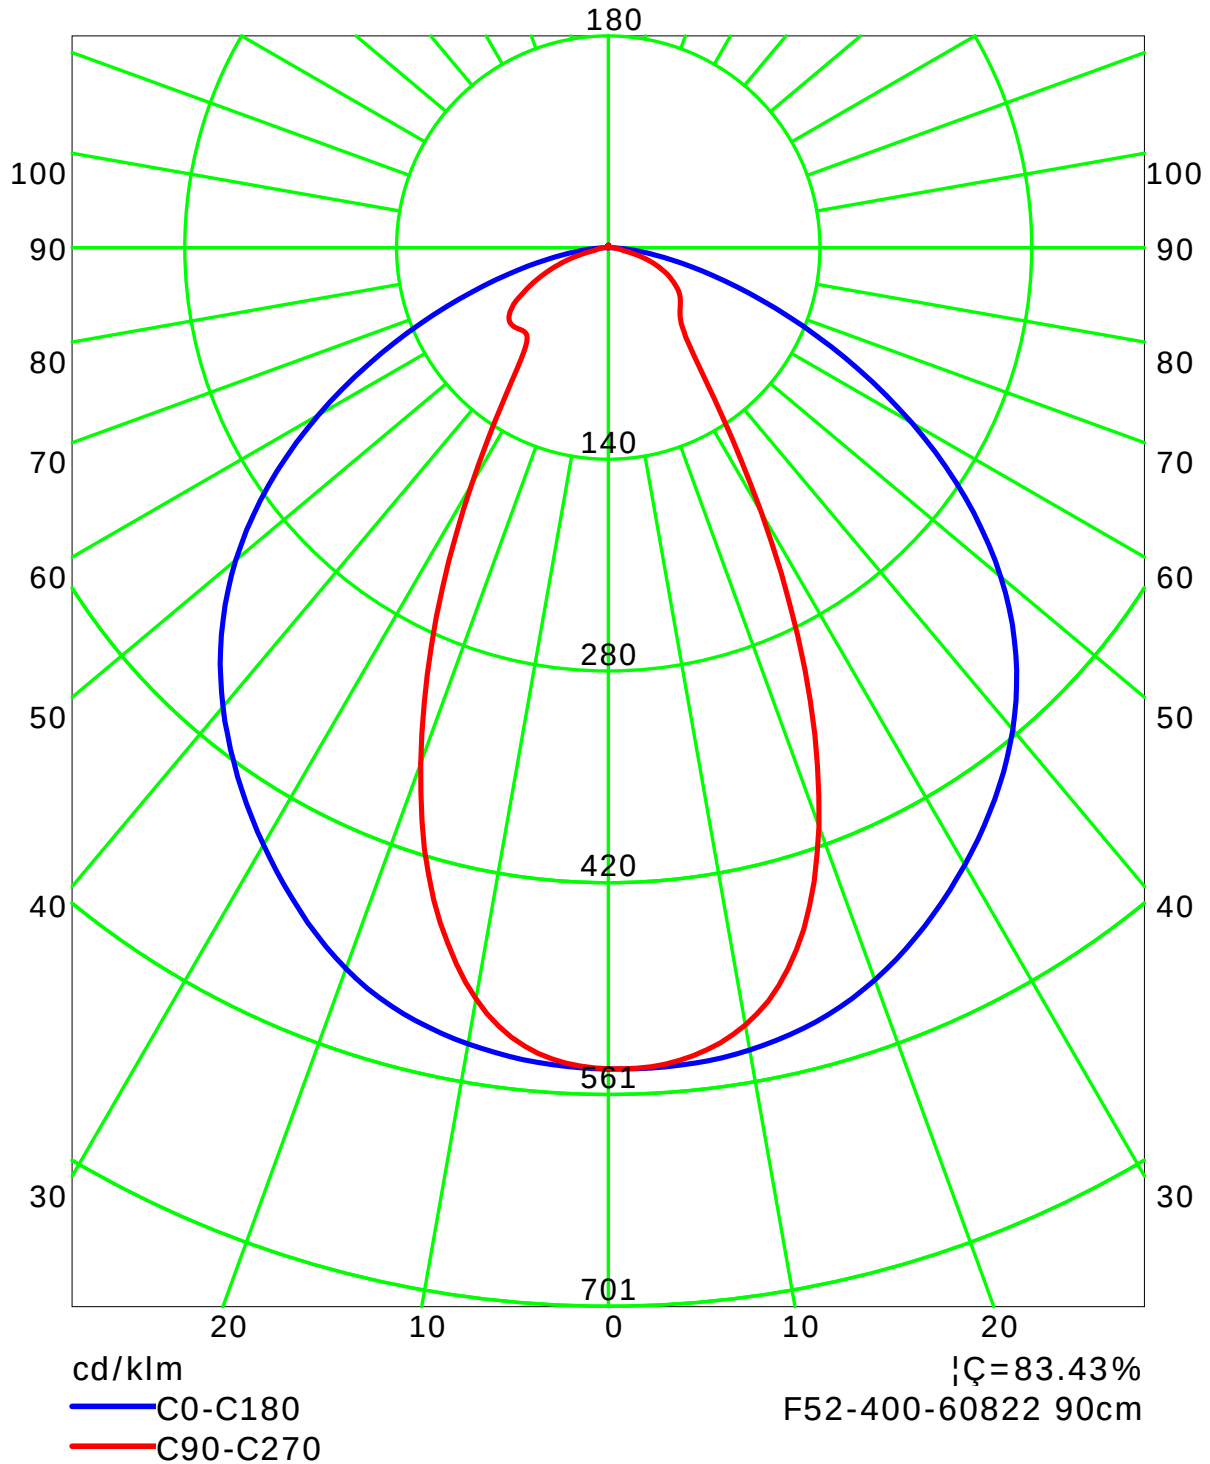

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:

Isocandela (rectangle)

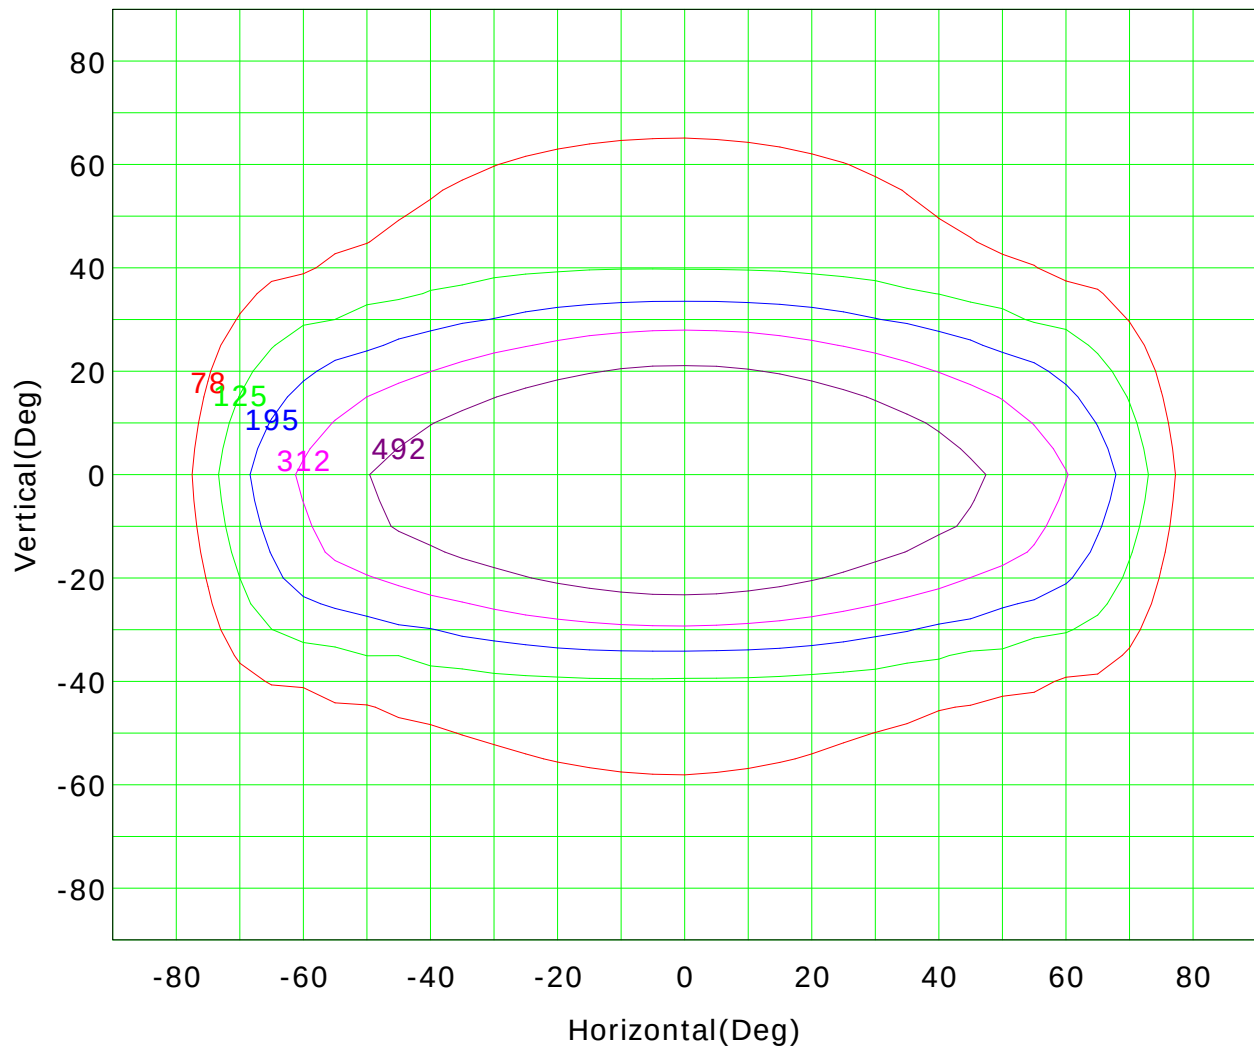

I_{max} (100%): 781 cd

(10%):	78 cd	(16%):	125 cd
(25%):	195 cd	(40%):	312 cd
(63%):	492 cd	(100%):	781 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

Isocandela (sphere)

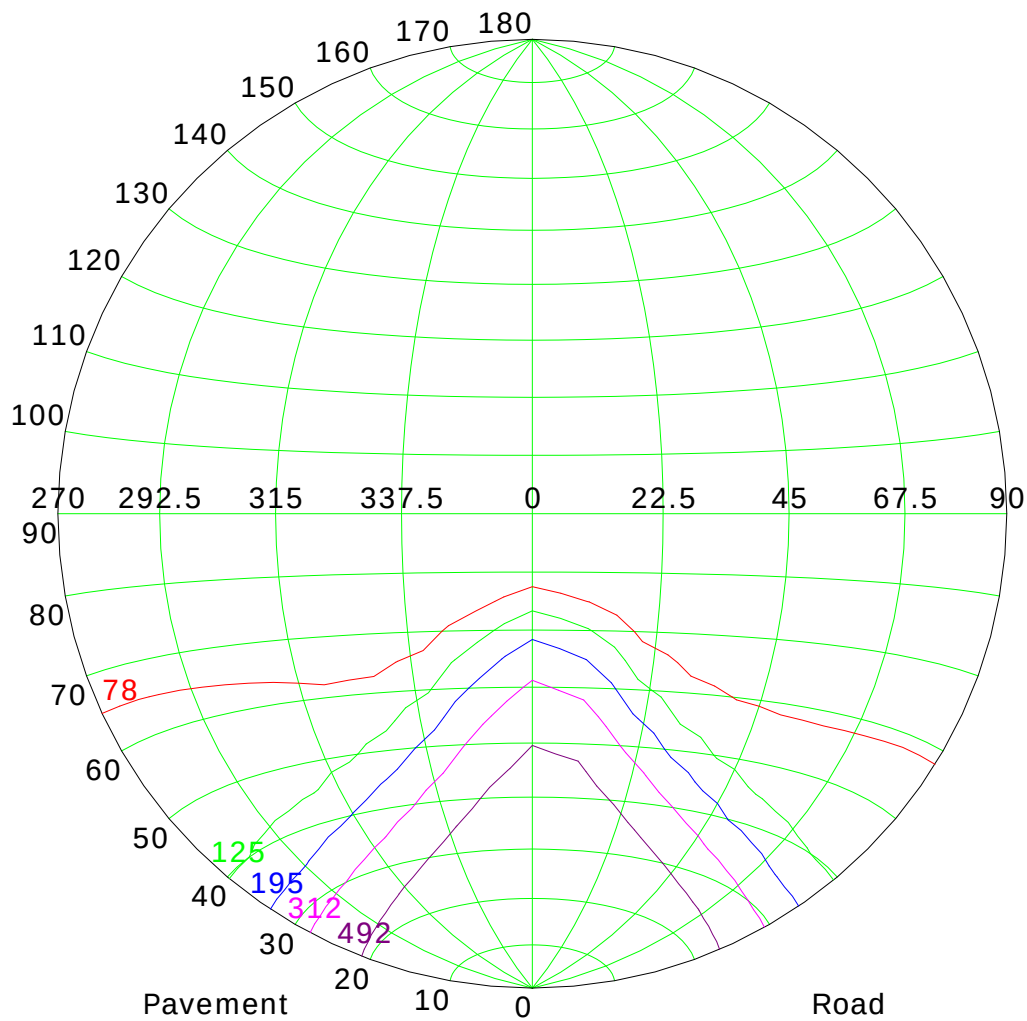

I_{max} (100%): 781 cd

(10%):	78 cd	(16%):	125 cd
(25%):	195 cd	(40%):	312 cd
(63%):	492 cd	(100%):	781 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

IsoLux Plot

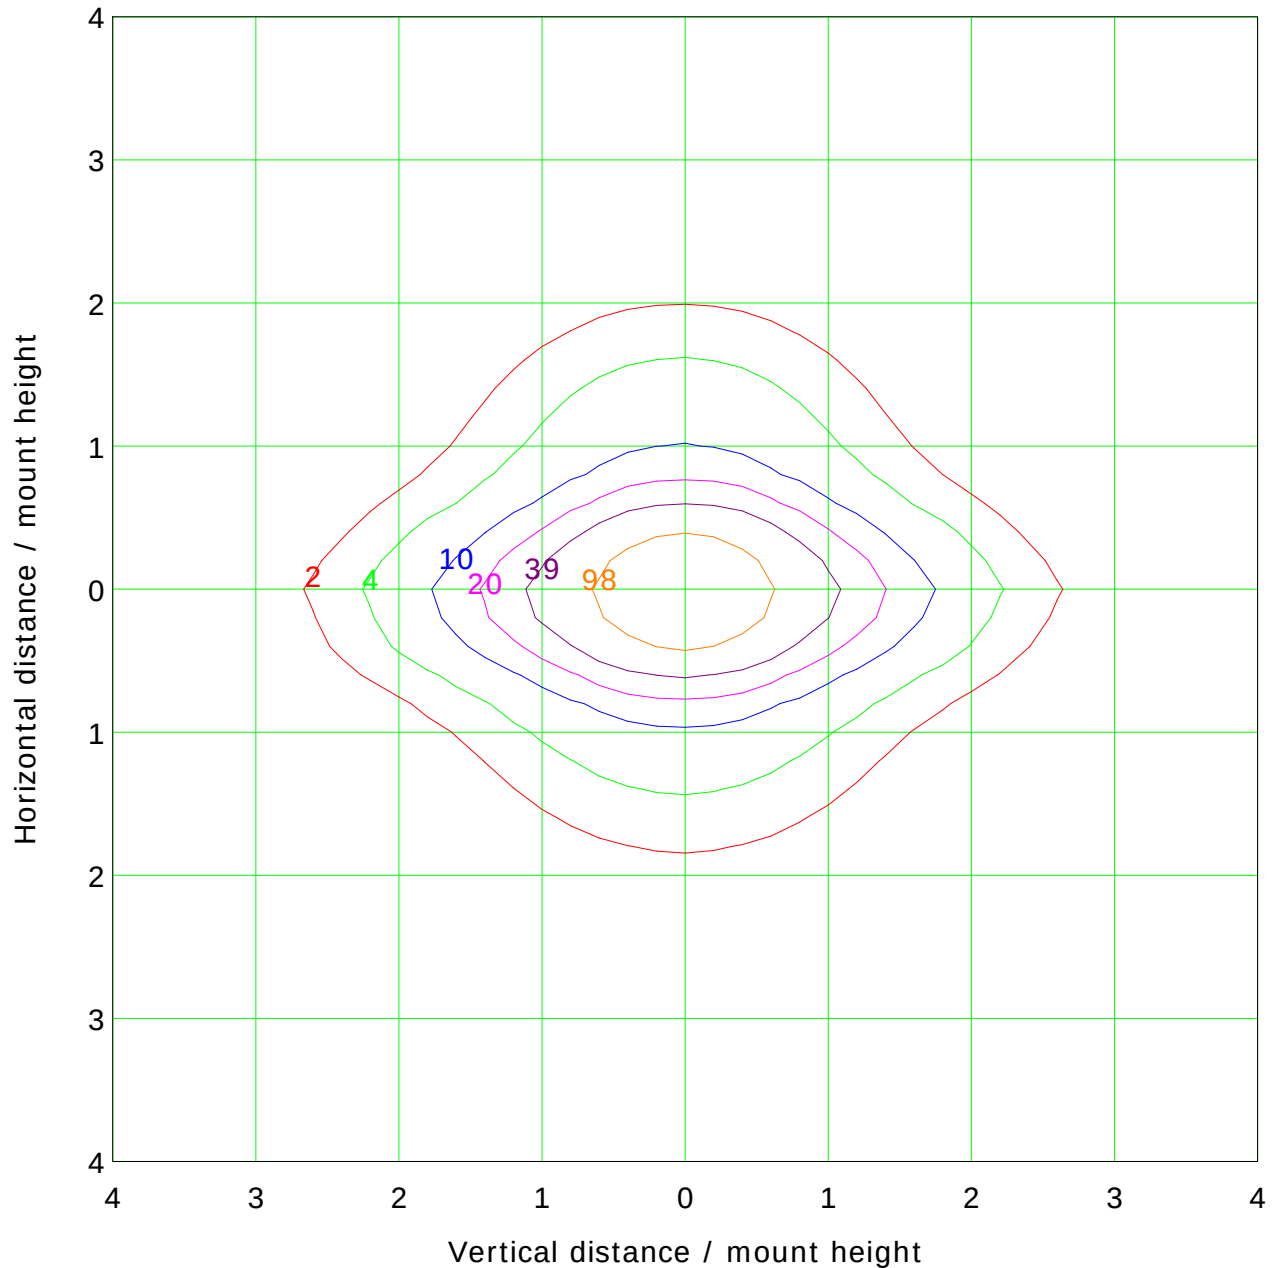

Mounting Height: 2.0m		Max Lux(100%): 195.2 lx	
— (1%):	2.0 lx	— (2%):	3.9 lx
— (5%):	9.8 lx	— (10%):	19.5 lx
— (20%):	39.0 lx	— (50%):	97.6 lx
— (100%):	195.2 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 7.979 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

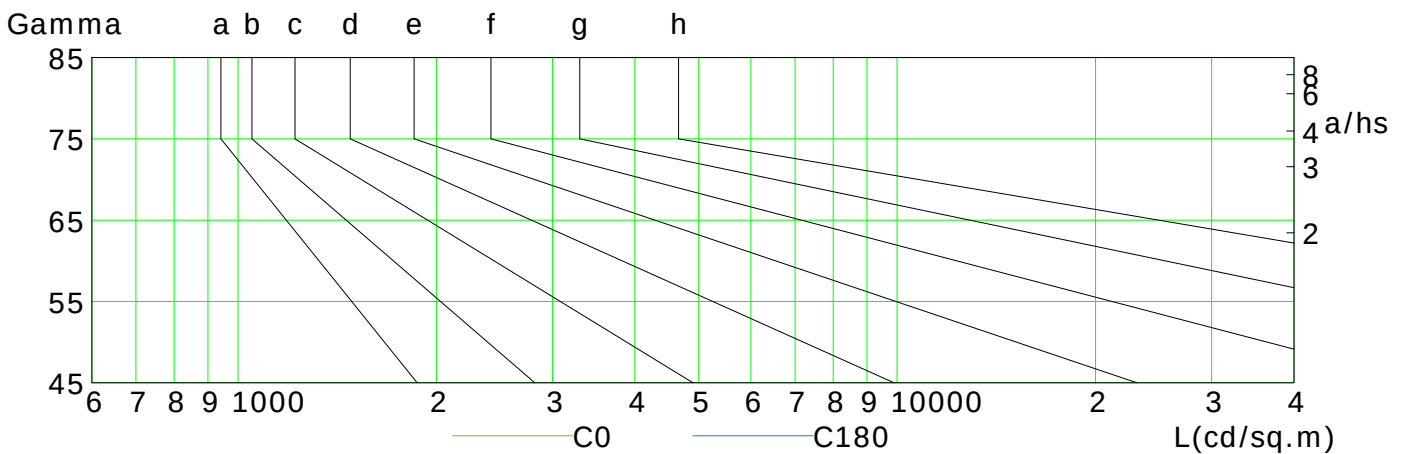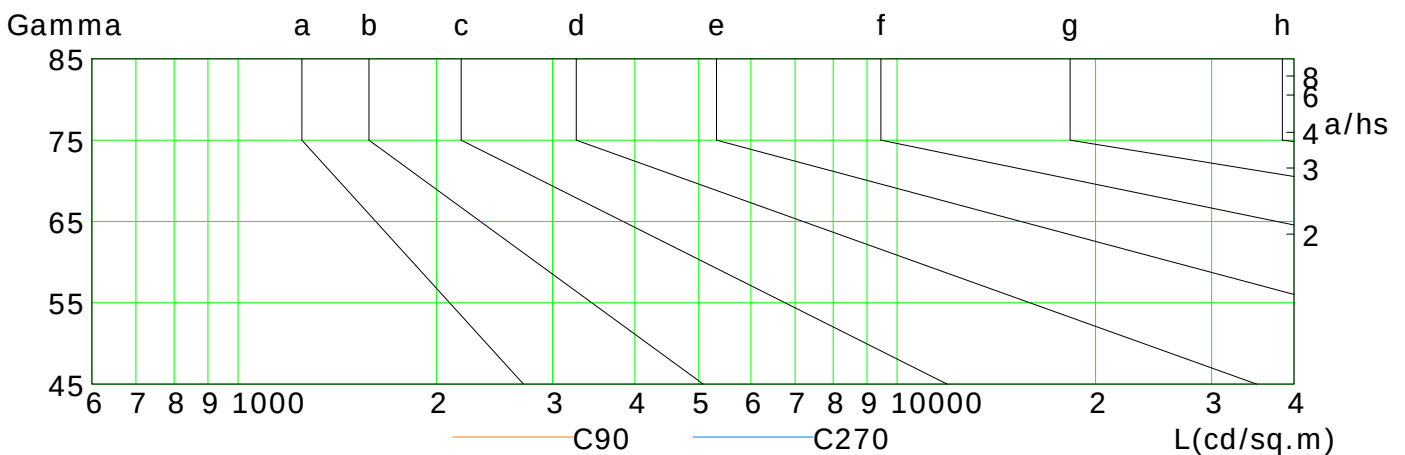

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	547	487	414	333	248	170	103	53	19
C90	97	89	83	75	63	48	30	13	7
C180	520	462	394	318	239	163	99	52	19
C270	113	117	115	101	79	55	31	12	7

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m


Humidity:

Inspector:

Illuminance at a Distance

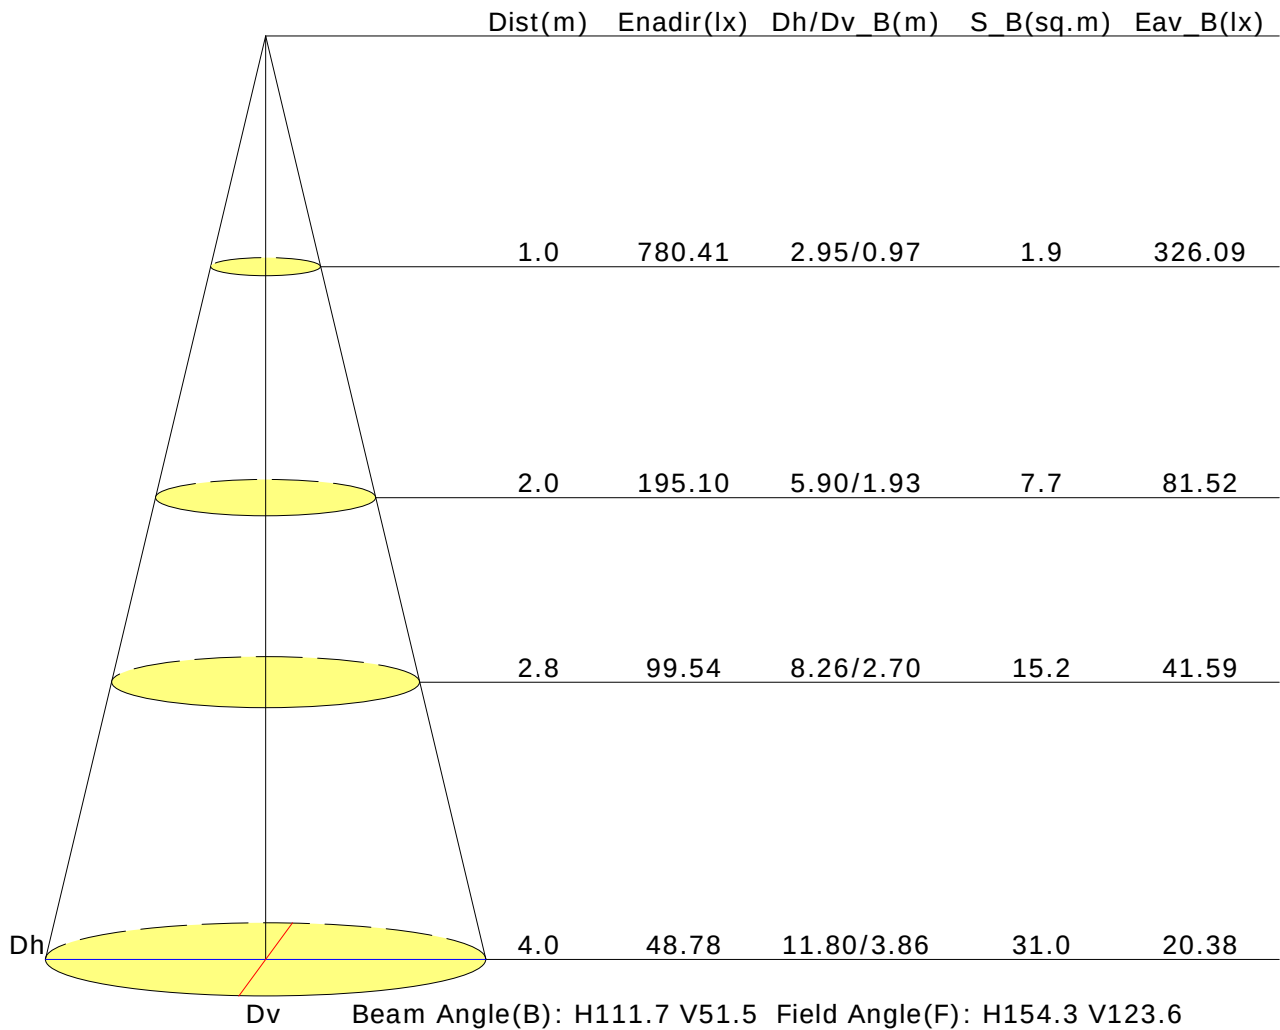

Vertical IsoLux Plot

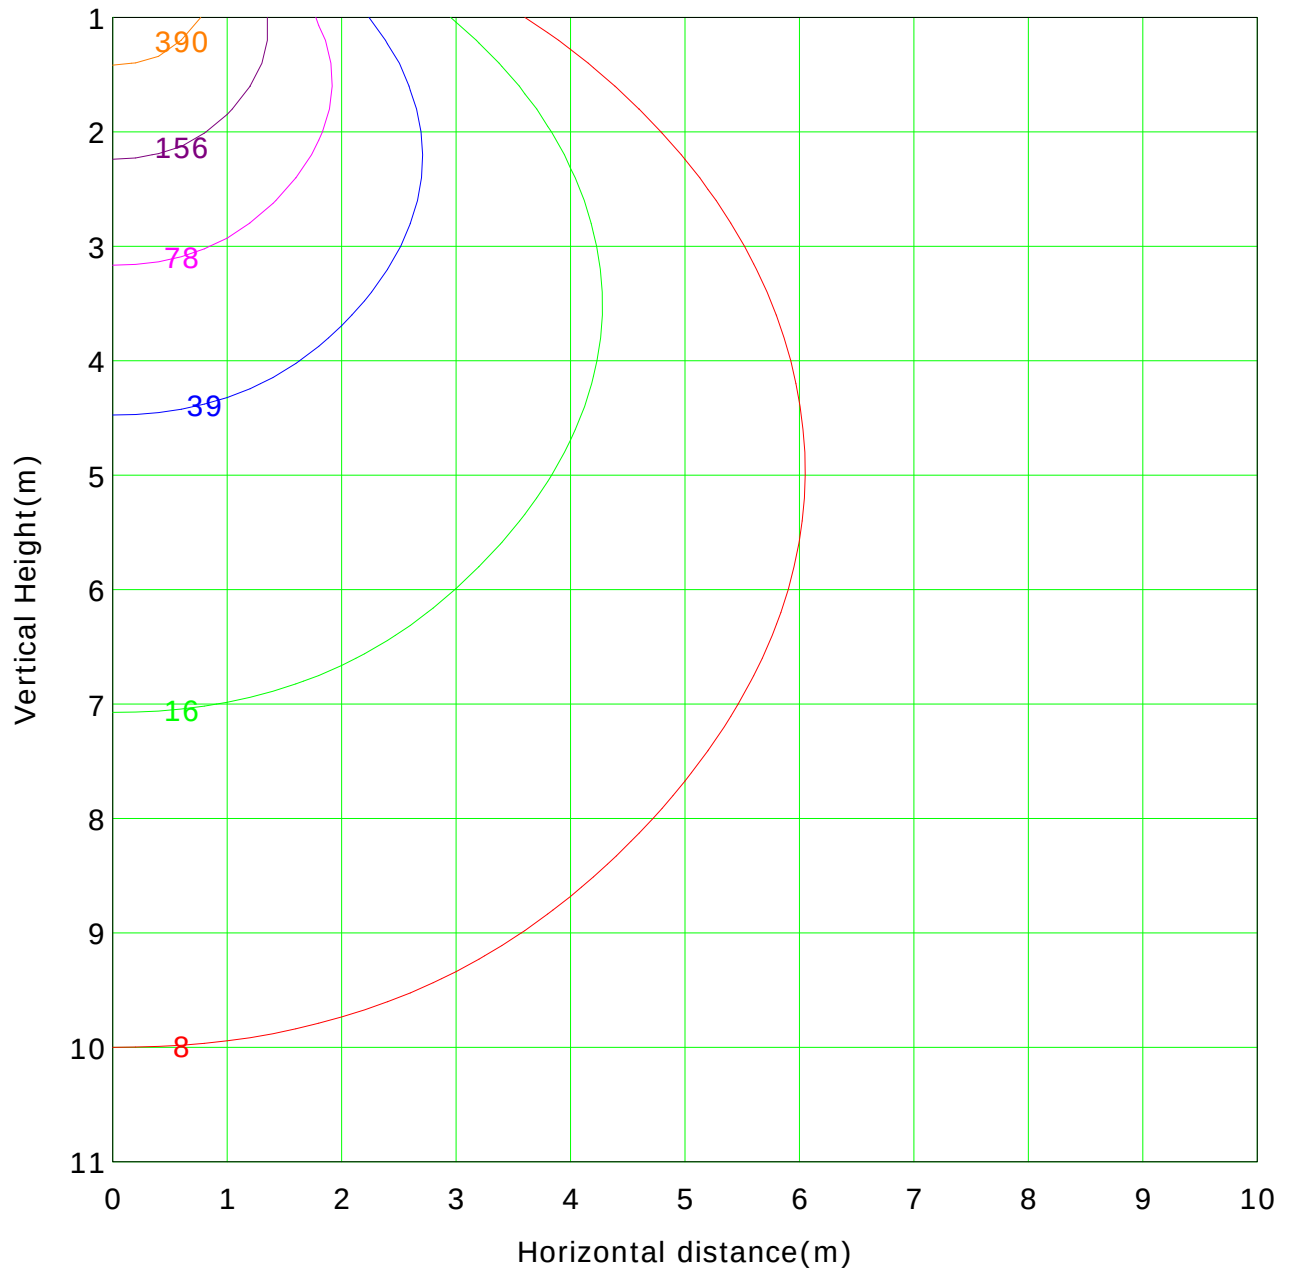

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 780.4 lx

(1%): 7.8 lx	(2%): 15.6 lx
(5%): 39.0 lx	(10%): 78.0 lx
(20%): 156.1 lx	(50%): 390.2 lx
(100%): 780.4 lx	

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:

Report No.:

Test Time: 21/01/2021 11:04

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-SL02-06 + LLD-06-XK-L2

Lamp Description: F52-400-60822 90cm

Number of Lamps: 1

Lumens per Lamp: 1434 lm

Voltage: 24.0 V

Current: 0.531 A

Power: 12.73 W

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 1158 lm

Downward Ratio: 80.62%

Total Rated Lamp Lumens: 1434.0 lm

Efficiency: 80.75%

Upward Ratio: 0.14%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 162.6, 136.8, 153.9, 154.2

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 108.5, 89.9, 105.1, 104.8

Luminaire Efficacy Rating (LER): 91.02

Central Intensity: 467.97 cd


Max. Intensity: 469.27 cd

Pos of Max. Intensity: H20 V3


S/MH(C0/C180): 1.21

S/MH(C90/C270): 1.23

Picture Of Luminaire

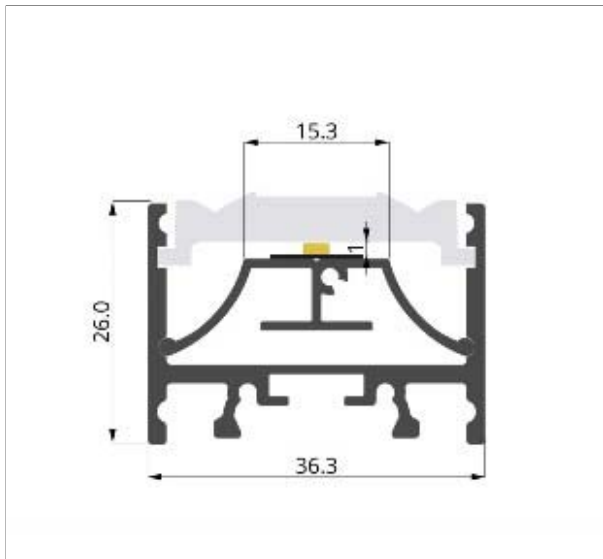

Luminous Intensity Distribution Curve

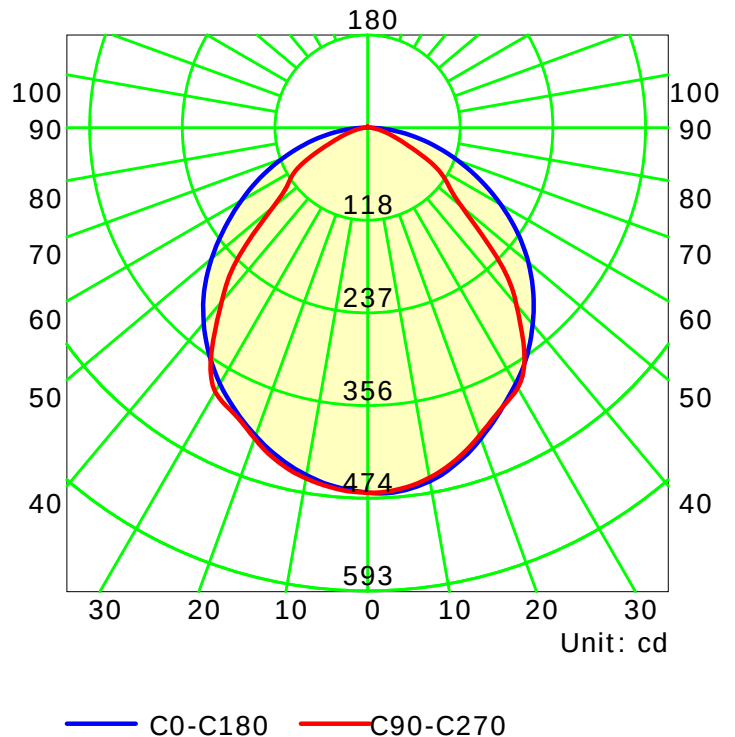

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

Luminous Intensity Distribution Curve

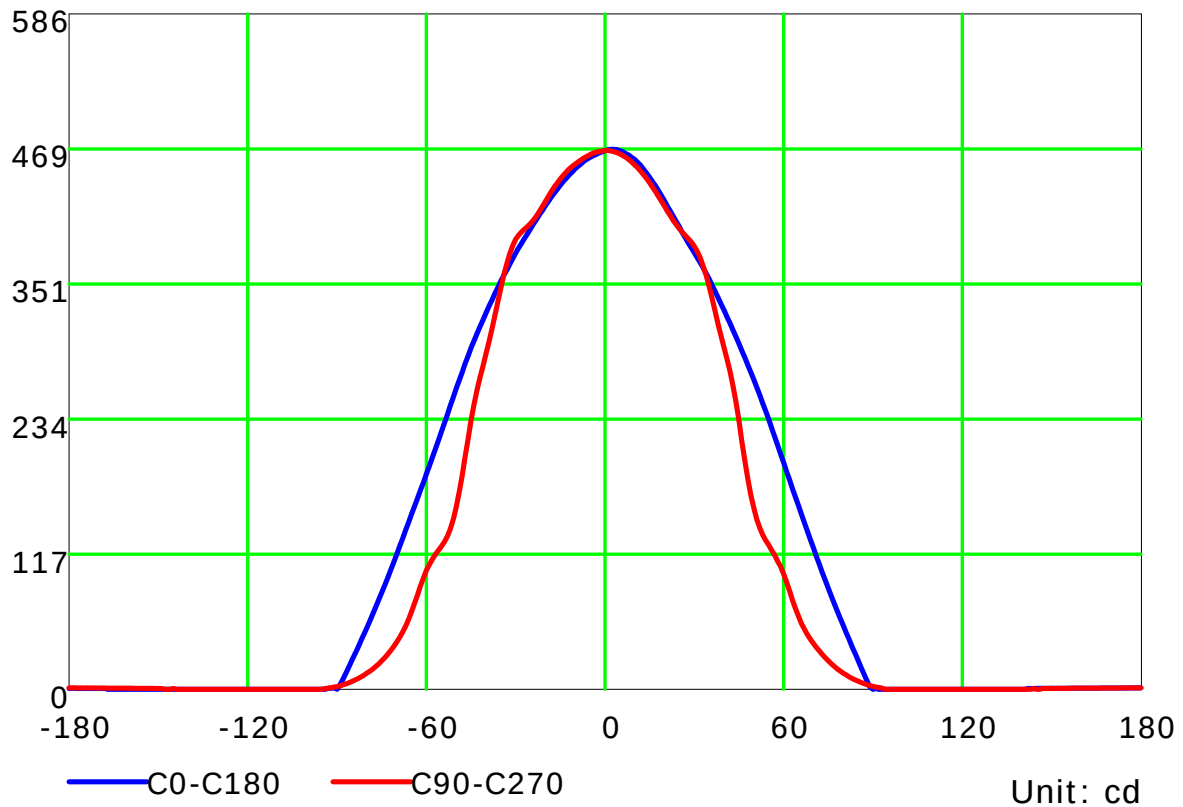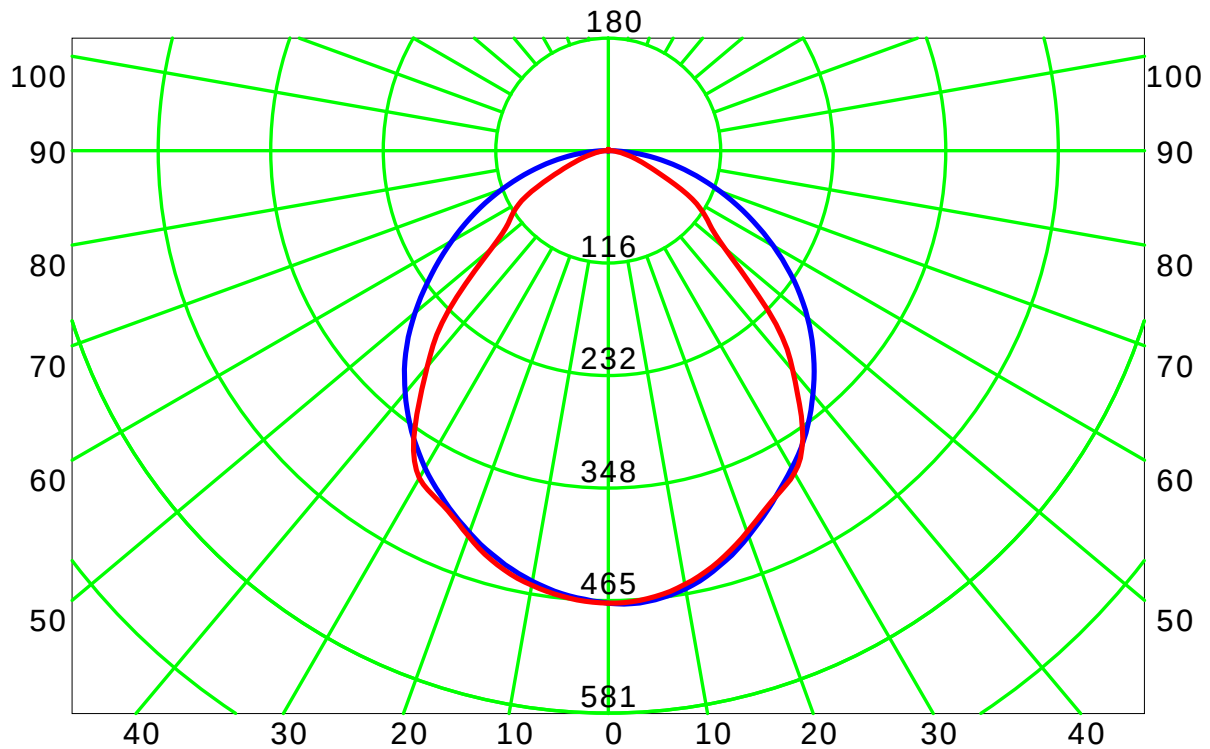

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve(cd / klm)

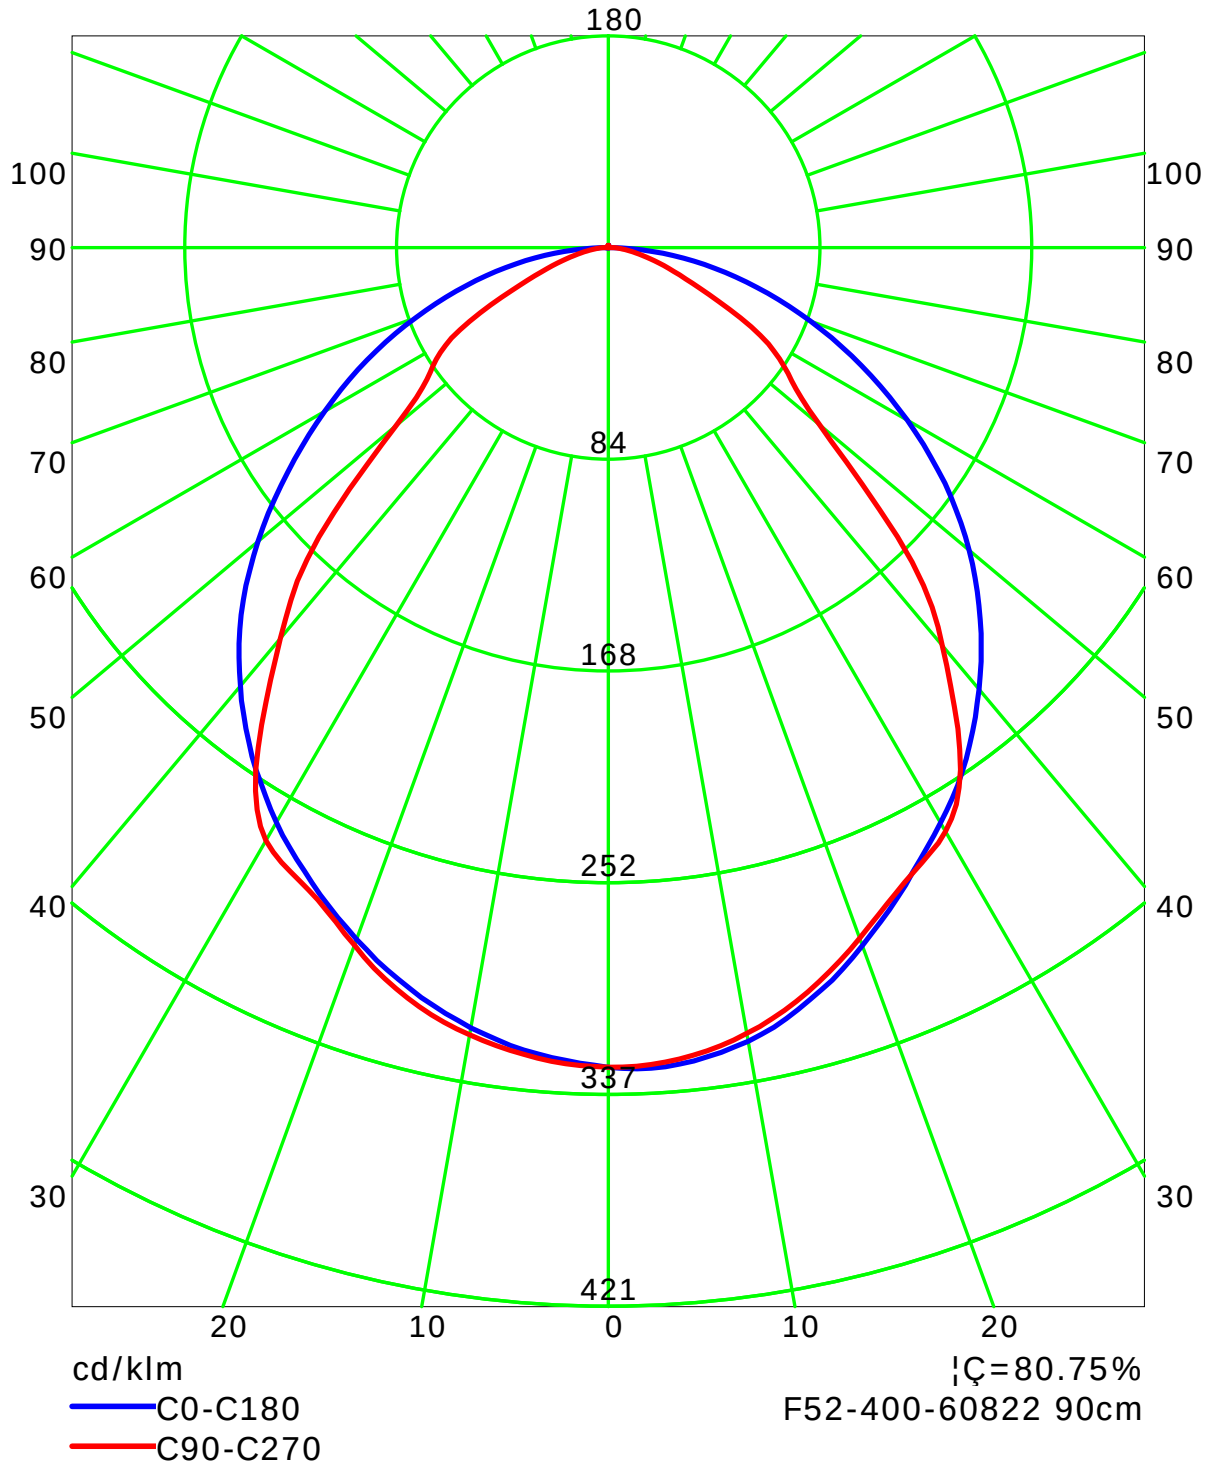

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:

Isocandela (rectangle)

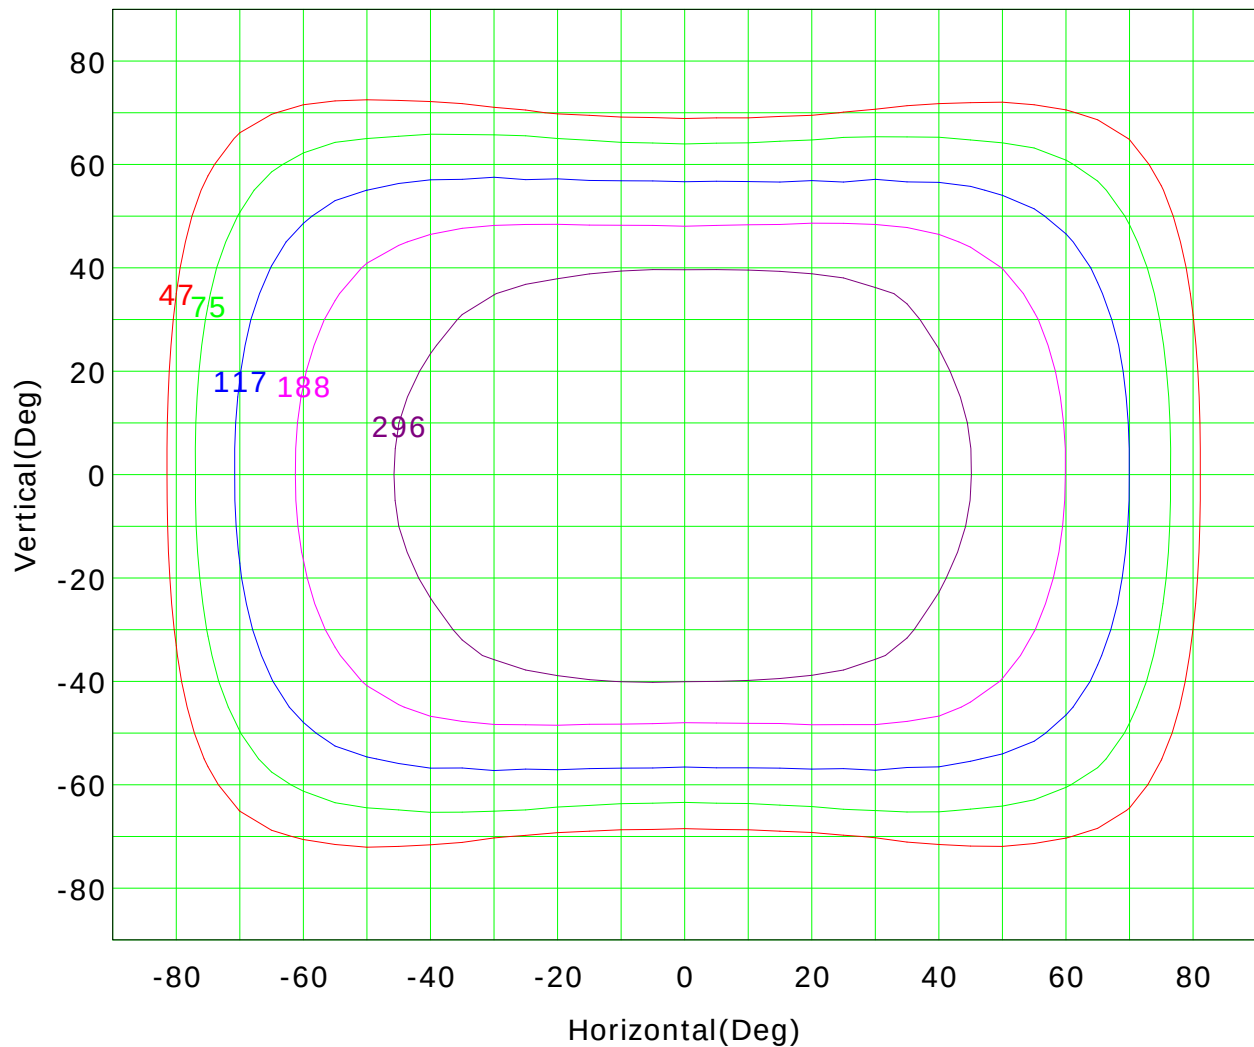

I_{max} (100%): 469 cd

(10%):	47 cd	(16%):	75 cd
(25%):	117 cd	(40%):	188 cd
(63%):	296 cd	(100%):	469 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

Isocandela (sphere)

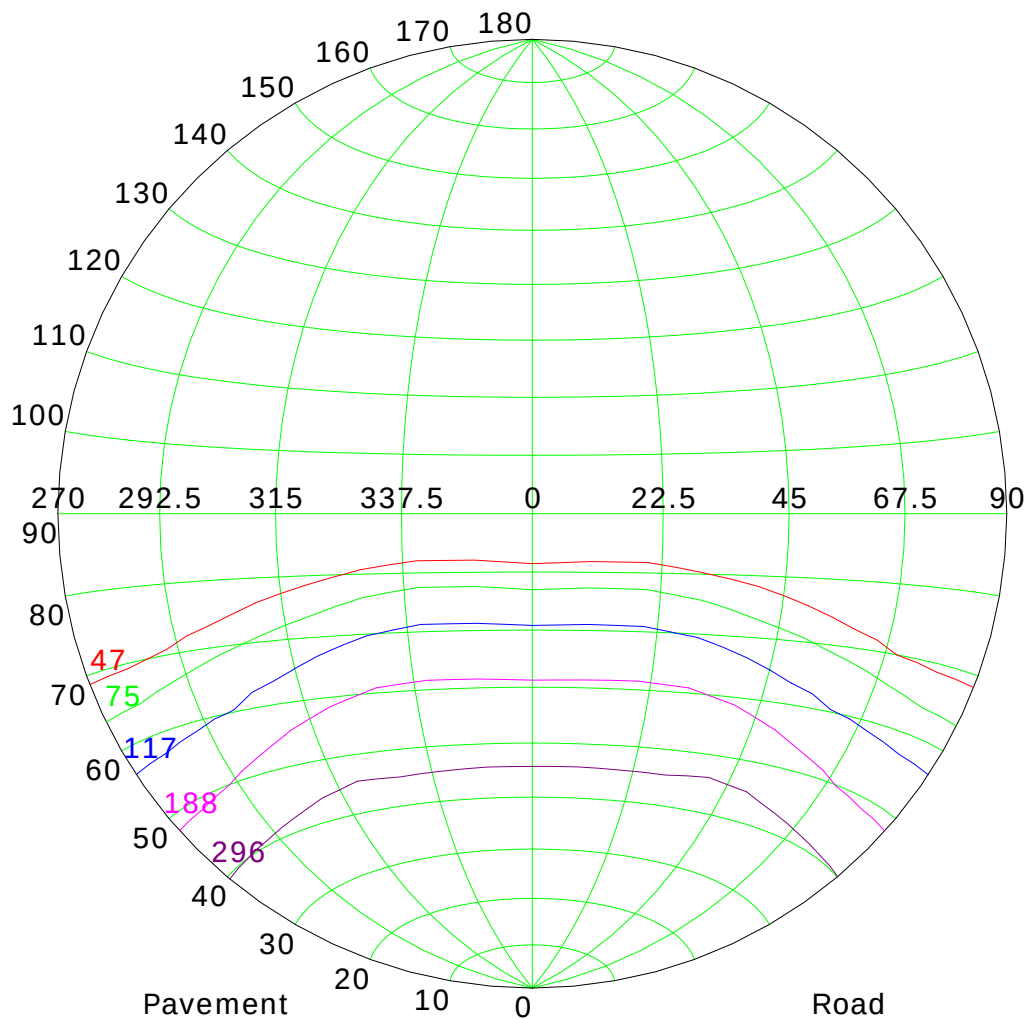

I_{max} (100%): 469 cd

(10%):	47 cd	(16%):	75 cd
(25%):	117 cd	(40%):	188 cd
(63%):	296 cd	(100%):	469 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

IsoLux Plot

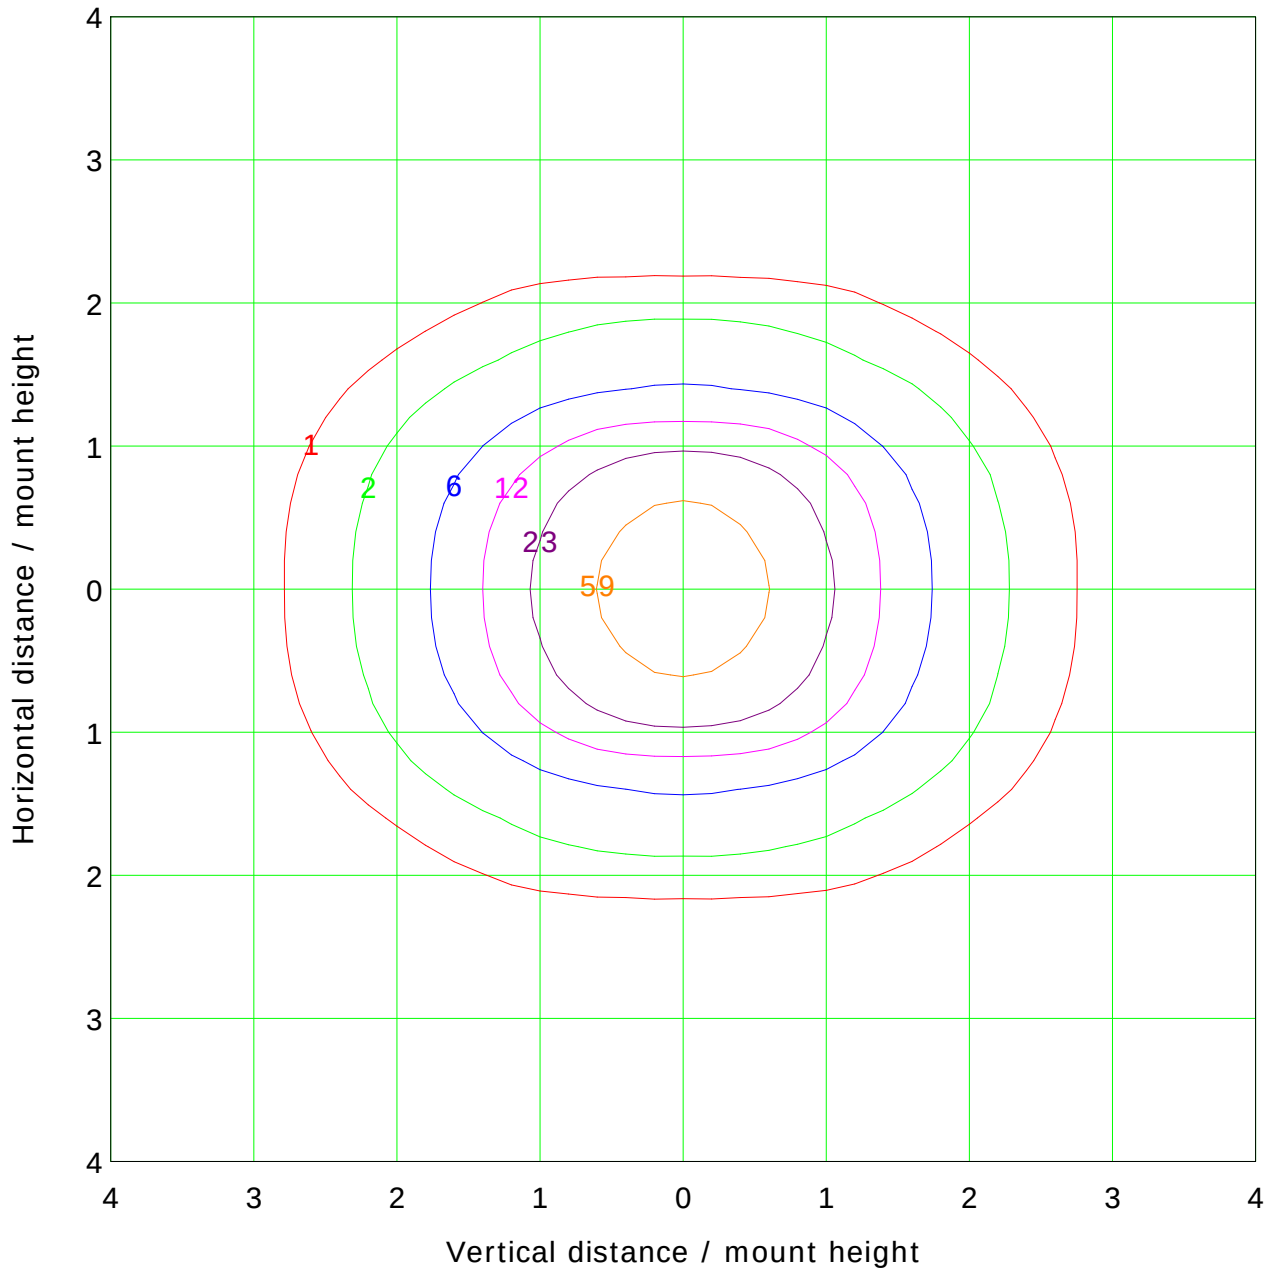

Mounting Height: 2.0m		Max Lux(100%): 117.1 lx	
— (1%):	1.2 lx	— (2%):	2.3 lx
— (5%):	5.9 lx	— (10%):	11.7 lx
— (20%):	23.4 lx	— (50%):	58.6 lx
— (100%):	117.1 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 7.979 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

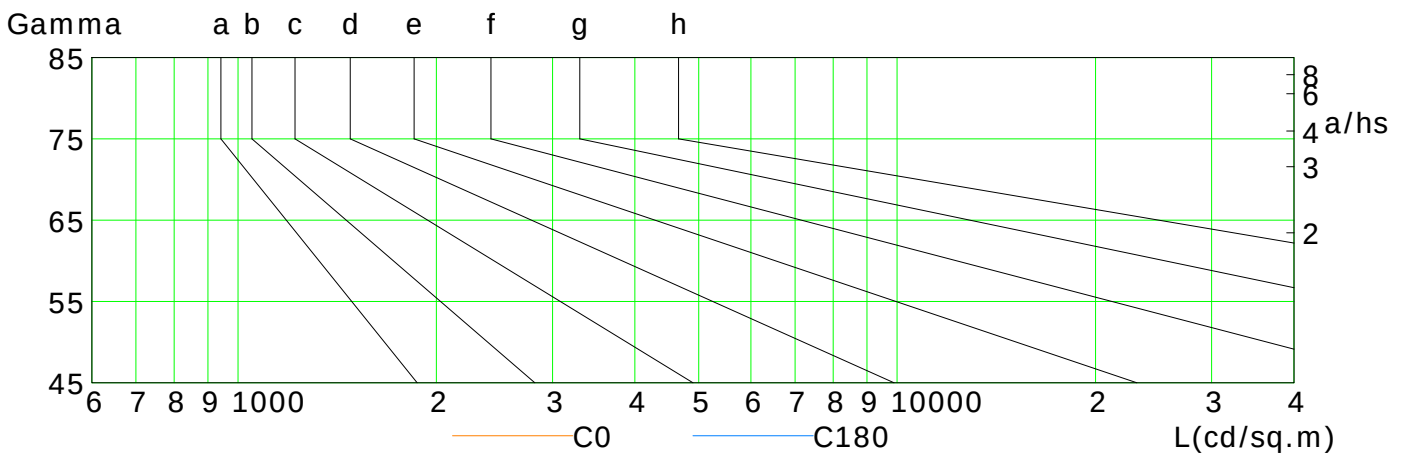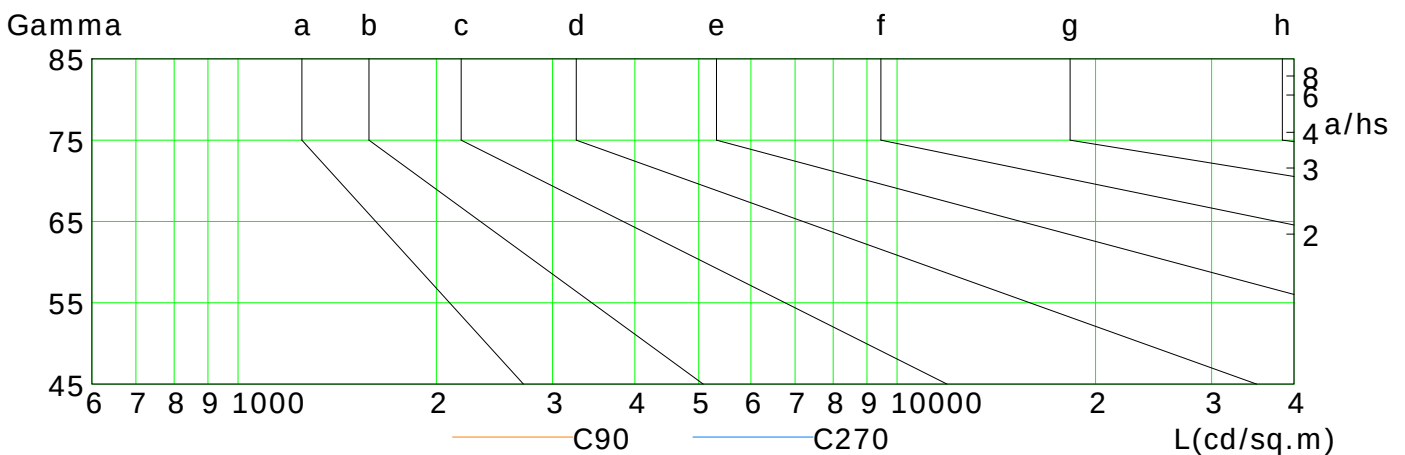

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	300	269	235	197	159	123	88	56	25
C90	233	157	125	100	63	40	25	14	7
C180	296	261	223	187	152	117	84	53	25
C270	234	158	124	103	67	41	25	14	7

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m


Humidity:

Inspector:

Illuminance at a Distance

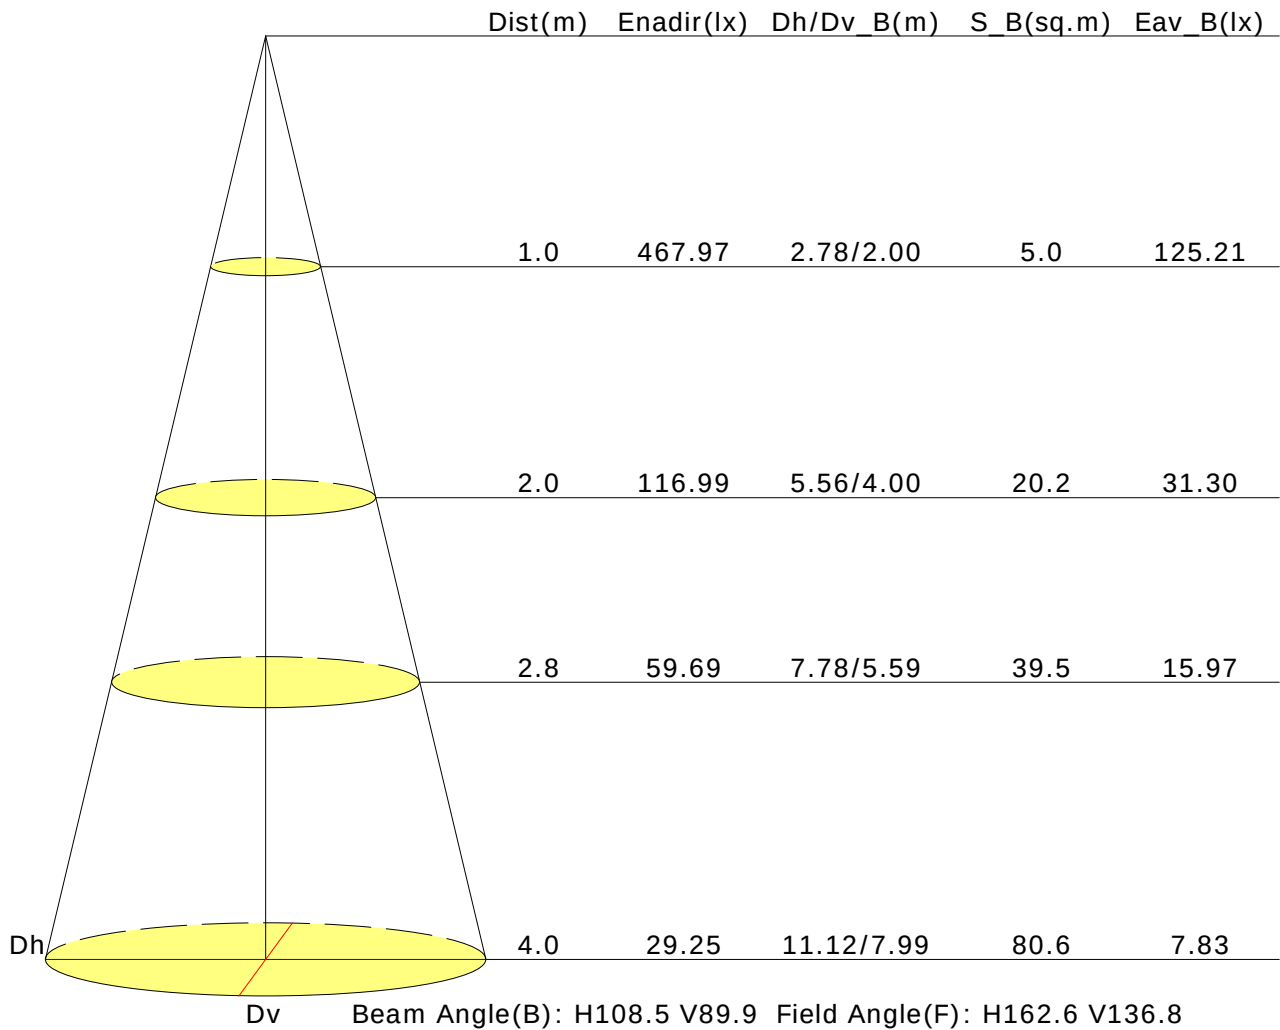

Vertical IsoLux Plot

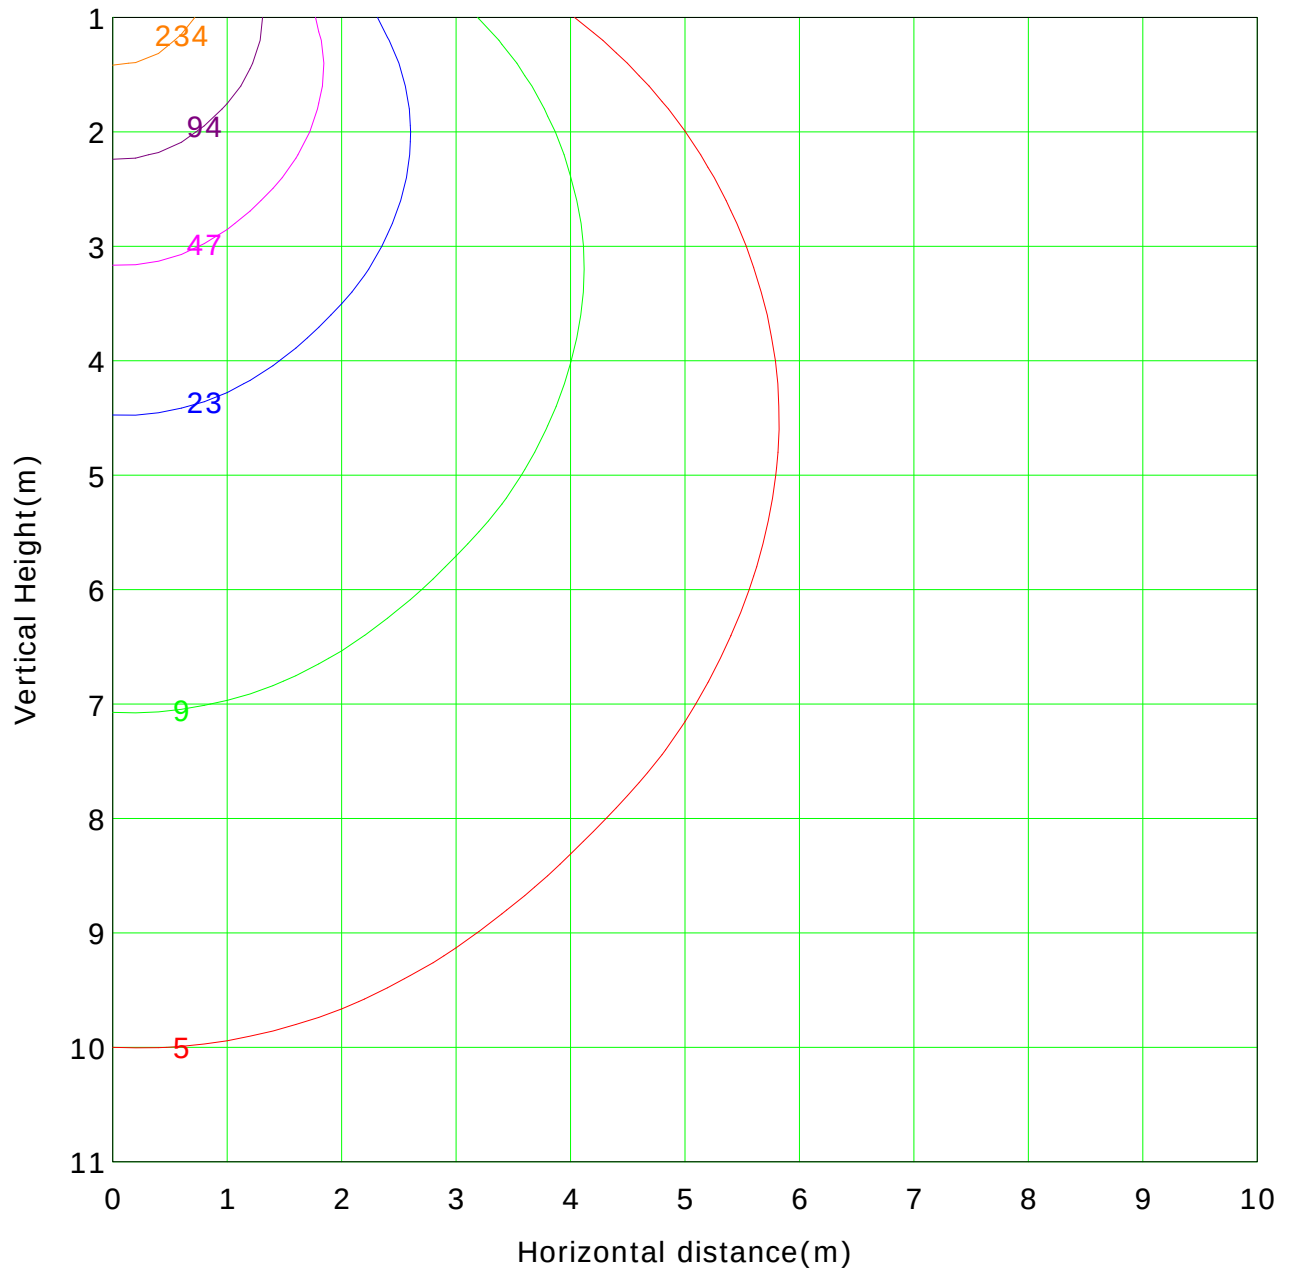

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 468.0 lx

— (1%): 4.7 lx	— (2%): 9.4 lx
— (5%): 23.4 lx	— (10%): 46.8 lx
— (20%): 93.6 lx	— (50%): 234.0 lx
— (100%): 468.0 lx	

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:

Report No.:

Test Time: 20/01/2021 14:33

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-SL02-06 + LLD-06-XK-L3

Lamp Description: F52-400-60822 90cm

Number of Lamps: 1

Lumens per Lamp: 1434 lm

Voltage: 24.0 V

Current: 0.531 A

Power: 12.74 W

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 1131.1 lm

Downward Ratio: 78.70%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 150.1, 142.6, 143.2, 143.0

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 86.9, 63.4, 69.8, 70.6

Luminaire Efficacy Rating (LER): 88.84

Total Rated Lamp Lumens: 1434.0 lm

Efficiency: 78.88%

Upward Ratio: 0.17%

Central Intensity: 561.75 cd


Max. Intensity: 646.1 cd

Pos of Max. Intensity: H90 V12


S/MH(C0/C180): 1.11

S/MH(C90/C270): 0.95

Picture Of Luminaire

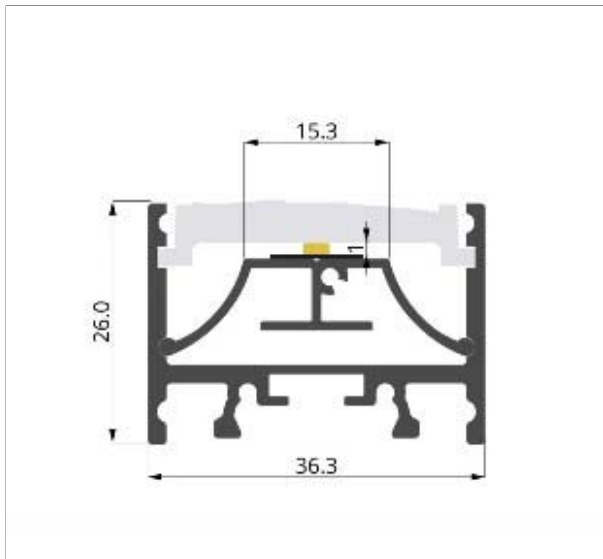

Luminous Intensity Distribution Curve

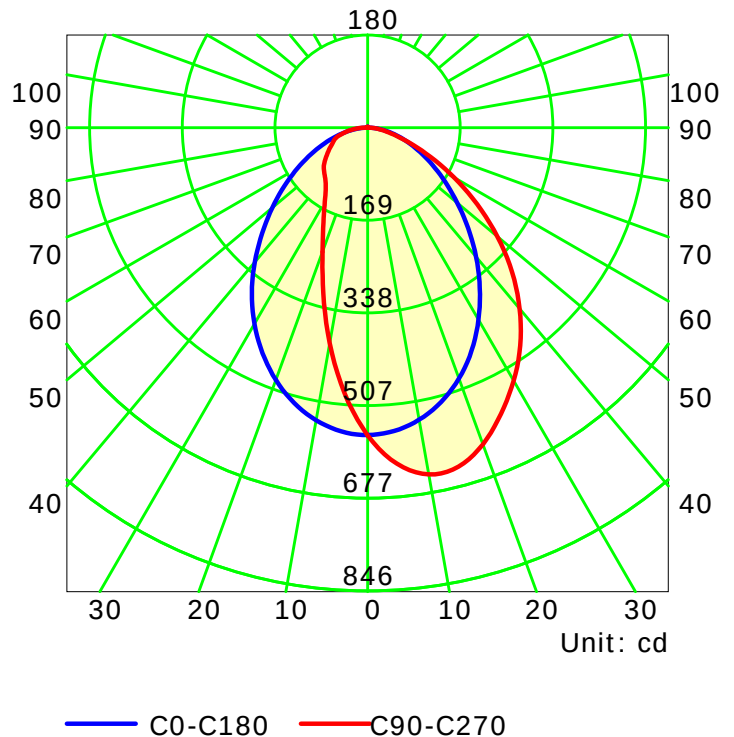

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

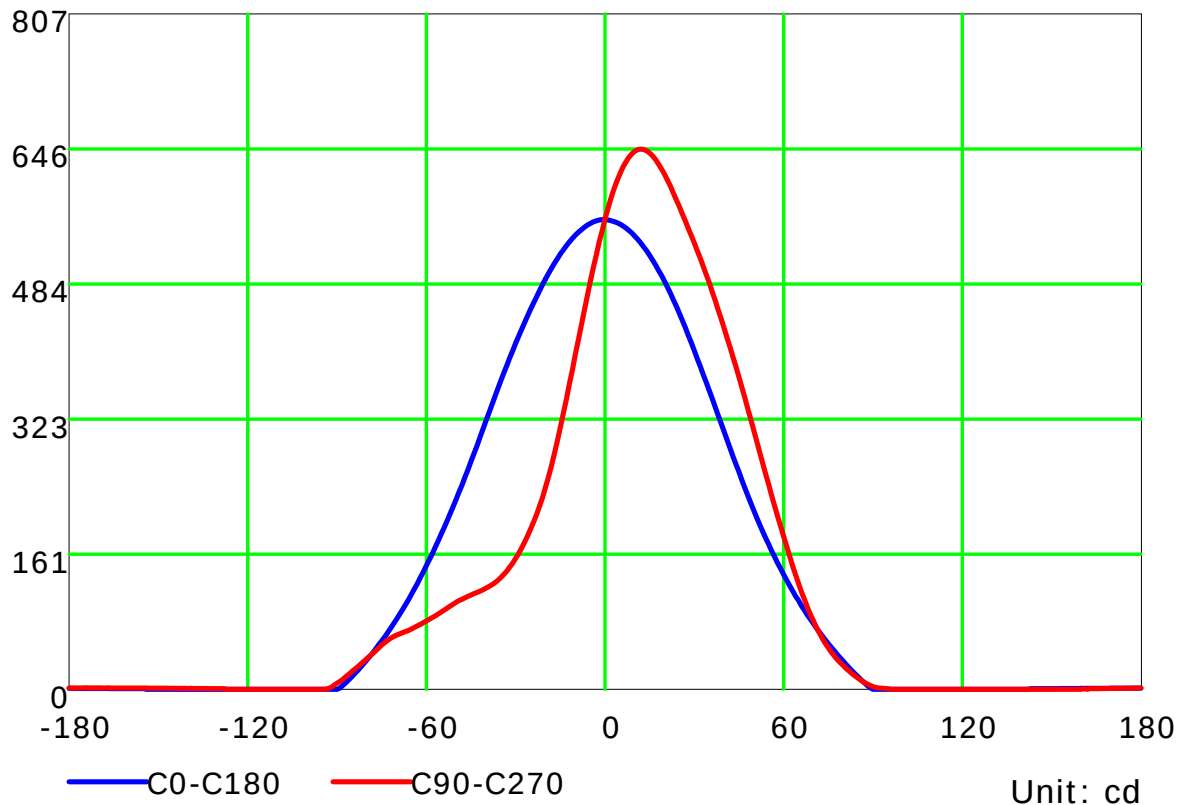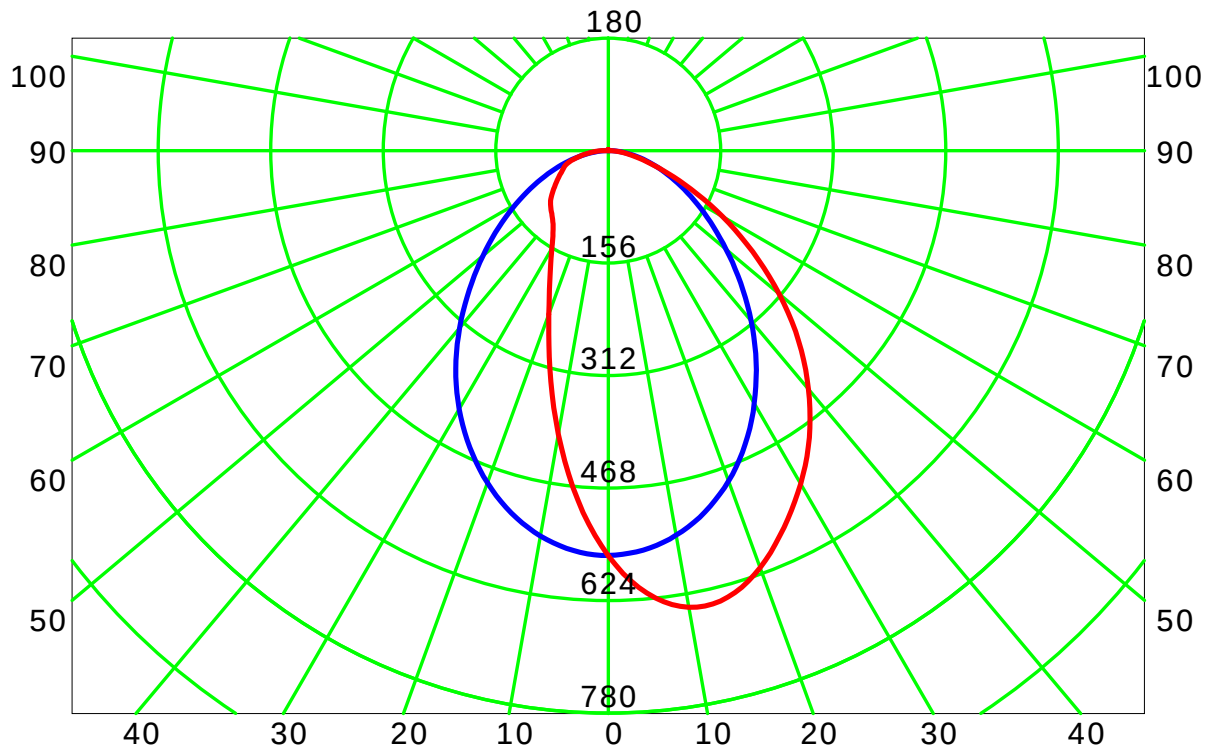

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd / klm)

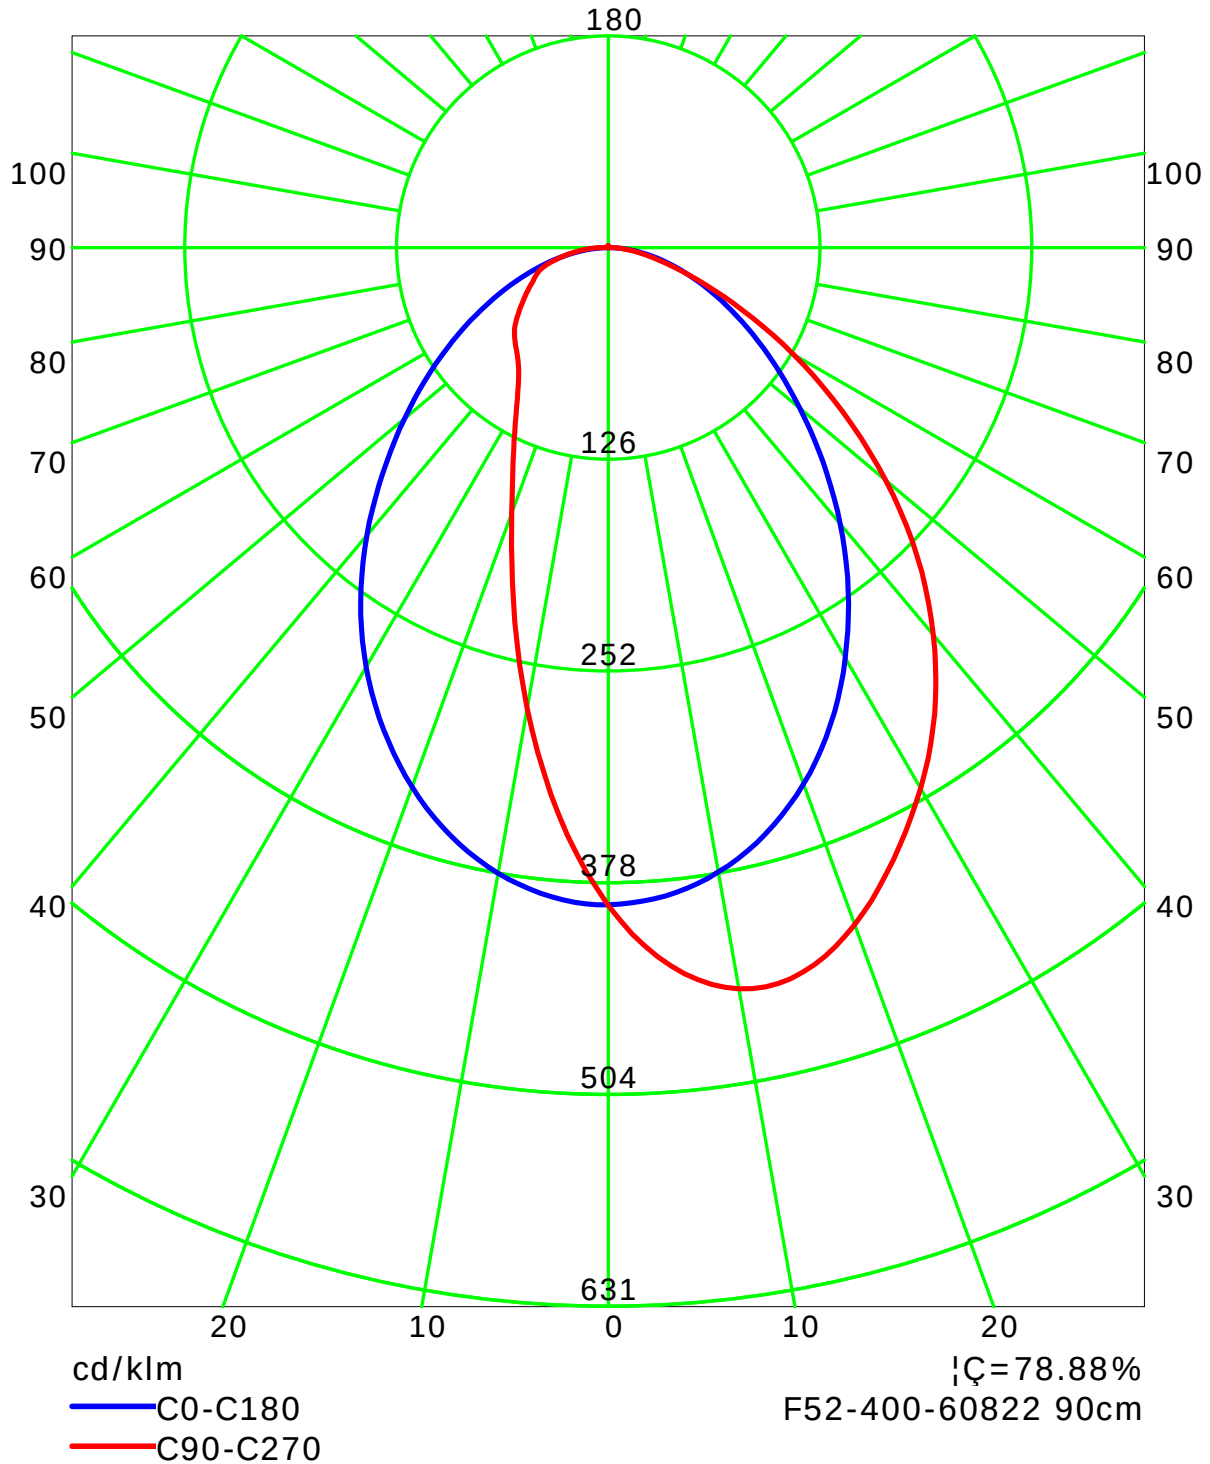

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:

Isocandela (rectangle)

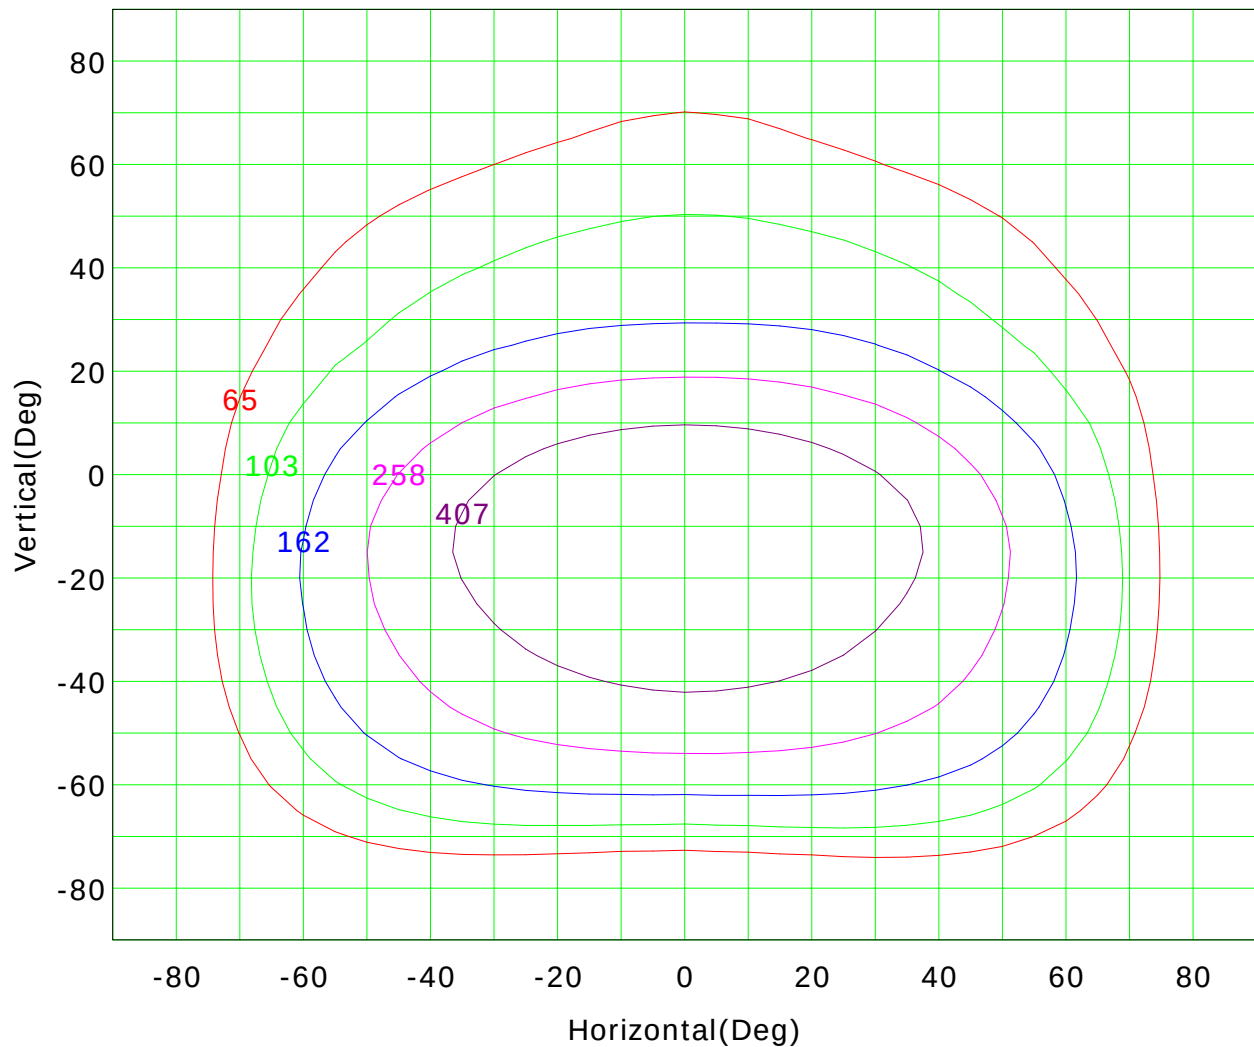

I_{max} (100%): 646 cd

(10%):	65 cd	(16%):	103 cd
(25%):	162 cd	(40%):	258 cd
(63%):	407 cd	(100%):	646 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

Isocandela (sphere)

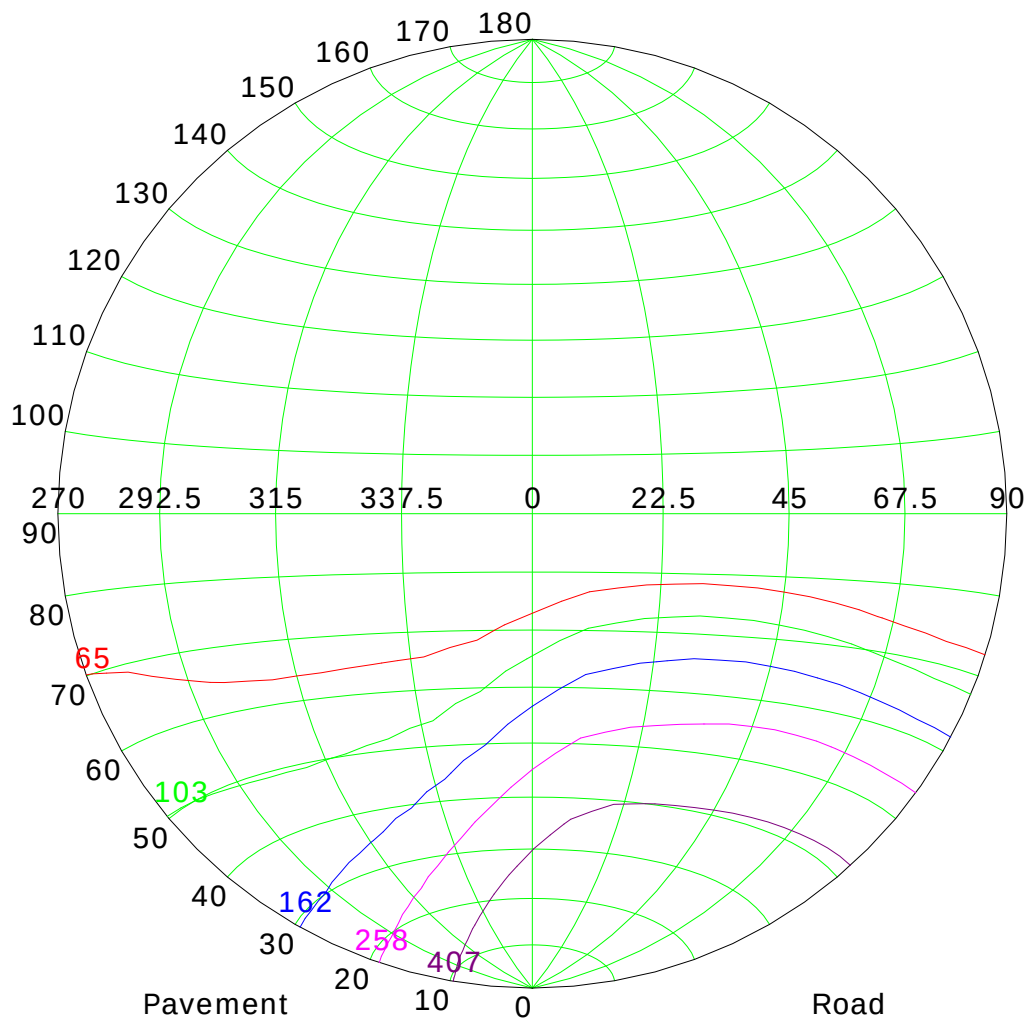

I_{max} (100%): 646 cd

(10%): 65 cd	(16%): 103 cd
(25%): 162 cd	(40%): 258 cd
(63%): 407 cd	(100%): 646 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

IsoLux Plot

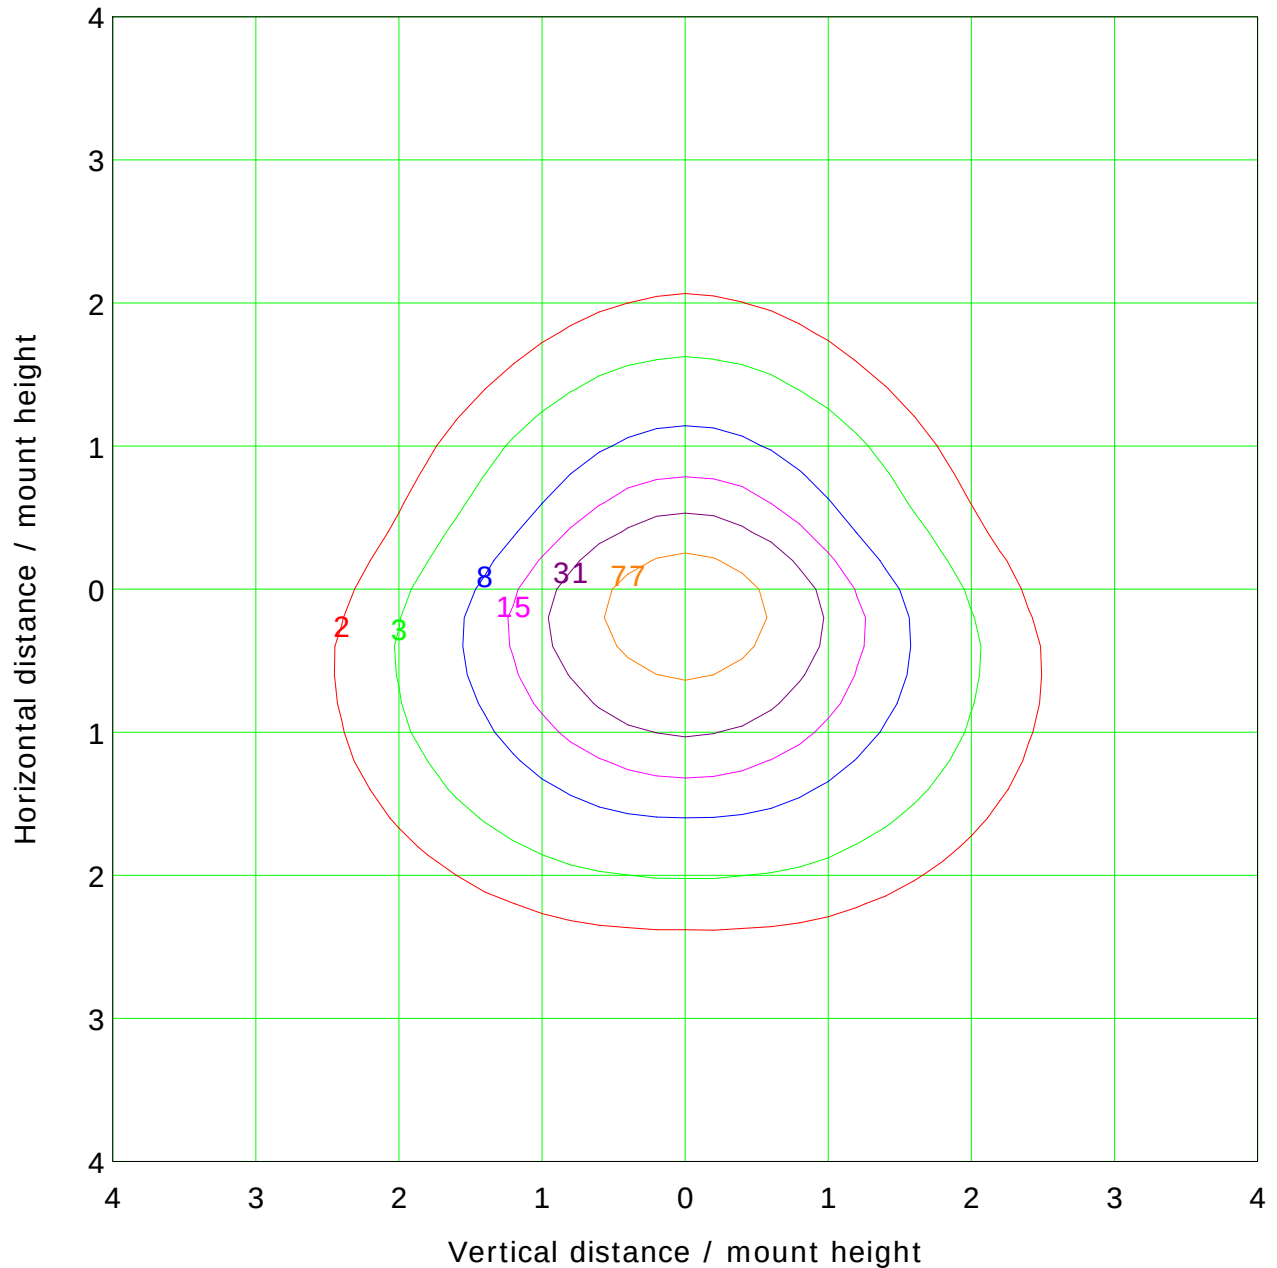

Mounting Height: 2.0m		Max Lux(100%): 154.4 lx	
— (1%):	1.5 lx	— (2%):	3.1 lx
— (5%):	7.7 lx	— (10%):	15.4 lx
— (20%):	30.9 lx	— (50%):	77.2 lx
— (100%):	154.4 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 7.979 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

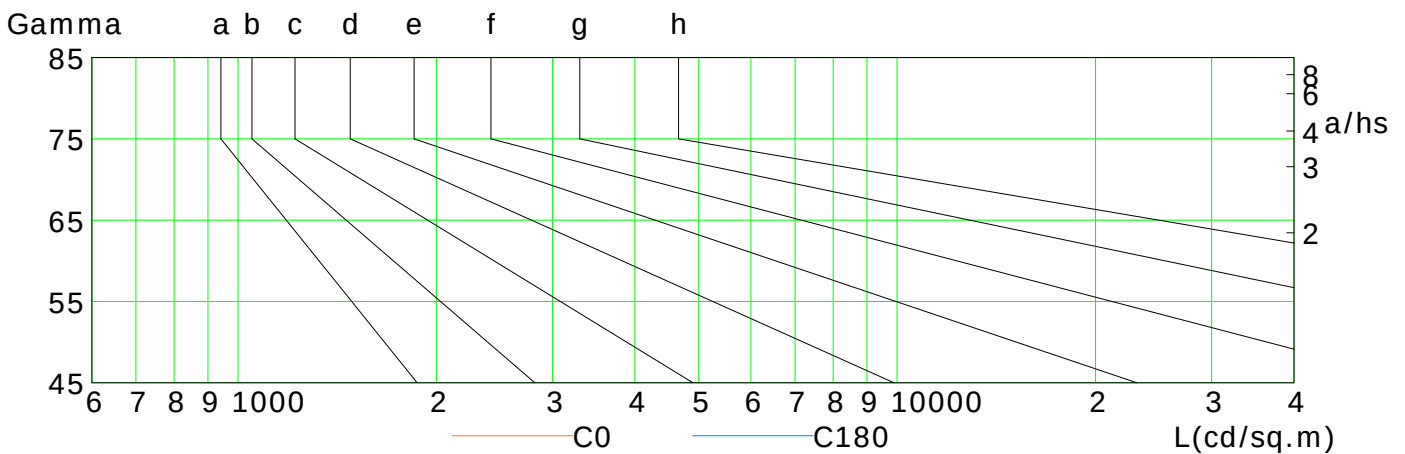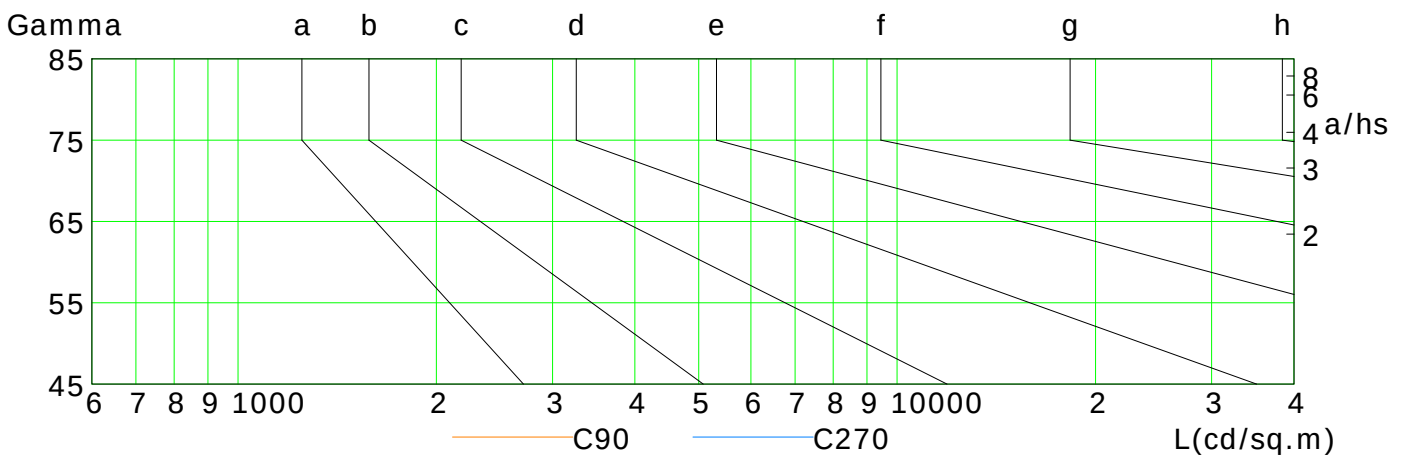

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	260	214	173	137	106	79	55	34	15
C90	373	309	245	183	127	82	50	29	13
C180	273	227	186	148	114	84	58	35	15
C270	113	104	93	82	72	65	53	37	21

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m


Humidity:

Inspector:

Illuminance at a Distance

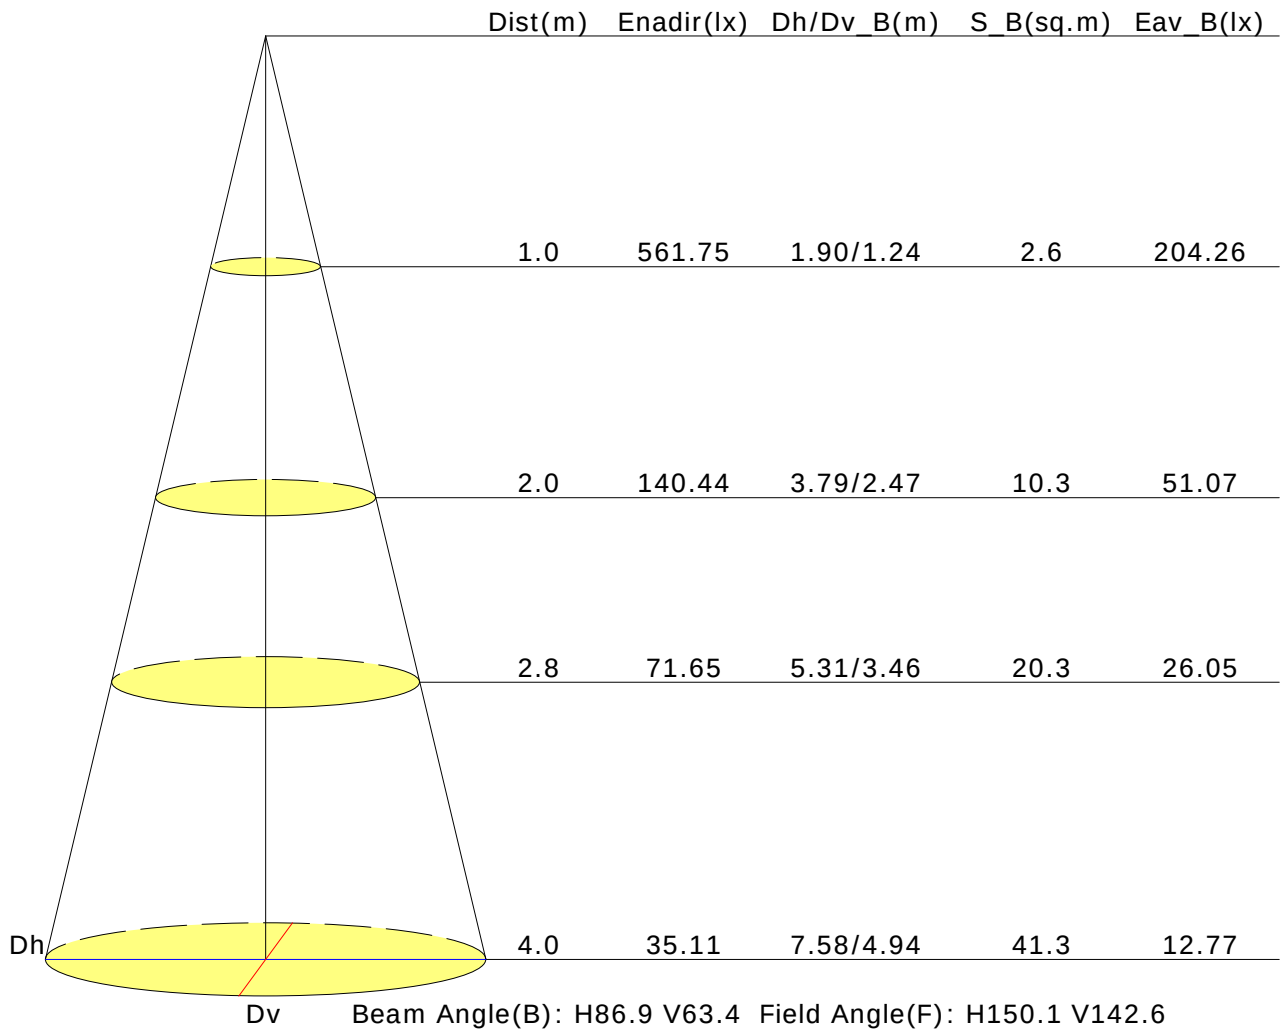

Vertical IsoLux Plot

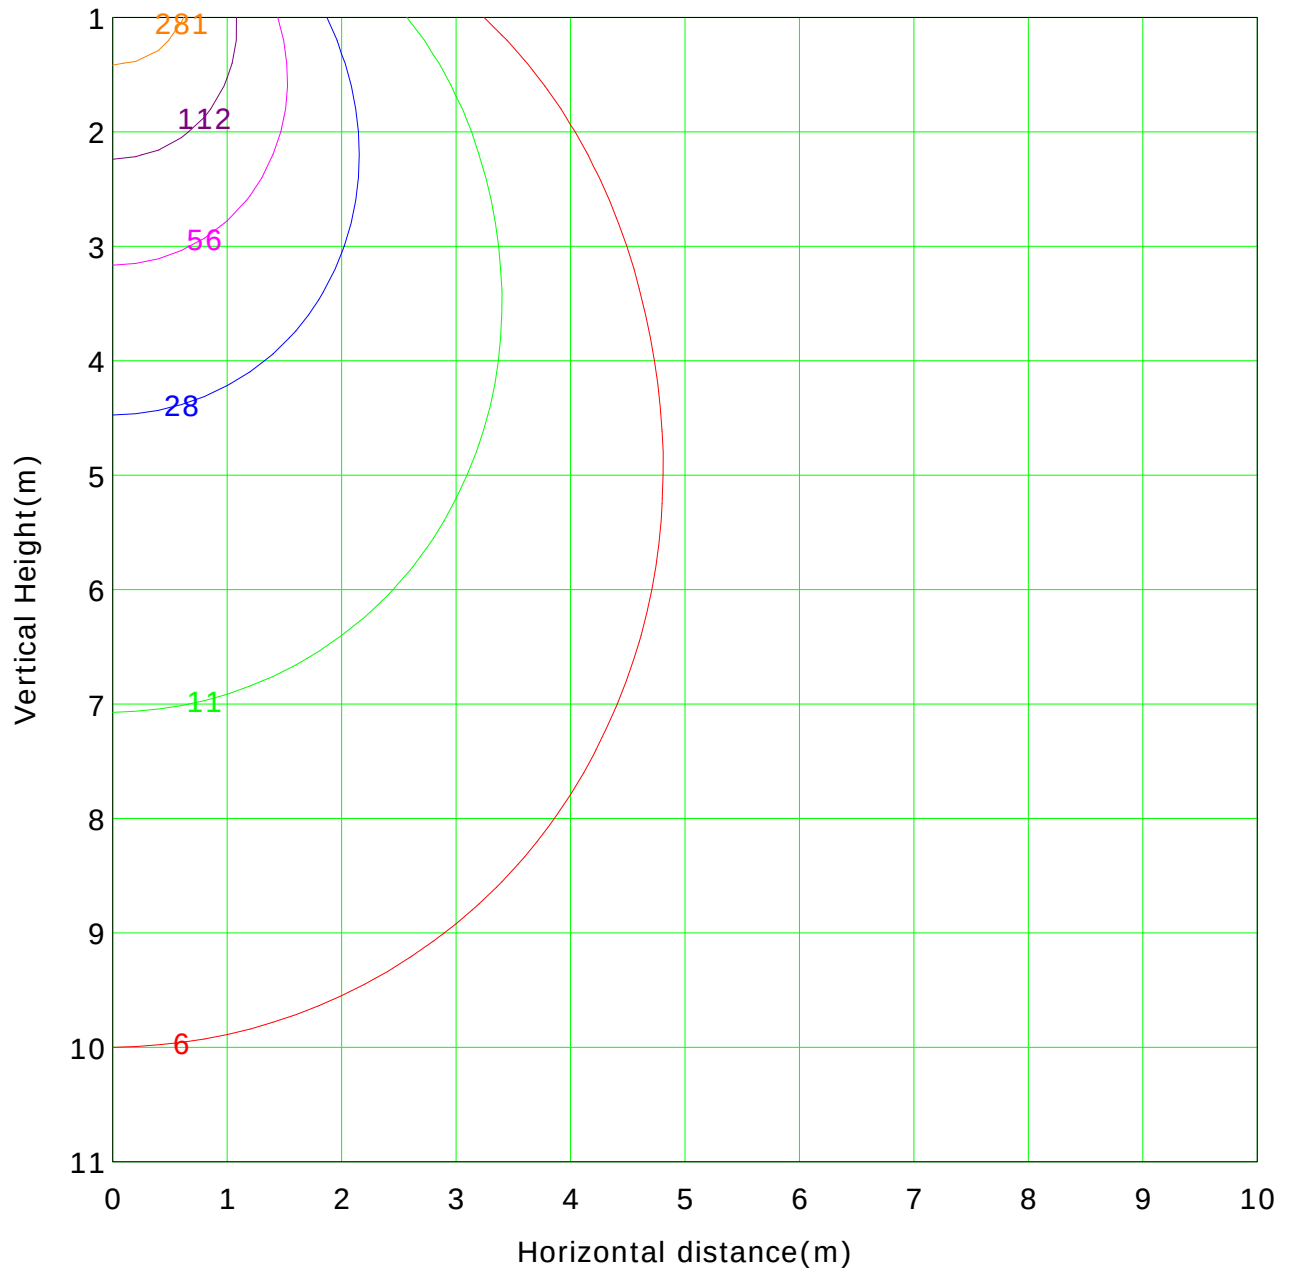

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 561.8 lx

(1%): 5.6 lx	(2%): 11.2 lx
(5%): 28.1 lx	(10%): 56.2 lx
(20%): 112.3 lx	(50%): 280.9 lx
(100%): 561.8 lx	

Report No.:

Test Time: 20/01/2021 12:12

Luminaire Property

Luminaire Manufacturer: Lighting Line

Luminaire Description: LLP-SL02-06 + LLD-06-XK-L4

Lamp Description: F52-400-60822 90cm

Number of Lamps: 1

Lumens per Lamp: 1434 lm

Voltage: 24.0 V

Current: 0.531 A

Power: 12.74 W

Power Factor: 1.000

Photometric Results

CIE Class: Direct

Measurement Flux: 1233.5 lm

Downward Ratio: 85.69%

Total Rated Lamp Lumens: 1434.0 lm

Efficiency: 86.02%

Upward Ratio: 0.33%

Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 161.9, 137.2, 140.2, 140.7

Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 99.2, 87.6, 98.3, 98.9

Luminaire Efficacy Rating (LER): 96.87

Central Intensity: 376.97 cd


Max. Intensity: 569.56 cd

Pos of Max. Intensity: H280 V25


S/MH(C0/C180): 1.19

S/MH(C90/C270): 1.59

Picture Of Luminaire

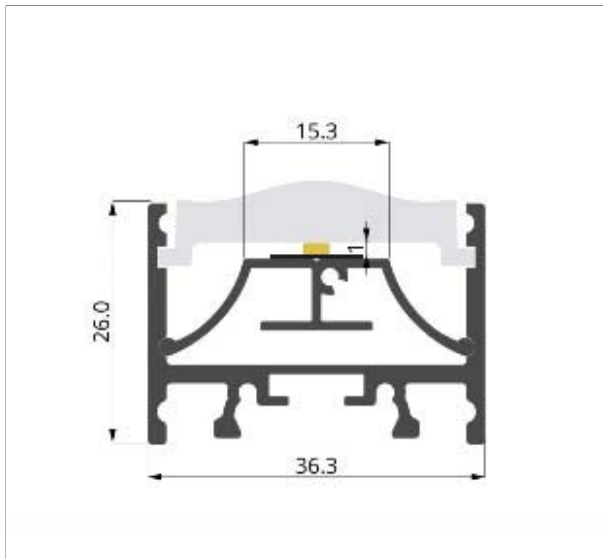

Luminous Intensity Distribution Curve

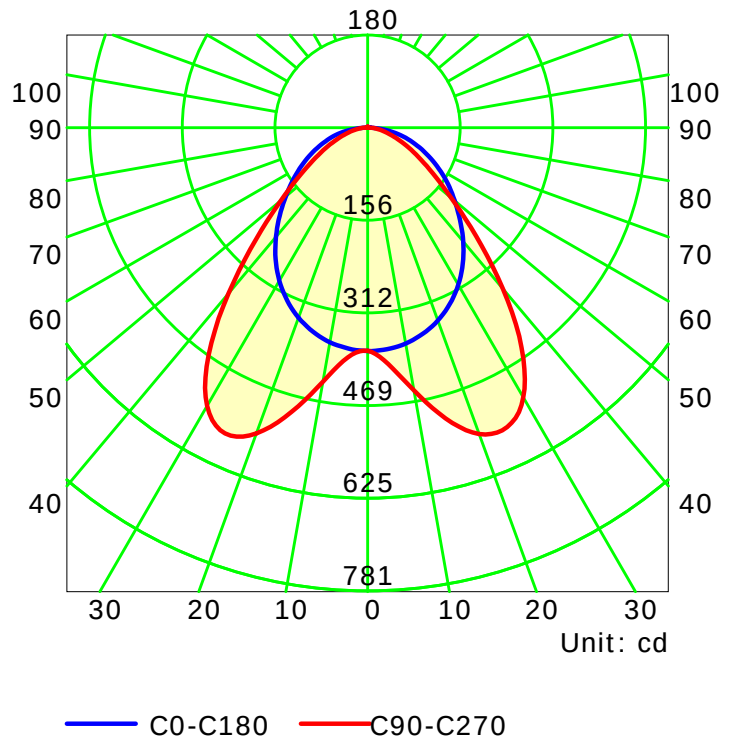

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0



Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:


Luminous Intensity Distribution Curve

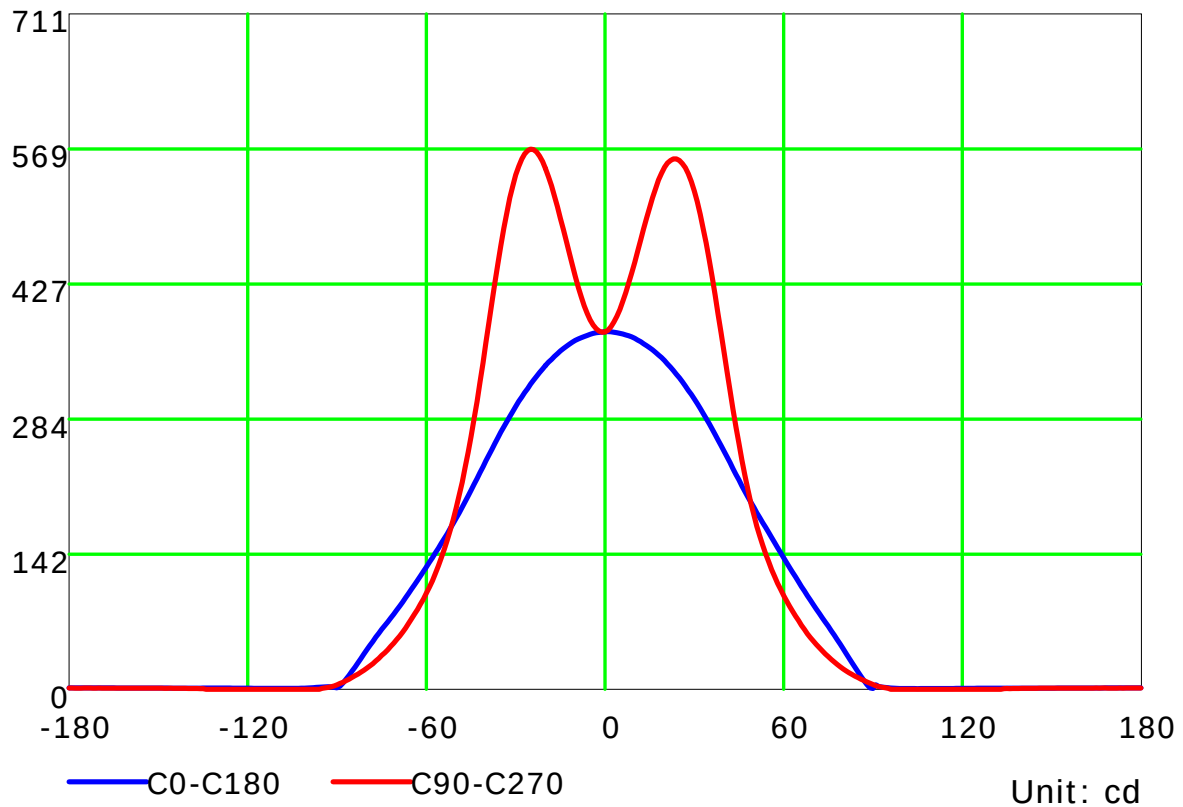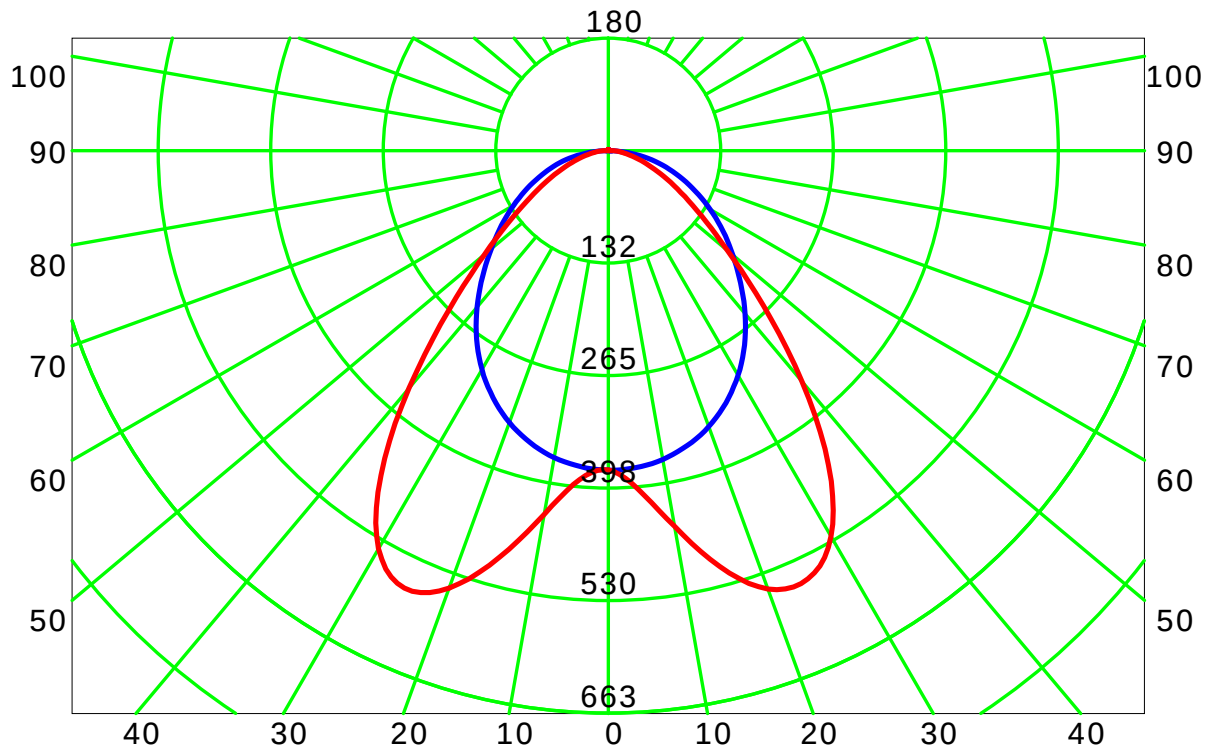

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:


Luminous Intensity Distribution Curve(cd / klm)

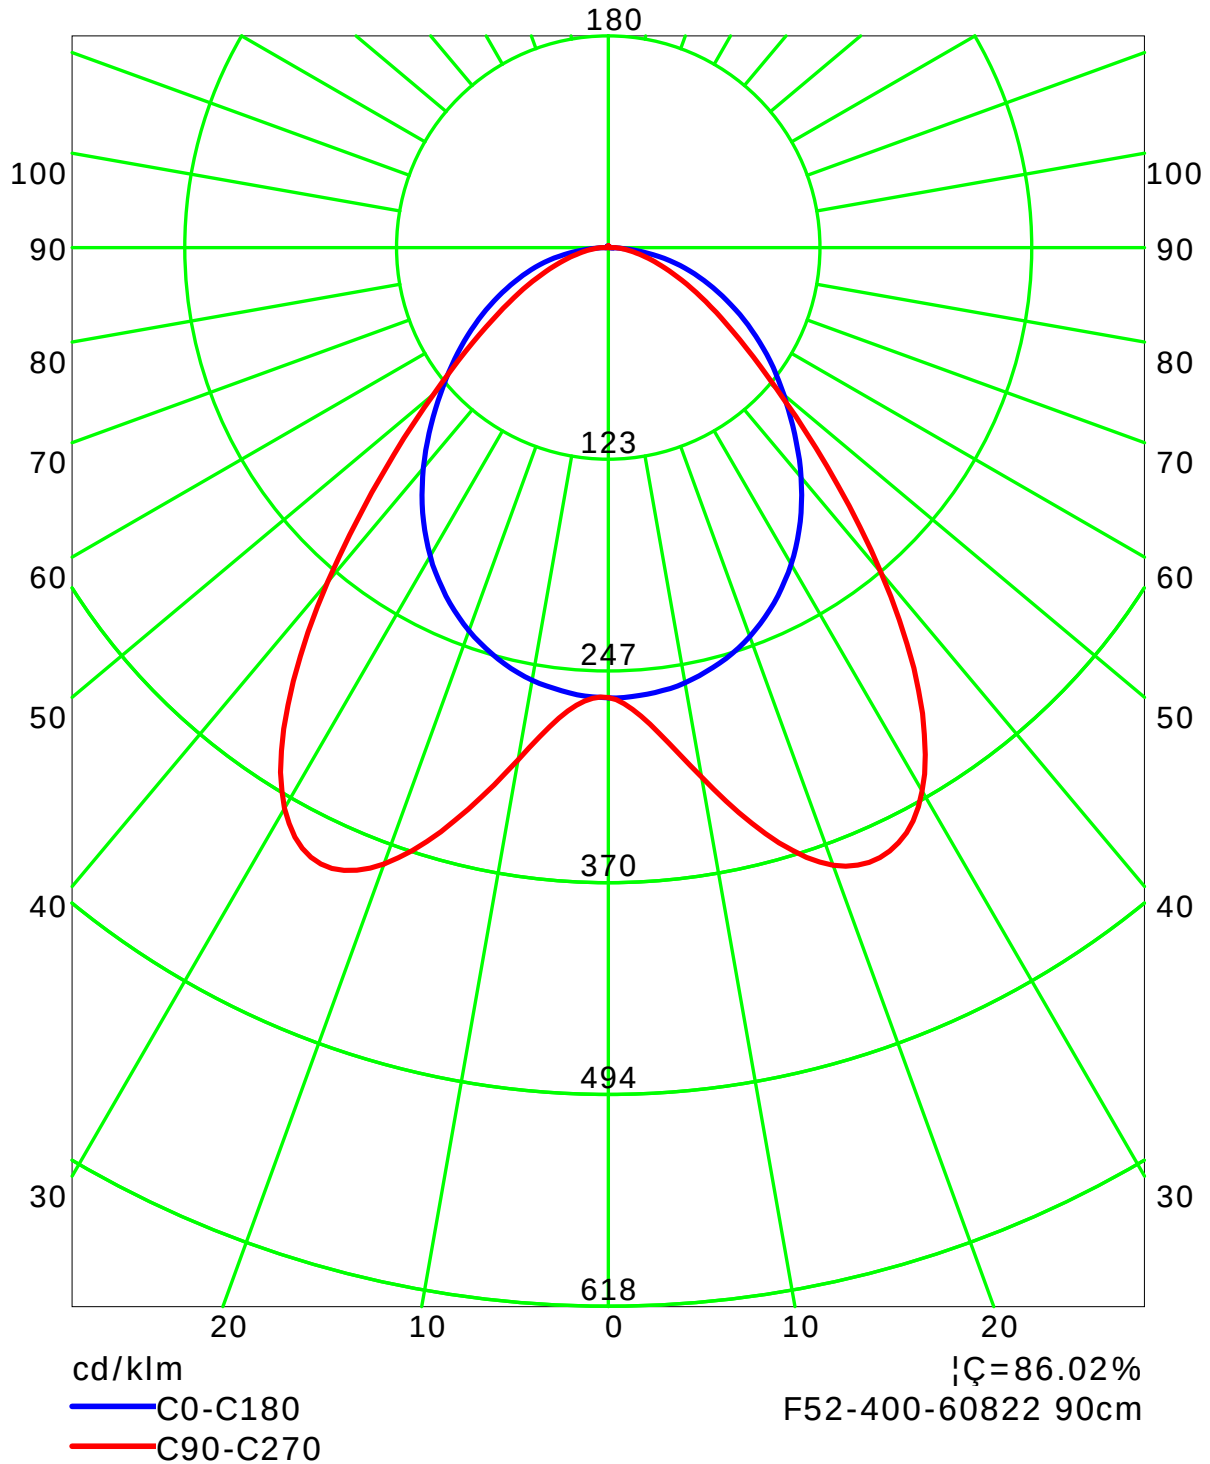

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector:

Isocandela (rectangle)

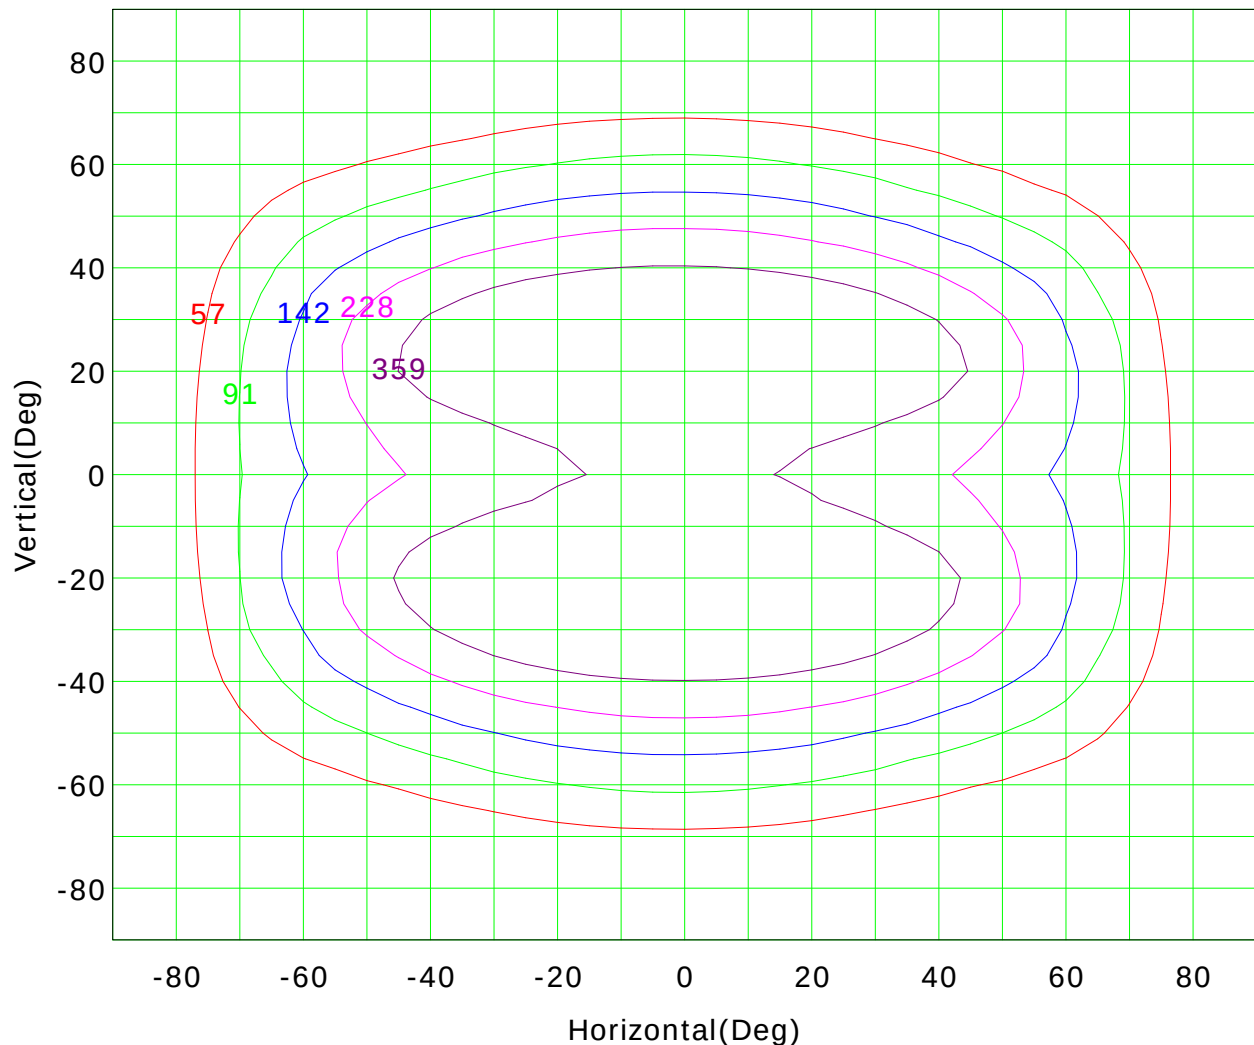

I_{max} (100%): 570 cd

(10%):	57 cd	(16%):	91 cd
(25%):	142 cd	(40%):	228 cd
(63%):	359 cd	(100%):	570 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

Isocandela (sphere)

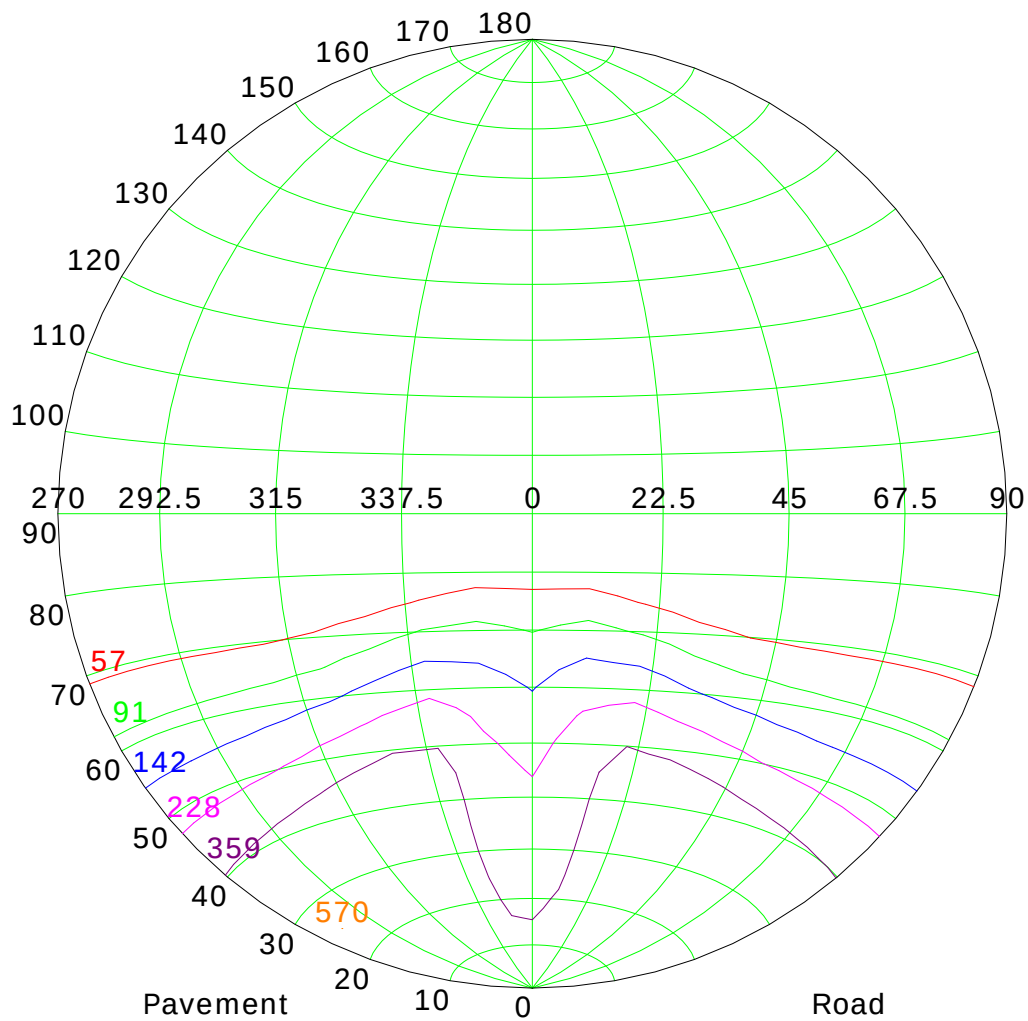

I_{max} (100%): 570 cd

(10%):	57 cd	(16%):	91 cd
(25%):	142 cd	(40%):	228 cd
(63%):	359 cd	(100%):	570 cd

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m

Humidity:

Inspector:

IsoLux Plot

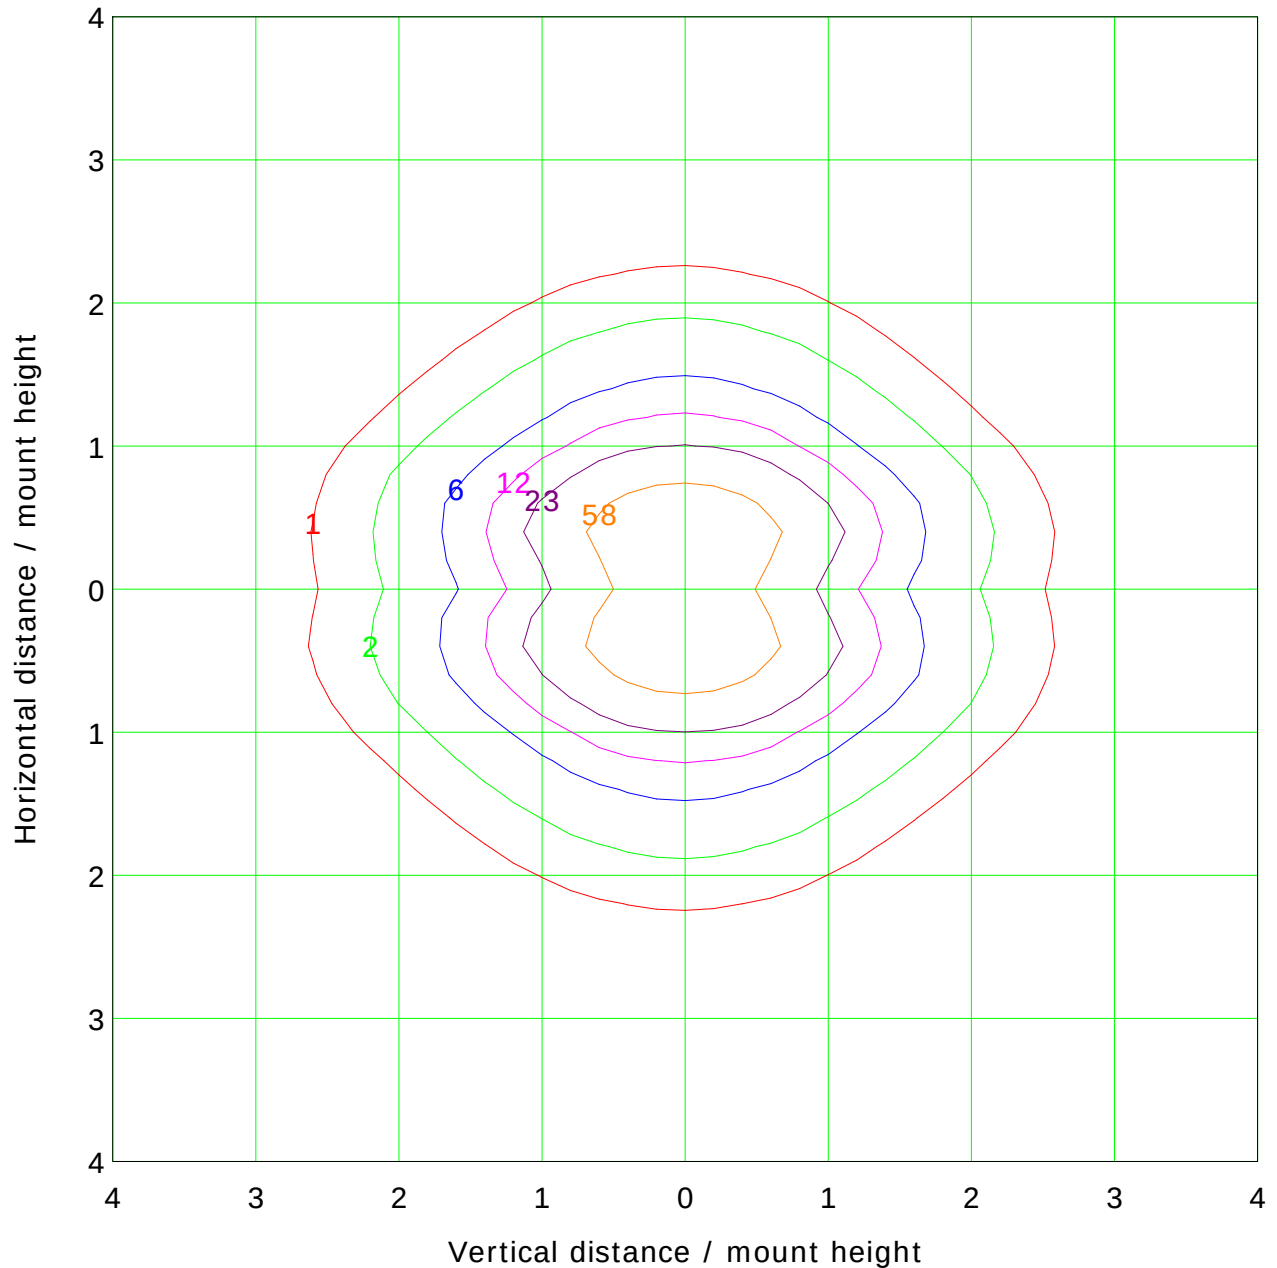

Mounting Height: 2.0m		Max Lux(100%): 115.5 lx	
— (1%):	1.2 lx	— (2%):	2.3 lx
— (5%):	5.8 lx	— (10%):	11.5 lx
— (20%):	23.1 lx	— (50%):	57.7 lx
— (100%):	115.5 lx		

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0

Test Device: GPM-1800B

Distance: 7.979 m



Humidity:

Inspector:

Lum Limit Curve

Dazzle	Quality	Illuminance (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300

a b c d e f g h

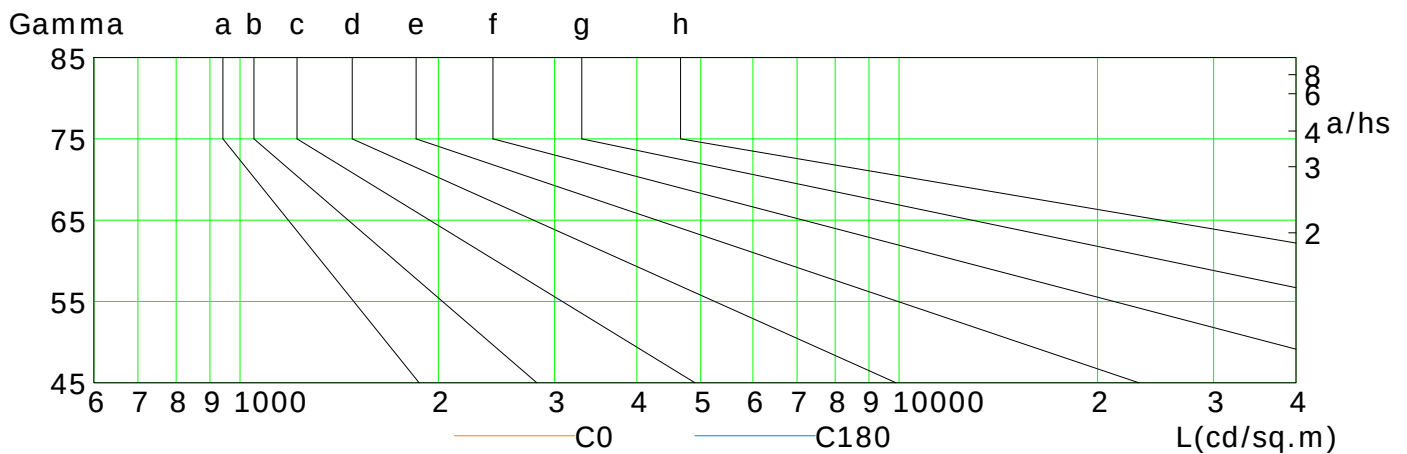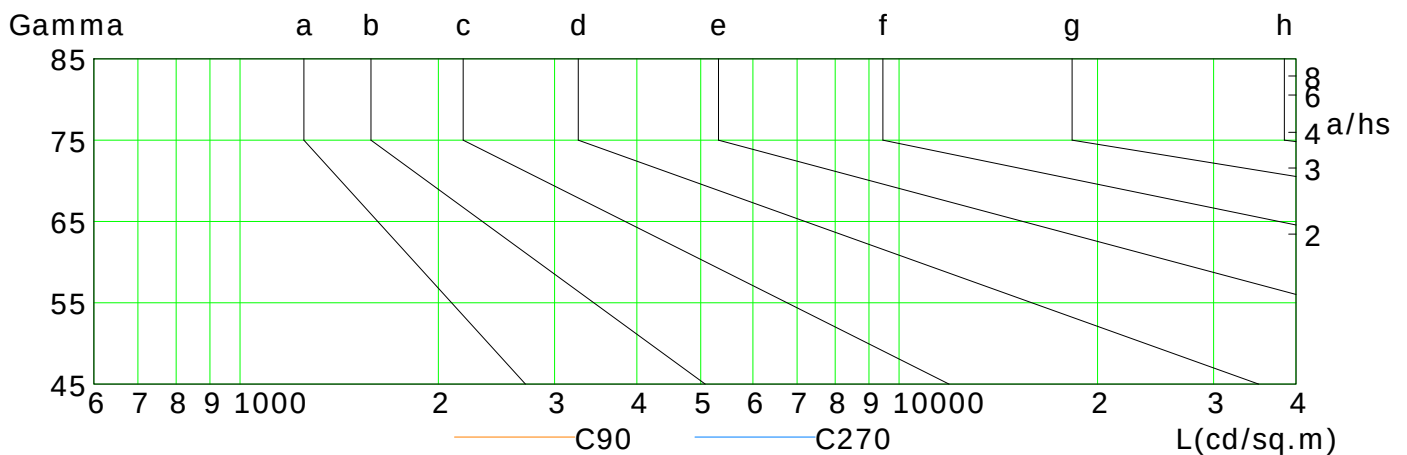

L(cd/sq.m)	G45	G50	G55	G60	G65	G70	G75	G80	G85
C0	221	192	165	139	114	89	67	43	18
C90	259	184	134	99	73	51	35	22	12
C180	210	180	154	129	106	83	63	42	19
C270	266	191	139	102	74	52	36	22	13

C Plane (°):0.0-360.0: 10.0

Test Lab:

Test Type: TYPE C

Temperature:

Operator:

Gamma Plane (°):0.0-180.0:1.0


Test Device: GPM-1800B

Distance: 7.979 m


Humidity:

Inspector:

Illuminance at a Distance

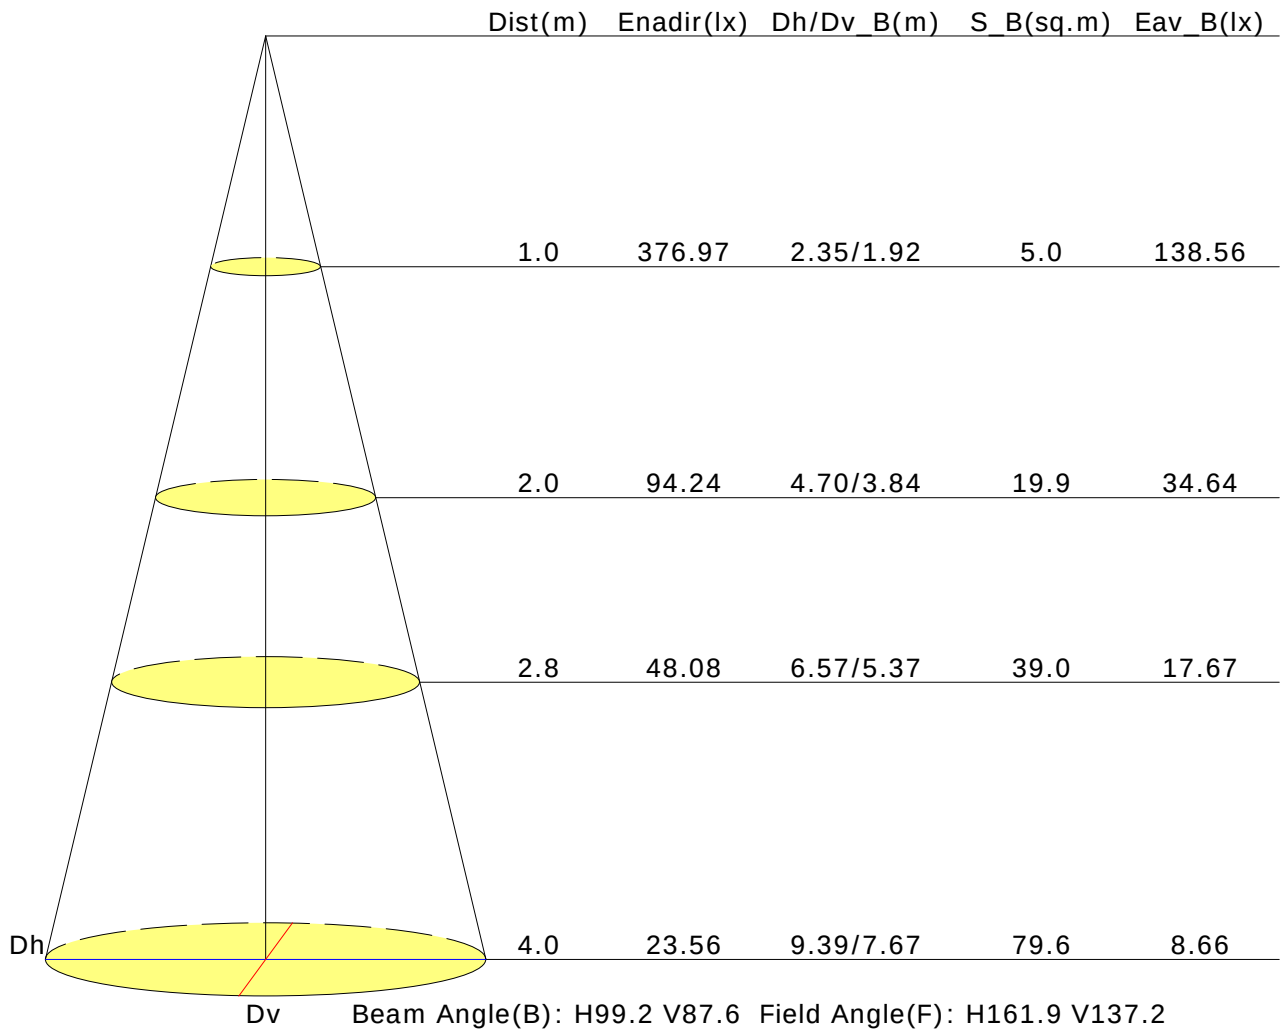

Vertical IsoLux Plot

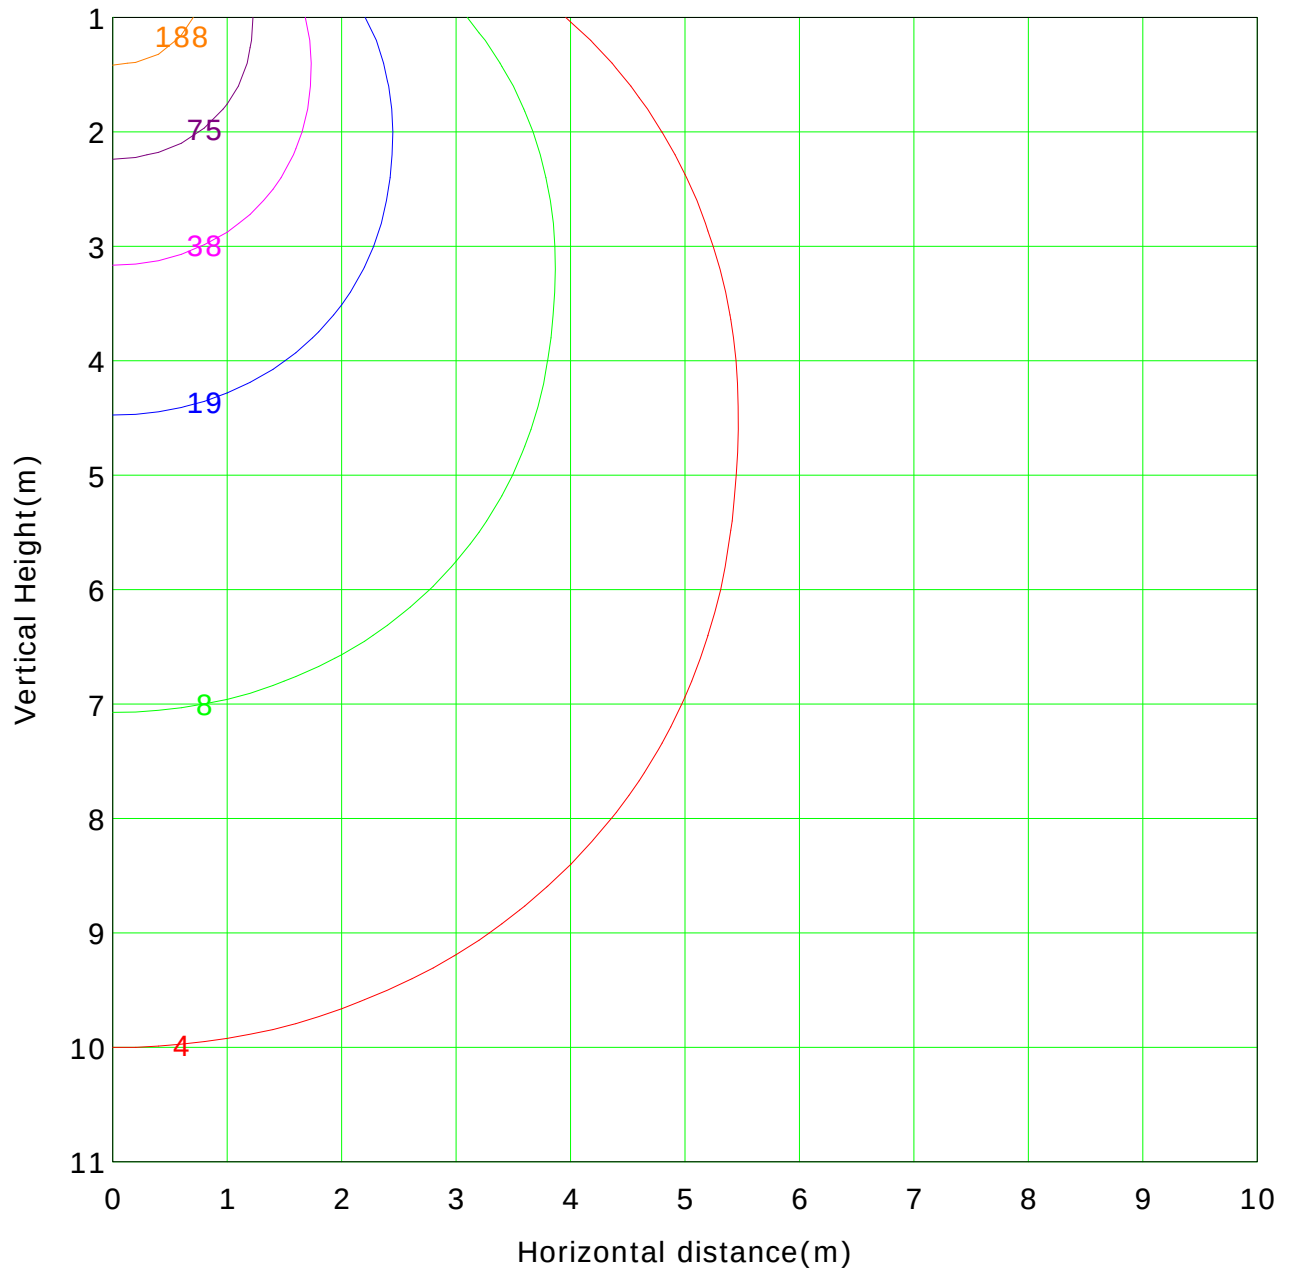

Lowest(m): 1.0m Highest(m): 11.0m Max Lux: 377.0 lx

— (1%): 3.8 lx	— (2%): 7.5 lx
— (5%): 18.8 lx	— (10%): 37.7 lx
— (20%): 75.4 lx	— (50%): 188.5 lx
— (100%): 377.0 lx	

C Plane (°):0.0-360.0: 10.0
Test Lab:
Test Type: TYPE C
Temperature:
Operator:

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1800B
Distance: 7.979 m
Humidity:
Inspector: