

LED Test Report

Product Mark

Product Type :F52-FF00-120812 Manufacturer :

Temperature : 'C Humidity : %


Operator : Test Date :2017-09-01 12:13:26

Product Type :F52-FF00-120812 Manufacturer :

Temperature : 'C Humidity : %

Operator : Test Date :2017-09-01 12:13:26

Remark:

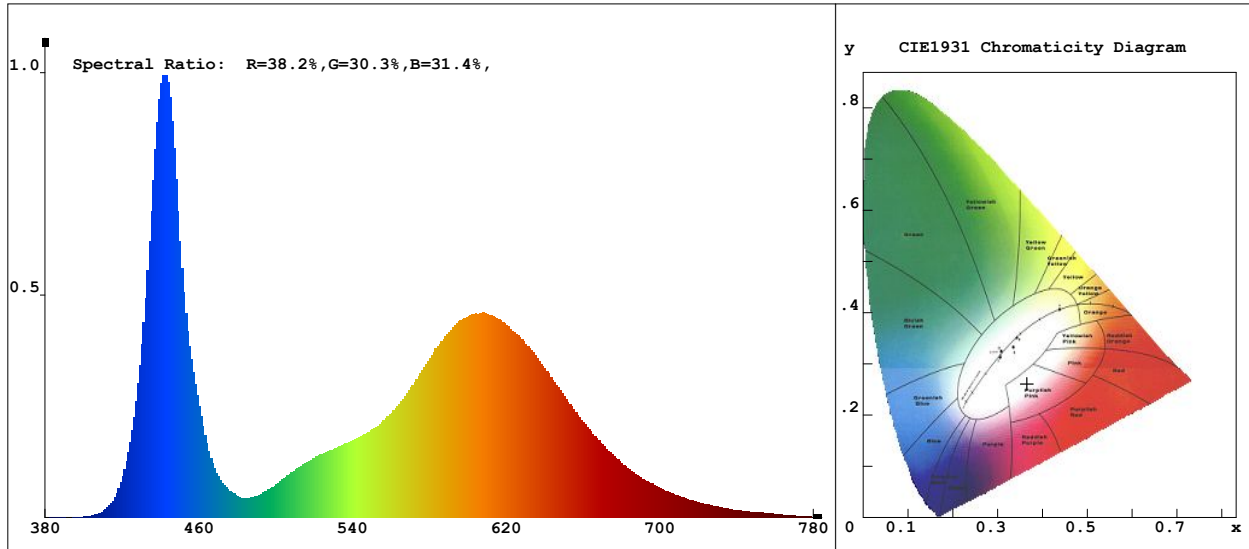

Chroma Parameters

Chro. Coord.: x=0.3651 y=0.2610 u=0.2704 v=0.2899 duv=-0.0609

CCT: 3112K Dominant Wave.:0.0nm Purity:0.0%

Flux RGB Ratio:R=27.5%,G=69.5%,B=3.0% Peak Wave:442.6nm Half Width:18.9nm

Rendering Index:Ra= 81.7

R1 =91 R2 =90 R3 =88 R4 =78 R5 =93 R6 =79 R7 =68 R8 =67

R9 =52 R10=85 R11=77 R12=73 R13=91 R14=96 R15=91

Photo Parameters

Flux:1313.56lm Effi.:70.9lm/W Radiant:4974.1mW Iv:0.0mcd

Ele. Parameters

Voltage: $U=24.000V$ Current: $I=0.7710A$

Voltage: $U=24.000V$ Current: $I=0.7710A$

Power:P=18.53W Power Factor:PF=1.000

Power:P=18.53W Power Factor:PF=1.000

Instrument state

Instrument: Lisun LMS-8000 Integral Time: 42.769ms VPeak: 14920

Instrument: Lisun LMS-8000 Integral Time: 42.769ms VPeak: 14920

Instrument: Lisun LMS-8000 Integral Time: 42.769ms VPeak: 14920

VDark: 1277 Scan Range: 380-780nm Product ID: 201508924

VDark: 1277 Scan Range: 380-780nm Product ID: 201508924

VDark: 1277 Scan Range: 380-780nm Product ID: 201508924